

DS-085

Ultra-slim 4 Display Digital Signage Player



Introduction

Measuring at 19 mm thick, DS-085 is the world's slimmest digital signage player powered by Intel TGL UP3 series. This thin-and-powerful signage player is equipped with 4 x HDMI display which is capable to achieve up to 4K resolution, and delivers a premium visual experience when graphics performance really matters. Windows 10 OS, Linux are supported, and Advantech WISE-PaaS/SignageCMS, Web-based content management software, is also free on offer. We've designed the DS-085 in the smallest possible form factor, for optimized performance.

Specifications

		DS-085SGB-U1A1E, Celeron 6305E, DS-085SGB-U2A1E, i3 1115G4E, DS-085SGB-U3A1E, i5 1145G7E, DS-085SGB-U6A1E, i5 1135G7,	DS-085LGB-U1A1E, i7 1165G7, DS-085LGB-U2A1E, Celeron 6305E, DS-085LGB-U3A1E, i3 1115G4E, DS-085LGB-U4A1E, i5 1145G7E, DS-085LGB-U5A1E, i5 1135G7
Processor	Chipset	Integrated in SOC	
	BIOS	AMI uEFI 128 Mbit	
Memory	Technology	DDR4 2666MHz	
	Max. Capacity	32GB (16GB per SO-DIMM)	
	Socket	2 x 260-pin SODIMM	
CPU TDP		15W	28W
Thermal Solution		Fanless	
Display	Graphics Engine	Intel UHD graphics	
	Output	HDMI 2.0 x 4	
	Resolution	3840 x 2160 @ 60Hz	
Ethernet	Controller	Intel I219-LM & Realtek RTL8111FP	
	Interface	Gigabit LAN Controller	
	Connector	2 x RJ-45	
I/O Interfaces	Audio	1 (Line-Out/Mic-In/Headset)	
	LAN (RJ-45)	2	
	HDMI	4	
	USB	4 (2.0x2, 3.0x2)	8 (2.0x6, 3.0x2)
	Serial Port (RS-232)	1	2
	PSW	1 x Power on/off button	
	Function Button	Reserve for OEM demand	
	IR Phone Jack	Reserve for OEM demand	
	DIO & External Power	N/A	Yes
	LED Indicators	1 x Power, 1 x HDD Access	
	Storage	M.2	2242 M Key
WiFi & BT	M.2	2230 E Key	
Power Requirement	Power Management	ACPI 3.0	
	Input Voltage	19 V DC-in (ATX/AT mode)	
Watchdog Timer	Output	Interrupt, system reset	
	Interval	255-level timer interval, setup by software	
Physical Characteristics	Mounting	VESA/Desk/Wall/Din Rail	
	Dimensions (W x D x H)	180 x 190 x 19mm	210 x 178 x 40mm
	Weight	0.87 kg	2.1 kg
Environment	Operating Temperature	0 ~ 40 °C with 0.7 m/s airflow	0 ~ 55 °C with 0.7 m/s airflow
	Relative Humidity	95% @ 40 °C (non-condensing), operating	
Operating System	Operating System	Win10 x64	
	Linux	supported by project	
Certifications	EMC	CE,FCC Class B,CCC,BSMI	
	Safety	UL,CB,CCC,BSMI	


Features

- Powered by 11th Gen Intel® Core™ i3/i5/i7 and Intel® Celeron® 6305E processors
- Powerful graphic engine - iRIS® Xe
- 19mm-thin chassis ideal for space-limited installation
- 4 HDMI display output, resolution up to 4K(3840 x 2160)
- Supports WISE-PaaS/DeviceOn and Embedded Software APIs
- Supports WebAccess/SignageCMS for intuitive signage content managing, remote monitoring and control


McAfee® Acronis WISE-PaaS/SignageCMS WISE-DeviceOn

Dimensions


Unit: mm [inch]

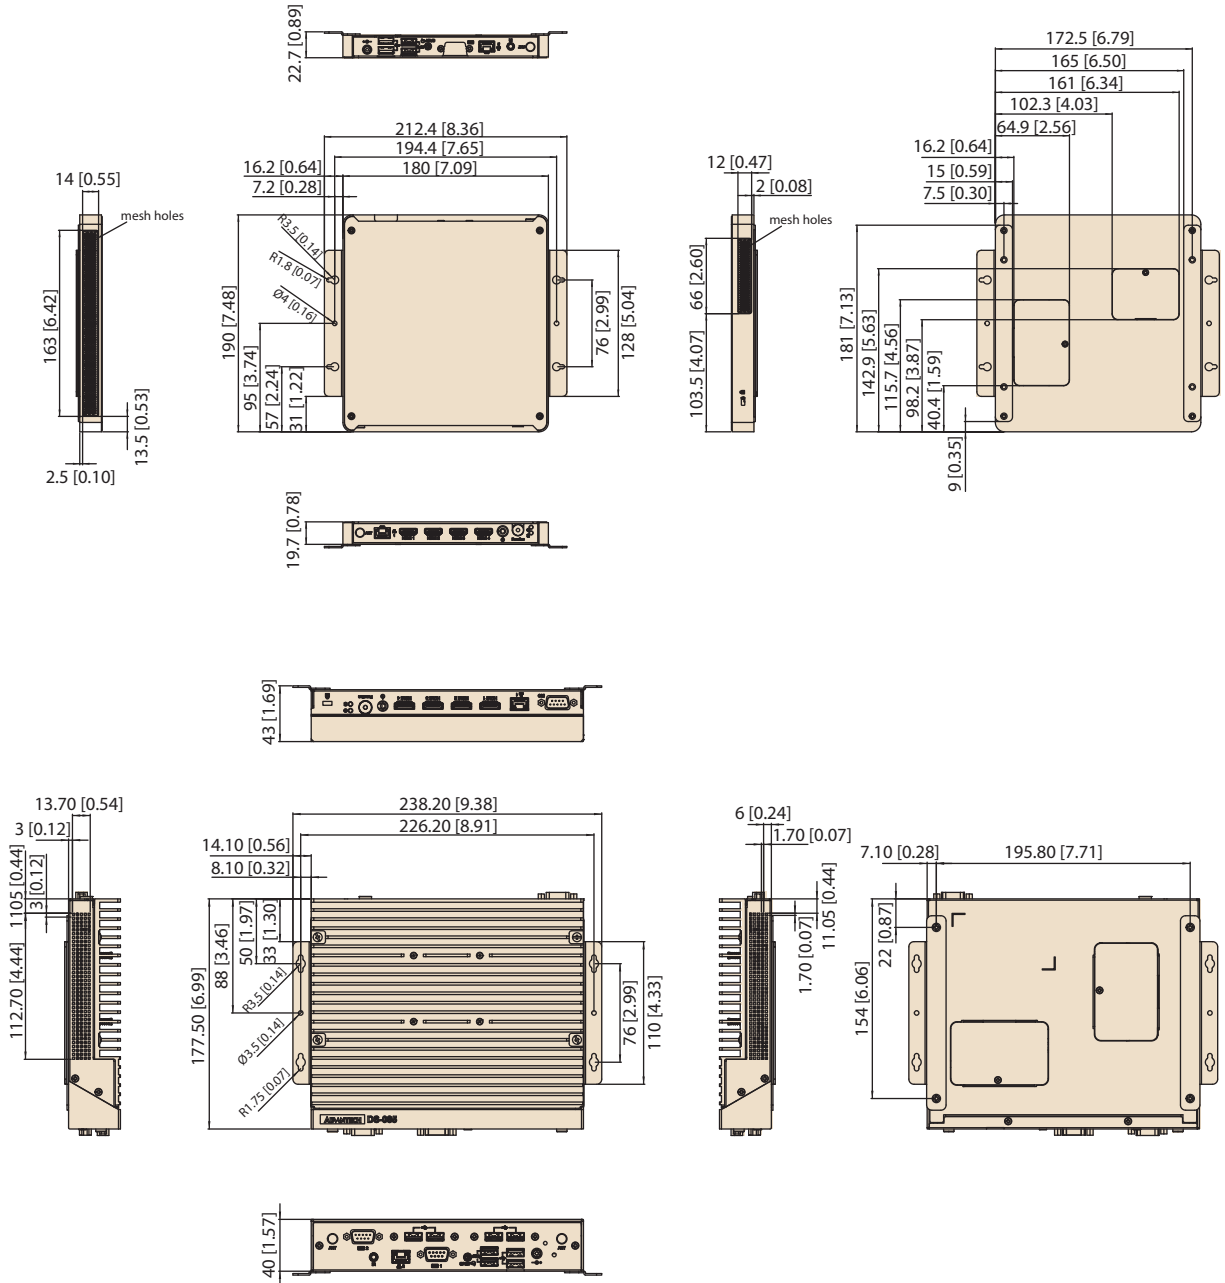

Front View

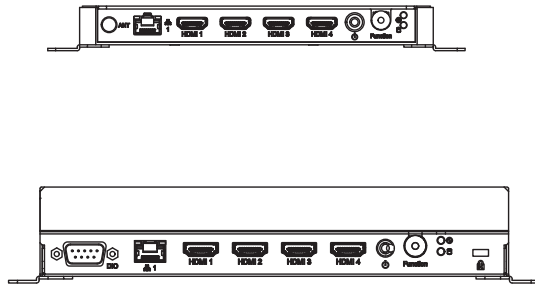

Rear View

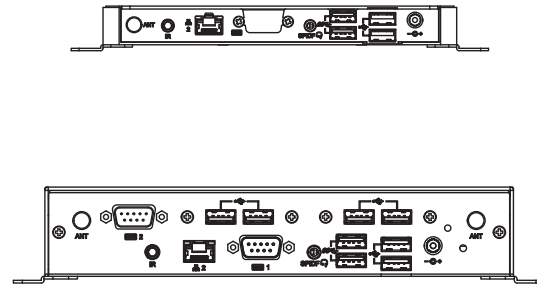

Ordering Information

Part Number	Description
DS-085SGB-U1A1E	DS-085, Small, Celeron 6305E, Barebones
DS-085SGB-U2A1E	DS-085, Small, i3 1115G4E, Barebones
DS-085SGB-U3A1E	DS-085, Small, i5 1145G7E, Barebones
DS-085SGB-U6A1E	DS-085, Small, i5 1135G7, Barebones
DS-085LGB-U1A1E	DS-085 Large, i7 1165G7, Barebones
DS-085LGB-U2A1E	DS-085 Large, Celeron 6305E, Barebones
DS-085LGB-U3A1E	DS-085 Large, i3 1115G4E, Barebones
DS-085LGB-U4A1E	DS-085 Large, i5 1145G7E, Barebones
DS-085LGB-U5A1E	DS-085 Large, i5 1135G7, Barebones

Packing List

Part Number	Description
-	1 x DS-085
-	1 x 19V Power adapter
-	1 x China RoHS
-	2 x Wall Mount Brackets
-	1 x User's Manual (En/TC/SC)
-	4 x Rubber foot and screws

RAM & Storage

Part Number	Description
SQR-SD4N4G2K6SNPCB	Memory, SQ, DDR4 4GB
SQR-SD4N8G2K6SNBCB	Memory, SQ, DDR4 8GB
SQR-SD4N16G2K6SNCB	Memory, SQ, DDR4 16GB
SQF-SM4V2-64GCSBC	Storage, M.2 2242, SQ, TLC, 64GB
SQF-SM4V2-128GCSBC	Storage, M.2 2242, SQ, TLC, 128GB
SQF-SM4V2-256GCSBC	Storage, M.2 2242, SQ, TLC, 256GB
SQF-SM4V2-512GCSBC	Storage, M.2 2242, SQ, TLC, 512GB

Embedded OS

Part Number	Description
20706WX9EM0034	Win10 IoT 2019 64 Bit Entry, for Intel Celeron
20706WX9VM0026	Win10 IoT 2019 64 Bit Entry, for Intel i3/i5
20706WX9HM0030	Win10 IoT 2019 64 Bit Entry, for Intel i7

Power Cord

Part Number	Description
1700001524	3-pin power cord (US)
170203183C	3-pin power cord (EU)
170203180A-01	3-pin power cord (UK)
1700008921	3-pin power cord with PSE (Japan)
1700019146	3-pin power cord (CCC)
1700018553	3-pin power cord (AU)
1700024849-01	3-pin power cord (TW)

Optional Items

Part Number	Description
AMK-V005E	VESA mount kit (Generic for ARK-DS/DS)
AMK-V017E	DS products VESA with Din Rail bracket
EWM-W163M201E	EWM-W163 M.2 2230 WIFI & BT

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.