

ECU-1051TL

Cloud enabled Intelligent Communication Gateway for IIOT application

NEW



CE FCC RoHS COMPLIANT PRODUCT

Features

- TI Cortex A8 600MHz CPU with DDR3L 256MB RAM
- Support web service for remotely on-line monitoring
- Firmware update by SD card and online update
- Data logger on SD card
- Support dual SIM slots for communication redundant
- Support MQTT Client for cloud communication
- Wide Operating temperature: -40 ~ 70°C

Introduction

For facility monitoring, distributed solar power, smart factory sector, especially cloud based applications which require a total wireless and Ethernet communication solutions, Advantech has released the ECU-1051TL RISC-based industrial communication gateway. ECU-1051TL has an open platform design with Cortex A8 processor, two 10/100 Ethernet ports and operating temperature range of -40~70°C. With Linux operating system and open Edgeline SDK, which enable to system integrators to develop applications which precisely fit their need.

Specifications

General

- **Certification** CE, FCC (No RED certification)
- **Mounting** Wall-Mount/ DIN-Rail
- **Power consumption (typical)** 2.4W @ 24V_{DC}
- **Power Requirements** 10 ~ 30 V_{DC}

System

- **CPU** TI Cortex A8, 600MHz
- **Memory** DDR3L 256MB
- **Indicators** LEDs for Power, LAN (LINK, ACT), Programmable
- **Storage** 512MB NAND Flash
- **SD Slot** 1 x Micro-SD slot
- **Watchdog** Yes
- **Real-time clock** Yes

Communication

- **Serial Port** Serial Port: 2 x RS232/RS485 (isolation optional)
- **Serial Port Speed** RS-232/RS-485: 50 ~ 115200 bps
- **Ethernet Port** 2 x 10/100 Base-T RJ-45 ports
- **Wireless (Optional)** Interface: 1x Mini-PCle (Full-size)
Type: WIFI/Cellular/4G
Signal: USB

Communication Protocol Drivers

IEC-60870-5-104
Modbus TCP/RTU
MQTT
FTP/HTTP/DHCP/TCP/IP
100+ PLC drivers
Real-time datalogger
ODBC/FTP
Linux C, Restful API, Web service API.
Event Manager

- **PLC Driver Support**
- **Data Logger**
- **Database uplink**
- **Programming support**

Software

- **OS Support** RT-Linux 3.12
- **Configuration Tool** Advantech Edgeline Studio

Environment

- **Operating Temperature** -40~70°C
- **Storage Temperature** -40~85°C
- **Humidity** 5 ~ 95% (non-condensing)

Ordering Information

- **ECU-1051TL-R10AAE** TI Cortex A8 industrial communication gateway with Edgeline

Cellular Solution (SIM card is not included)

- **96PD-EC25EFA** LTE Cat 4 Module with GNSS
- **1750006264** SMA(F) Cable, 15 cm
- **1750005865** Dipole Antenna, 11 cm

WIFI Solution (recommended)


- **96PD-RYUW131** 2.4GHz Wi-Fi Full/Half Size Mini PCIe Card
- **1750006043** SMA(M) cable, 15 cm
- **1750000318** 2dBi antenna for testing, 11 cm

Storage Solution

- **96FMMSDI-4G-ET-AT1** ATP 4G MICRO SD CARD I-GRD SLC(G)
- **96FMMSDI-8G-ET-AT1** ATP 8G MICRO SD CARD I-GRD SLC(G)

Dimensions

Unit: mm

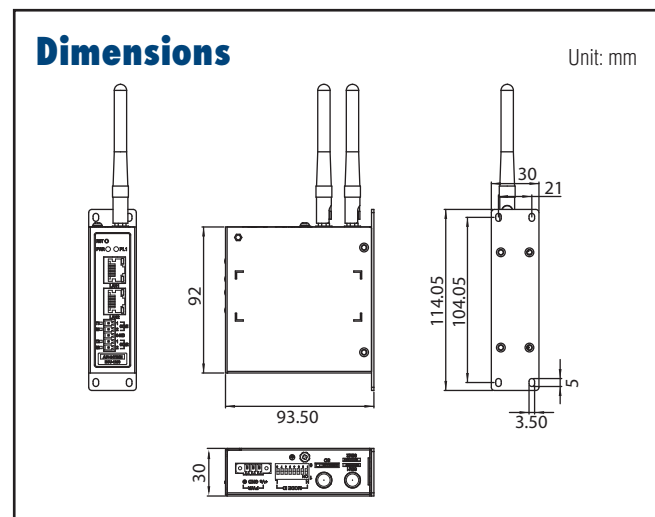

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.