

# HPC-8212

## 2U Storage Chassis for ATX/EATX Serverboard with 12 Hot-swap Drive Bays

**NEW**



### Features

- 2U rackmount chassis supports EATX/ATX/uATX motherboard
- 12-bay hot-swappable 3.5"/2.5" SAS 12Gb/s drives or SATA 6Gb/s drives
- 4 x Hot-swappable NVMe drives supported via an optional riser card
- Default 7x slots (low profile) rear panel, 3x slots (full height) optional
- Supports 80Plus redundant power supply

CE FCC

### Specifications

Drive Bay	3.5"/2.5"	Front 12 (Hot Swap)	Rear -
	2.5"	-	2 (for R6A1E SKU)
Cooling	Fan	4 (8 cm)	
	Air Filter	-	
Front I/O Interface	USB	2	
Miscellaneous	LED Indicators	LAN1, LAN2, HDD, Power, and Information LED	
Environment	Temperature	Operating 0 ~ 35 °C (32 ~ 95 °F)	Non-Operating -40 ~70 °C (-40 ~158 °F)
	Humidity	10 ~ 95% @ 40 °C, non-condensing	
	Vibration (5 ~ 500 Hz)	0.25 Grms	2 G
	Shock	10 G (with 11 ms duration, half sine wave)	
Physical Characteristics	Dimensions (W x H x D)	438 x 88.4 x 620 mm (17.24" x 3.48" x 24.41") / 438 x 88.4 x 540 mm (17.24" x 3.48" x 21.26")	
	Weight	25 kg (without hard drivers)	

### Front View




### Rear View



Optional full-height rear panel via  
98R112SE00E & 98R112AE00E

## Dimensions

Unit: mm [inch]

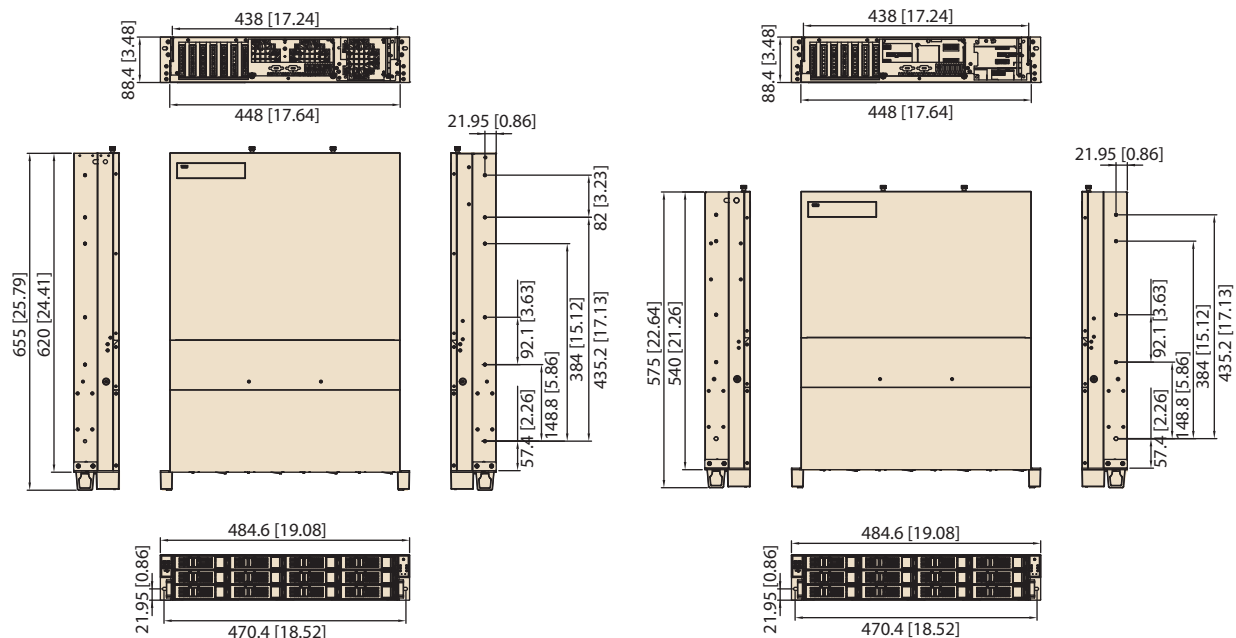

## Ordering Information

Part Number	Chassis Depth	Built-in PSU	Front HDD Backplane	Rear HDDs (2 x 2.5")	Default Rail Kit	Motherboard Form-factor	Expansion Slots
HPC-8212SE-80RB1	620mm	RPSU 800W	SAS12Gb/s	-	26"	EATX, ATX, uATX	x6* Low Profile
HPC-8212SE-65RB1	620mm	RPSU 650W	SAS12Gb/s	Hot-swap	26"	EATX, ATX, uATX	x6* Low Profile
HPC-8212SA-55RB1	540mm	RPSU 550W	SAS12Gb/s	-	22"	ATX, uATX	x6* Low Profile

Note: one slot will be occupied by SAS RAID card

## Packing List

Part Number	Description	Quantity
9680017208	22" Slide Rail Kit for HPC-8212SA	1
9680017207	26" Slide Rail Kit for HPC-8212SE	1

## Optional Accessories

Part Number	Description
98R112SE00E*	Rear Panel kit of Full-Height x3 slots for SE SKU
98R112SA00E*	Rear Panel kit of Full-Height x3 slots for SA SKU
9891821221E	PCIe x16 Riser card for 4-port NVMe drives
1700025064-01	Internal SAS cable (12G) SFF8643 to SFF8643, 60cm
ASR-1000K-00A1E	JBOD module

Note: an additional ASMB riser card is required.

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 [obchod@autocont-ipc.cz](mailto:obchod@autocont-ipc.cz)

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.