

# PPC-3151

## 15" Fanless Panel PC with Intel® Core™ i5-6300U Processor



### Features

- 15" XGA TFT LCD flat panel with projected capacitive (default) or resistive (optional) touchscreen
- Intel® Core™ i5-6300U (default)/i7/i3 (optional) processor with fanless system design
- Supports either 1 x PCIe x4 or PCI
- 1 x M.2 bay (2242) for storage only
- 1 x isolated RS-422/485 with auto flow
- Wide power input range (9 ~ 32 V<sub>DC</sub>)
- Dual Gigabit Ethernet, IEEE1588 compliant
- 3 x Independent displays
- Supports VESA 75 mounting interface

### Introduction


The PPC-3151 is a next-generation panel PC featuring a 15" TFT XGA display with 1024 x 768 resolution. Powered by a high-performance Intel® Core™ i5-6300U processor, the system's high-efficiency fanless thermal design allows heat to dissipate rapidly. By combining high performance with reliability, PPC-3151 provides a superior human-machine interface. Rich I/O including 3 x COM, 4 x USB 3.0, and dual Gigabit Ethernet facilitate device connectivity and system integration. The inclusion of a PCIe/PCI slot for fieldbus or proprietary card expansion increases the system's suitability for diverse applications. Finally, the multi-touch screen ensures convenient and intuitive operation for the optimal user experience.

### Specifications

Model	PPC-3151-650AE	
<b>Processor</b>	CPU	Intel® Core™ i5-6300U (dual core)
	Frequency	2.4 GHz, turbo boost up to 3.0 GHz
	Smart Cache	3 MB
	Memory	1 x SODIMM, DDR4 1866/2133, max. 16 GB (1.2V)
	Storage	1 x 2.5" SATA bay 1 x M.2 bay (size: 22 x 42 mm, socket 2 B key, for storage only)
	Network (LAN)	2 x 10/100/1000 Mbps Ethernet (Intel® I211-AT; Intel® I219LM)
	I/O	3 x Serial ports (2 x RS-232, 1 x RS-422/485 with 1K V <sub>DC</sub> isolation) 4 x USB 3.0 ports at rear 1 x Line-Out, 1 x Mic-In 1 x DB15 VGA 1 x DisplayPort (1.2)
	Expansion	1 x Mini PCIe 1 x PCIe x 4 (Default); 1 x PCI (in the accessory box) Optional: 1 x Cfast, 1 x CF card, 1 x internal USB dongle, 2 x RS-232 or 1 x RS-232 + 1 x GPIO
	Watchdog Timer	255 timer levels, setup via software
	Speaker	2 x 1W
<b>Physical Characteristics</b>	Dimensions	391.4 x 312.5 x 55.35 mm (15.41 x 12.3 x 2.18 in)
	Weight	5.4 kg (11.90 lb)
	OS Support	OS
<b>Power Consumption</b>	Input Voltage	9 ~ 32 V <sub>DC</sub>
	Power Consumption	i5-6300U: 60W (Burn-in test 7.0 in Windows 7, 64 bit)
<b>LCD Panel</b>	Display Type	15" TFT LED panel
	Max. Resolution	1024 x 768
	Viewing Angle	88° (left), 88° (right), 88° (up), 88° (down)
	Luminance (cd/m <sup>2</sup> )	500
	Contrast Ratio	2,500
	Backlight Lifetime	70,000 hr
<b>Touchscreen</b>	Touch Type	Projected capacitive 10-point multi-touch
	Light Transmission	85% ± 3%
	Controller	USB interface
<b>Environment</b>	Operating Temperature	0 ~ 50 °C (32 ~ 122 °F) for SSD, 0 ~ 45 °C (32 ~ 113 °F) for HDD
	Storage Temperature	-40 ~ 60 °C (-40 ~ 140 °F)
	Relative Humidity	10 ~ 95% @ 40 °C (non-condensing)
	Shock	Operating 10 G peak acceleration (11 ms duration), IEC 60068-2-27 compliant
	Vibration	Operating random vibration test 5 ~ 500Hz, 1 Grms with HDD; 2 Grms with SSD, IEC 60068-2-64 compliant
	EMC	CE, FCC Class B, BSMI
	Safety	CB, UL, CCC, BSMI
	Front Panel Protection	IP65 compliant

## Dimensions

Unit: mm

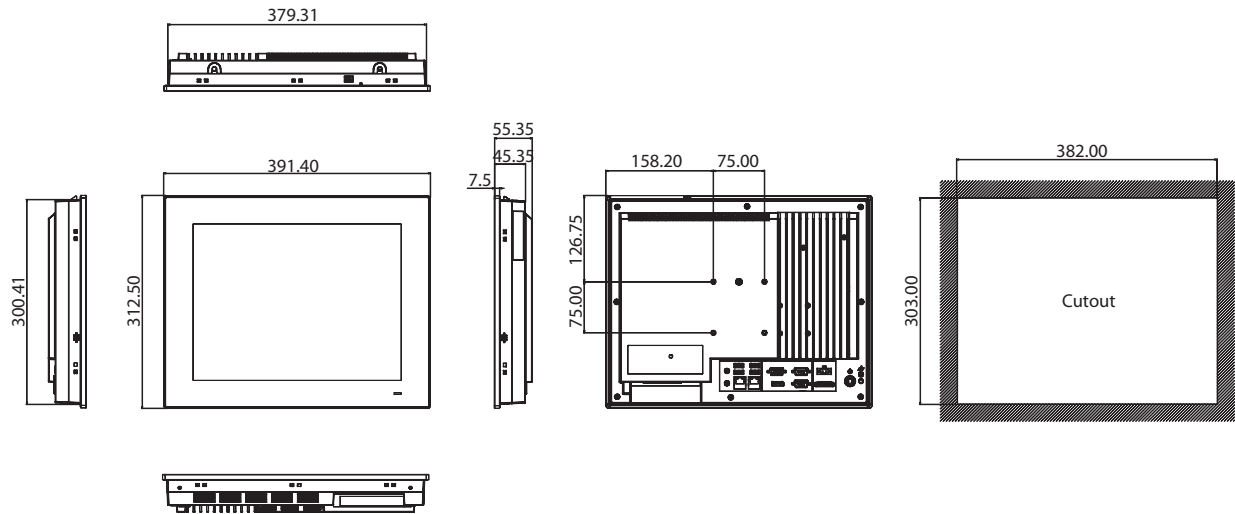


Panel Cutout Dimensions: 382 x 303 mm (15.03 x 11.92 in)

## Ordering Information

Part Number	Description
PPC-3151-650AE	15" Fanless panel PC with PCT multi-touch, Intel Core i5-6300U processor, assembled in China
PPC-3151-650AO	15" Fanless panel PC with PCT multi-touch, Intel Core i5-6300U processor, without audio function, assembled in China
PPC-3151-650AU	15" Fanless panel PC with PCT multi-touch, Intel Core i5-6300U processor, assembled in Taiwan
96PSA-A90W190T-3	A/D 100-240V 90W 19V C6 TERMINAL 2 PIN 62368
1700001524	Power cable 3P UL 10A 125V, 180 cm
170203183C	Power cable 3P Europe (WS-010+083) 183 cm
1700008921	Power cable 3P/3P power supply 1.8M PSE
96CB-POWER-B-1.8MB	Power code 3P CCC(China) 1.8M
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-STAND-A1E	Stand for PPC series
PPC-ARM-A03	ARM VESA standard (A-CLEVER) for PPC series
PPC-WLAN-C1E	M.2 Wi-Fi Module with Antenna cable support 2T2R
PPC-3150-COME	Module that supports two additional ports (either two RS-232 or one RS-232 and one GPIO port) for PPC-3150/PPC-3170
98R3C31500E	PPC-315/317/319 internal USB dongle kits
98R3C31510E	PPC-3150/3170 install CF card kits
98R3C31520E	PPC-3150/PPC-3170 CFast card kits
98R3P321110	TPM 2.0 module

## I/O View

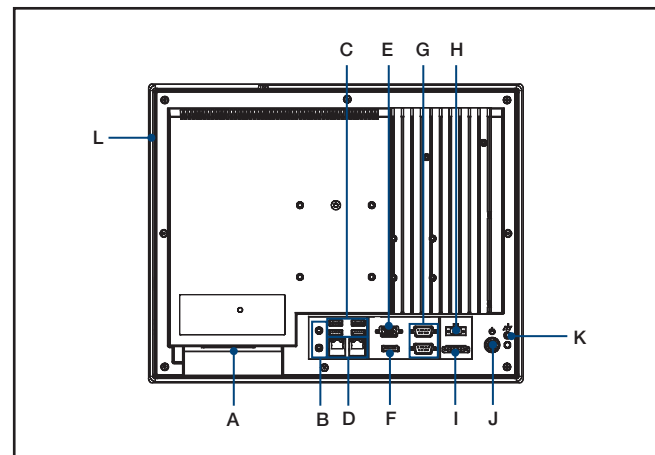

- A. PCIe x 4/PCI expansion
- B. Line-Out/Mic-In
- C. 4 x USB 3.0
- D. 2 x GigaLAN
- E. VGA
- F. DP
- G. 2 x RS232
- H. DC power input
- I. 1 x RS422/485
- J. Power button
- K. Grounding screw
- L. Optional modules

Please note: If some optional modules are offered with the system, additional system certificates may be required in certain regions/countries. Please contact Advantech for certificate compliance.

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 [obchod@autocont-ipc.cz](mailto:obchod@autocont-ipc.cz)

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.