

# SOM-2532

## Intel Atom® x6000, Pentium® and Celeron® x6000 Series Processor SMARC Module

NEW



### Features

- Intel Atom® x6000, Pentium® and Celeron® x6000 Series processor
- SMARC2.1.1 pinout, small size
- Dual-CH LPDDR4 3200MT/s up to 16GB, support IB ECC
- Triple displays up to 4K2K (DP++, HDMI, LVDS/eDP/MIPI-DSI)
- Multiple I/O expansion: PCIe gen3, USB3.2 Gen2, USB2.0, SATA
- On board eMMC 32GB
- Supports iManager, Embedded Software APIs and Wise-DeviceOn




Windows Embedded
 iManager
 WISE-DeviceOn
 CE
 FC

### Specifications

Form Factor	Form Factor	SMARC2.1.1					
	PCB Size	82 mm x 50 mm					
Processor System	CPU	Atom® X6425E	Atom® X6425RE	Atom® x6211E	Atom® x6413E	Pentium® N6415	
	Base Frequency	2.0 GHz	1.9 GHz	1.3 GHz	1.5 GHz	1.2 GHz	
	Burst Frequency	3.0 GHz	N/A	3.0 GHz	3.0 GHz	3.0 GHz	
	Cores	4	4	2	4	4	
	Cache	1.5MB L2 Cache	1.5MB L2 Cache	1.5MB L2 Cache	1.5MB L2 Cache	1.5MB L2 Cache	
	CPU TDP	12W	12W	6W	9W	6.5W	
	IB ECC	Yes	Yes	Yes	Yes	N/A	
	BIOS	AMI UEFI 256Mbit					
Memory	Technology	LPDDR4	LPDDR4	LPDDR4	LPDDR4	LPDDR4	
	Speed	3200MT/s, Up to 4267MT/s by Specific SPU SKUs					
	ECC support	IB ECC supported by Specific CPU SKUs					
	Max. Capacity	Max. 16GB					
	Channel / Socket	Dual channel / Memory down					
Graphics	Controller	Intel® UHD Graphics					
	Max. Frequency	500 MHz	400 MHz	350 MHz	500 MHz	350 MHz	
	Graphic Memory	750 MHz	N/A	750 MHz	750 MHz	800 MHz	
	3D/HW Acceleration	OpenGL® 4.5, DirectX® 12, OpenCL™ 1.2, Vulkan 1.1					
Display	LCD (LVDS/eDP/MIPI-DSI)	1 Port LVDS: 1920 x 1200 @ 60Hz/eDP: 4096 x 2160 @ 60Hz (Optional: MIPI-DSI, only support under Windows)					
	DP++	1 Port (up to 4096 x 2160 @ 60 Hz)					
	HDMI	1 Port HDMI 1.4b: Up to 3840 x 2160 @ 30 Hz, DP 1.2: Up to 4096 x 2160 @ 60 Hz (Optional)					
	Multiple Display	Triple Simultaneous Independent Display					
Expansion	PCI Express x1 (Gen3)	4 PCIe x1 (PCIe2 colay SERDES 1, PCIe3 colay SERDES 0 by BOM option)					
	Audio Interface	Intel HD Audio/ up to 2 I2S					
	eSPI	eSPI					
Serial Bus	SMBus	N/A					
	I2C Bus	Yes					
Ethernet	Gigabit	2 Ports Marvell 88E1512 (10/100/1000BASE-T), Support TSN by Specific CPU SKUs					
	SATA3.0	1 Port (6 Gbps)					
I/O	USB3.2 (Gen2)	2 Ports (10 Gbps)					
	USB2.0	6 Ports (480 Mbps)					
	SPI Bus	Yes. For BIOS EEPROM and TPM					
	Onboard Storage	eMMC 32GB					
	GPIO	14-bit					
	Watchdog	65536 level, 0 – 65535 sec					
	COM Port	4 Ports (2 Ports 4-wire / 2 Ports 2-wire)					
	TPM	Yes					
	CAN-FD	2 Ports (Only by Linux)					
	Smart Fan	N/A					
	Power	Type	ATX/ATX: Vin				
		Supply Voltage	Vin: 4.75-5.25V, RTC Battery: 2.0V ~ 3.3V				
		Power Consumption (Max.)	24.107 W (PTU turbo CPU + GPU100%)				
Power Consumption (Idle)		15.723 W (Burn-in)					
Environment	Operating Temperature	Standard: 0 ~ 60 °C (32 ~ 140 °F) Extend: -40 ~ 85 °C (-40 ~ 185 °F)					
	Storage Temperature	-40 ~ 85 °C (-40 ~ 185 °F)					
	Humidity	Operating: 40 °C @ 95% relative humidity, non-condensing Storage: 60 °C @ 95% relative humidity, non-condensing					
	Vibration Resistance	3.5 Grms					
	Mechanical	Dimensions	82 mm x 50 mm				

# Block Diagram

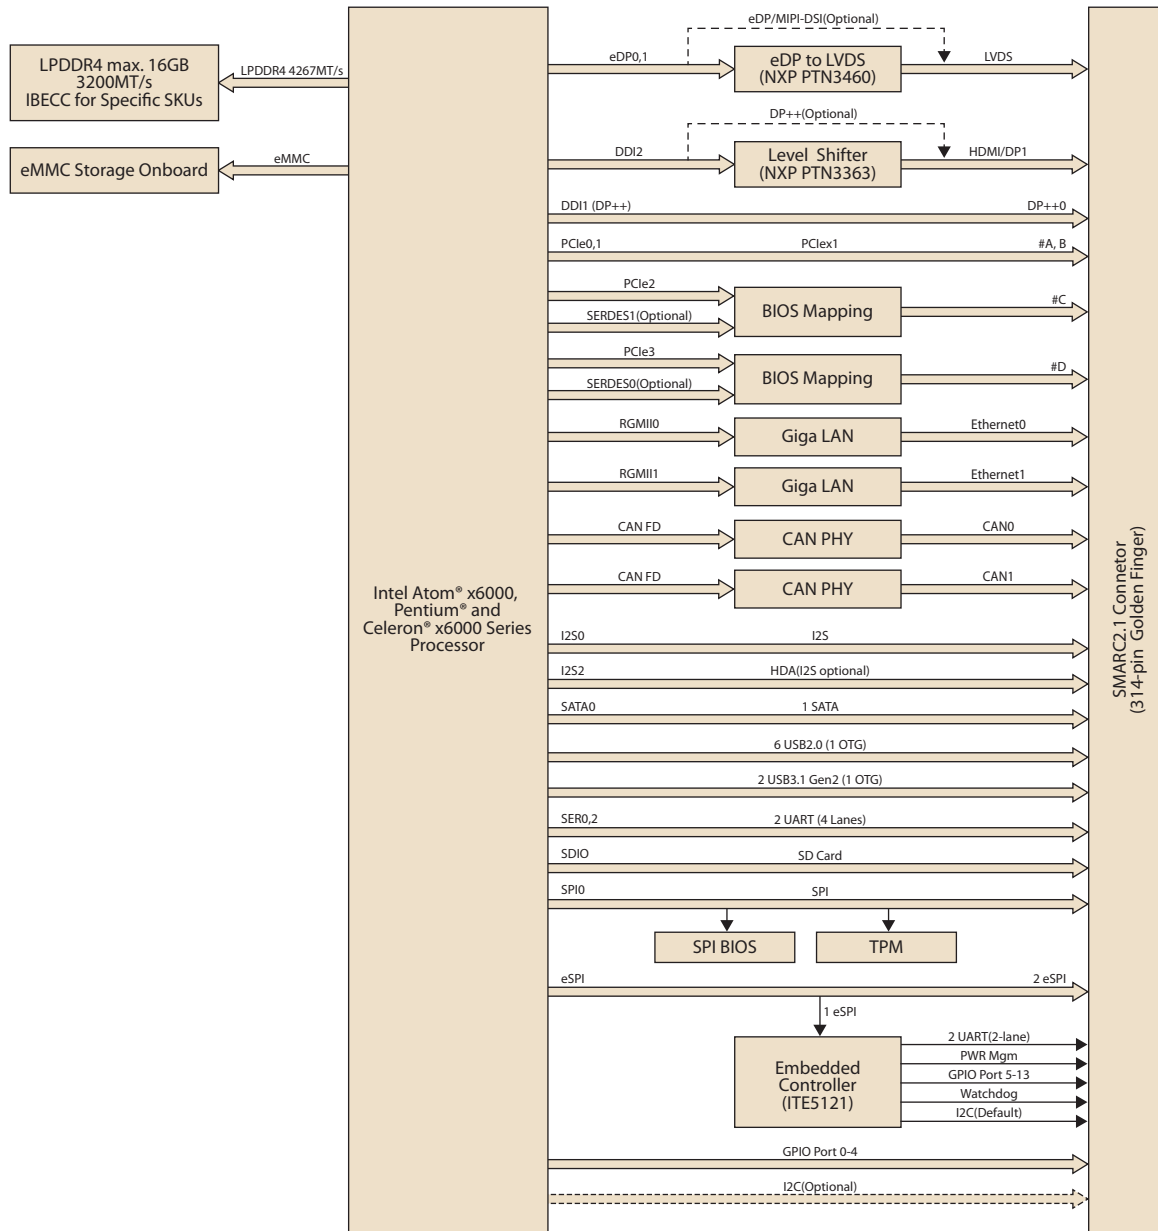

## Ordering Information

Part No.	CPU	Core	Graphics	Base Freq.	Max. Boost Freq.	GFX HFM	GFX Burst Mode	CPU TDP	Onboard Memory	EMMC	IBECC	Thermal solution	Operating Temp.
SOM-2532CCBC-S9A1	Atom® x6425RE	4	32EU	1.9GHz	N/A	400MHz	N/A	12W	8GB	32GB	Yes	Passive	0 ~ 60 °C
SOM-2532DCBC-U0A1	Atom® x6425E	4	32EU	2.0GHz	3.0GHz	500MHz	750MHz	12W	16GB	N/A	Yes	Passive	0 ~ 60 °C
SOM-2532CCBC-U0A1	Atom® x6425E	4	32EU	2.0GHz	3.0GHz	500MHz	750MHz	12W	8GB	32GB	Yes	Passive	0 ~ 60 °C
SOM-2532CCBC-S5A1	Atom® x6413E	4	16EU	1.5GHz	3.0GHz	500MHz	750MHz	9W	8GB	32GB	Yes	Passive	0 ~ 60 °C
SOM-2532CCBC-S3A1	Atom® X6211E	2	16EU	1.3GHz	3.0GHz	350MHz	750MHz	6W	8GB	32GB	Yes	Passive	0 ~ 60 °C
SOM-2532CNBC-S2A1	Pentium® N6415	4	16EU	1.2GHz	3.0GHz	350MHz	800MHz	6.5W	8GB	32GB	No	Passive	0 ~ 60 °C
SOM-2532CCBX-S9A1	Atom® x6425RE	4	32EU	1.9GHz	N/A	400MHz	N/A	12W	8GB	32GB	Yes	Passive	-40 ~ 85 °C
SOM-2532DCBX-U0A1	Atom® x6425E	4	32EU	2.0GHz	3.0GHz	500MHz	750MHz	12W	16GB	32GB	Yes	Passive	-40 ~ 85 °C
SOM-2532CCBX-S5A1	Atom® x6413E	4	16EU	1.5GHz	3.0GHz	500MHz	750MHz	9W	8GB	32GB	Yes	Passive	-40 ~ 85 °C
SOM-2532CCBX-S3A1	Atom® X6211E	2	16EU	1.3GHz	3.0GHz	350MHz	750MHz	6W	8GB	32GB	Yes	Passive	-40 ~ 85 °C

\*Any other SKUs or combination is project based support. Please contact sales for details.

## Development Board

Part No.	Description
SOM-DB2500-00A1	SMARC Development Board, SMARC2.0 & 2.1 compliance

## Optional Accessories

Part No.	Description
1970005111T001	Semi-Heatsink

## Packing List

Part No.	Description	Quantity
-	SOM-2532 COM module	1
1970005009N001/ 1970005010N001	Heatspreader IHS/Heatspreader NON-I	1


## Embedded OS

OS	Part No.	Description
Win10 (HL)	20706WX9HS0137	Img W10 19HL SOM-2532 64b 1809 ENU
Win10 (VL)	20706WX9VS0141	Img W10 19VL SOM-2532 64b 1809 ENU
Win10 (EL)	20706WX9ES0151	Img W10 19EL SOM-2532 64b 1809 ENU

# Reliable Embedded BIOS Solutions

Custom BIOS services with long-term support

Advantech's high-quality embedded BIOS solutions deliver rapid execution and feature expert BIOS team support. These solutions feature multi-functional designs that ensure security and enable power/boot management. Advantech further provides 10+ years of BIOS version management, internal management, and longevity support for both hardware and BIOS — enhancing application efficiency, diversifying functionality, and optimizing performance.

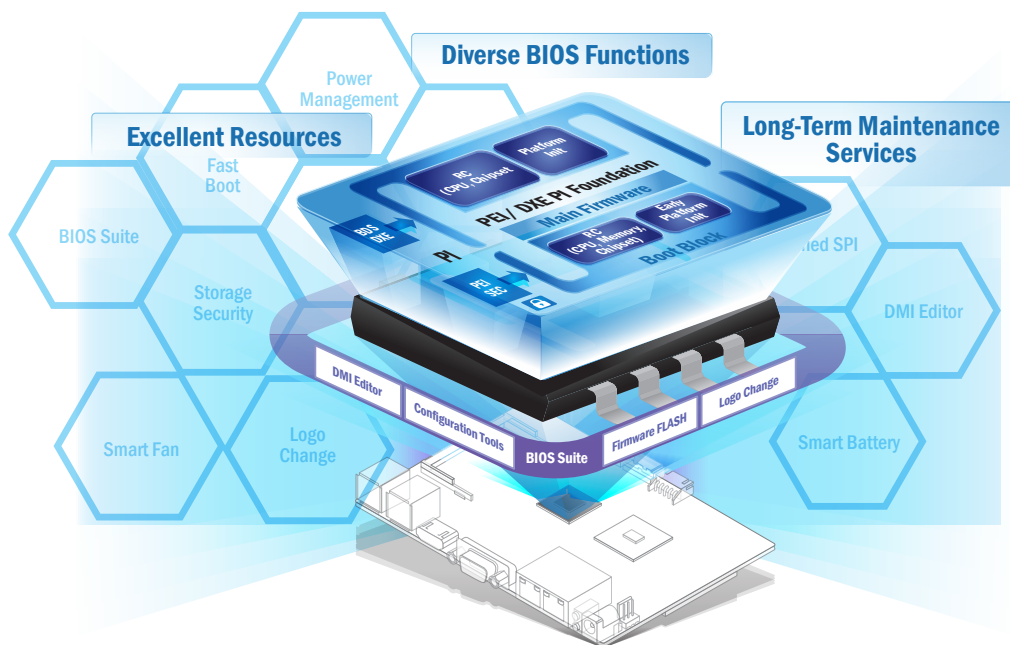

## Embedded BIOS Solution Advantages

### Sufficient Sources

- Strong partnership with BIOS vendors
- 50+ engineers with extensive industrial BIOS experience


### Diverse BIOS Functions

- Multi-layer security
- 3 second fast boot
- Power management
- BIOS suite utility

### Long-Term Maintenance Services

- Platform longevity support
- 10-year BIOS version control
- BIOS remote backup

## Value-Added Customization Process

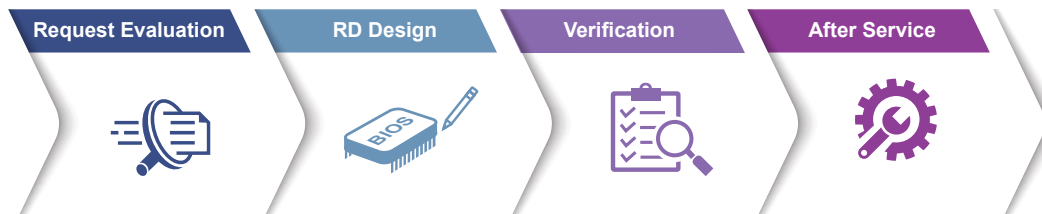

# WISE-DeviceOn

## Massive IoT Device Management Utility

IoT deployment and management typically involves numerous disparate devices installed on multiple sites. These devices require effective monitoring, managing, and tracking. Advantech's easy-to-use WISE-DeviceOn interface enables users to remotely monitor device health, troubleshoot problems, and send software/firmware updates over-the-air (OTA). In sum, DeviceOn empowers quick real-time responsiveness to emerging problems.



### Features

Comprehensive Management	Remote Access	Efficient Operations
<ul style="list-style-type: none"> <li>• Devices status</li> <li>• Peripherals/firmware</li> <li>• Open for extension</li> </ul>	<ul style="list-style-type: none"> <li>• Real-time monitoring</li> <li>• Remote controls</li> <li>• Troubleshooting</li> </ul>	<ul style="list-style-type: none"> <li>• Zero-touch on-boarding</li> <li>• OTA updates</li> <li>• Batch control</li> </ul>

### Product Highlights



**SOM-6883**

High-performance 11<sup>th</sup> Gen Intel® COMe Type 6 Module



**MIO-5375**

Compact 11<sup>th</sup> Gen Intel® Outdoor Focused 3.5" SBC



**EPC-B5587**

10<sup>th</sup> Gen Intel® Xeon® based Edge server



**EPC-R3220**

Arm based IoT Edge Gateway

# Edge AI Suite

AI development for diverse application at the Edge

Increasing demand for AI inference/analytic capabilities at the Edge make AI training models, software development environments, and hardware configuration key factors in successful solution deployment. Advantech's Edge AI Suite helps users build AI demo devices quickly and choose optimal hardware solutions easily.



5x Performance Boost	All-in-one Installation	One Click AI Experience	Plug-and-play Environment	Discover Cost-effective Hardware
<ul style="list-style-type: none"> <li>Integrated Intel® OpenVINO™ technology</li> <li>Boost AI using Advantech hardware</li> </ul>	<ul style="list-style-type: none"> <li>Build AI environment in under 5 minutes</li> <li>Ready-to-use configuration</li> </ul>	<ul style="list-style-type: none"> <li>User friendly configuration guidance</li> <li>One-click Benchmark acquisition</li> </ul>	<ul style="list-style-type: none"> <li>Easy access to 100+ AI inference extensions</li> <li>Software development package available</li> </ul>	<ul style="list-style-type: none"> <li>Diverse CPU/RAM options</li> <li>Find hardware solutions for AI development</li> </ul>



# Embedded Linux Support and Design-in Services

## Hardware Certified Ubuntu and Yocto with Eco Partner Services

Linux is the most popular embedded OS for transportation, outdoor services, factory automation, and mission critical applications. Its open source and kernel reliability features ease security updates, and make it particularly adaptable to new AI and Edge computing technology. Advantech has cooperated with Canonical and other software partners to provide hardware certified Ubuntu image and Yocto BSP as Linux offerings. The Advantech, Embedded Linux, and Android Alliance (ELAA) delivers local software services and consultation.



### Features

Certified OS and BSP	Licensed Services	Numerous AI and Edge Resources	Local Partner Alliance
<ul style="list-style-type: none"> <li>Platform compatibility tests</li> <li>Preloaded functional driver and software stacks</li> </ul>	<ul style="list-style-type: none"> <li>License authorized Canonical delivers 10-years of bug fixes and security updates</li> <li>In-house bundled service</li> </ul>	<ul style="list-style-type: none"> <li>Containerized technology for service provision and deployment</li> <li>AI resources from Caffe, TensorFlow, and mxnet</li> </ul>	<ul style="list-style-type: none"> <li>Embedded Linux and Android Alliance (ELAA)</li> </ul>

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.