

# ADAM-4115


# ADAM-4015

# ADAM-4024


Robust 6-Ch RTD Input Module

6-ch RTD Module with Modbus


4-ch Analog Output Module with Modbus

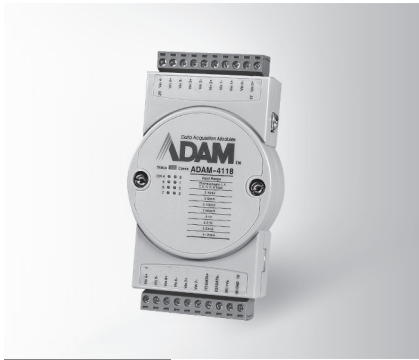

ADAM-4115

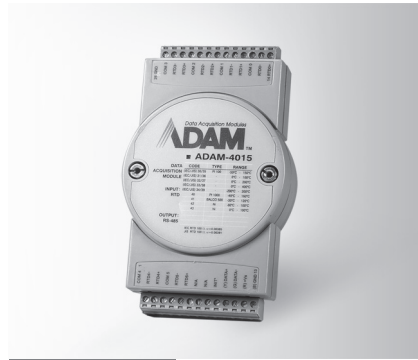

ADAM-4015

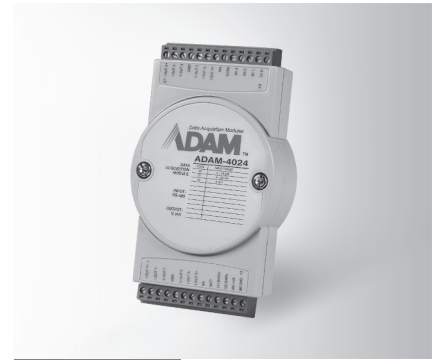

ADAM-4024



## Specifications

### General

- **Certification** CE, FCC
- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Power Consumption** 1.2 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 second)
- **Supported Protocols** ASCII command and Modbus/RTU
- **Interface** RS-485, Micro USB

### RTD Input

- **Channels** 6 differential
- **Input Connections** 2, 3-wire
- **Sampling Rate** 10/100 Hz total channels (selected by utility)
- **Input Type** Pt, Balco and Ni RTD
- **RTD Types and Temperature Ranges**
  - Pt 100 RTD:**
    - Pt -50°C to 150°C
    - Pt 0°C to 100°C
    - Pt 0°C to 200°C
    - Pt 0°C to 400°C
    - Pt -200°C to 200°C
  - Pt 1000 RTD**
    - Pt -40°C to 160°C
  - Balco 500 RTD**
    - 30°C to 120°C
  - Ni 50 RTD**
    - Ni -80°C to 100°C
  - Ni 508 RTD**
    - Ni 0°C to 100°C
- **Accuracy** ±0.1%
- **Span Drift** ± 25 ppm/°C
- **Zero Drift** ±6 μV/°C

## Specifications

### General

- **Certification** CE, FCC, UL, UL Class I Division 2
- **Connectors** 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- **Power Consumption** 1.2 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 s) & Communication
- **Supported Protocols** ASCII command and Modbus/RTU
- **Burnout Detection** Yes

### Analog Input

- **Channels** 6 differential
- **Input Connections** 2, 3-wire
- **Input Impedance** 10 MΩ
- **Input Type** Pt, Balco and Ni RTD
- **RTD Types and Temperature Ranges**
  - Pt 100 RTD:**
    - Pt -50°C to 150°C
    - Pt 0°C to 100°C
    - Pt 0°C to 200°C
    - Pt 0°C to 400°C
    - Pt -200°C to 200°C
  - IEC RTD 100 ohms (α = 0.00385)
  - JIS RTD 100 ohms (α = 0.00392)
  - Pt 1000 RTD**
    - Pt -40°C to 160°C
  - Balco 500 RTD**
    - 30°C to 120°C
  - Ni 50 RTD**
    - Ni -80°C to 100°C
  - Ni 508 RTD**
    - Ni 0°C to 100°C
  - BA1**
    - 200°C to 600°C
- **Accuracy** ±0.1% (Typical)
- **CMR @ 50/60 Hz** 120 dB
- **Span Drift** ± 25 ppm/°C
- **Zero Drift** ± 3 μV/°C

## Specifications

### General

- **Certification** CE, FCC, UL, UL Class I Division 2
- **Connectors** 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- **Power Consumption** 3 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 second) & Communication
- **Supported Protocols** ASCII command and Modbus/RTU

### Analog Output

- **Channels** 4
- **Output Impedance** 0.5 Ω
- **Output Range** 0 ~ 20 mA, 4 ~ 20 mA, ±10 V
- **Output Type** mA, V (Differential)
- **Accuracy** ±0.1 % of FSR for current output  
±0.1 % of FSR for voltage output
- **Current Load Resistor** Max. 500 Ω (source)
- **Voltage Load Resistor** Min. 1K Ω
- **Resolution** 12-bit
- **Isolation Voltage** 3,000 V<sub>DC</sub>
- **Programmable Output Slope** 0.0625 ~ 64.0 V/sec.
- **Span Temperature Coefficient** ±25 ppm/°C
- **Zero Drift** Voltage output: ±30 μV/°C  
Current output: ±0.2 μA/°C

### Digital Input

- **Channels** 4
- **Input Level** Logic level 0: 1 V max.  
Logic level 1: 10 ~ 30 V<sub>DC</sub>
- **Isolation Voltage** 3,000 V<sub>DC</sub>

## Common Specifications

### General

- **Power Input** Unregulated 10 ~ 30 V<sub>DC</sub>  
ADAM-4115: 10 ~ 48 V<sub>DC</sub>

### Environment

- **Operating Humidity** 5 ~ 95% RH

- **Operating Temperature** -10 ~ 70°C (14 ~ 185°F)  
ADAM-4115: -40 ~ 85°C (-40 ~ 185°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)  
ADAM-4115: -40 ~ 85°C (-40 ~ 185°F)

## Ordering Information

- **ADAM-4115** Robust 6-Ch RTD Input Module
- **ADAM-4015** 6-ch RTD Module with Modbus
- **ADAM-4024** 4-ch Analog Output Module with Modbus

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 [obchod@autocont-ipc.cz](mailto:obchod@autocont-ipc.cz)

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.