


ADAM-4510I ADAM-4520I ADAM-4117

Robust RS-422/485 Repeater

Robust RS-232 to RS-422/485 Converter Robust 8-ch Analog Input Module with Modbus

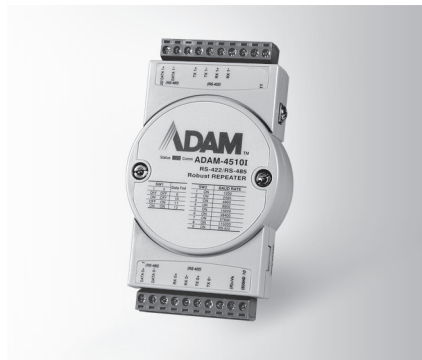

ADAM-4510I



ADAM-4520I



ADAM-4117



Specifications

General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Power Consumption** 1.4 W @ 24 V_{DC}
- **Certification** FCC, CE, UL, UL C1D2

Communications

- **Input** RS-485 (2-wire) or RS-422 (4-wire)
- **Output** RS-485 (2-wire) or RS-422 (4-wire)
- **Speed Modes (bps)** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k, RTS control and RS-422 (switchable)
- **Supports Auto Baud-Rate**
- **Provide RS-485 to RS-422 Convert Ability**

Specifications

General

- **Connectors** 1 x plug-in terminal block (#14 ~ 22 AWG) (RS-422/485)
1 x DB9-F (RS-232)
- **Power Consumption** 1.2 W @ 24 V_{DC}
- **Certification** FCC, CE, UL, UL C1D2

Communications

- **Input** RS-232 (DB9)
- **Output** RS-485 (2-wire) or RS-422 (4-wire)
- **Speed Modes (bps)** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k, RTS control and RS-422 (switchable)
- **Supports Auto Baud-Rate**

Specifications

General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Watchdog Timer** System (1.6 second) & Communication
- **Supported Protocols** ASCII Command and Modbus/RTU
- **Power Consumption** 1.2 W @ 24 V_{DC}
- **Interface (B version)** RS-485, micro USB
- **Certification** FCC, CE

Analog Input

- **Channels** 8 differential and independent configuration channels
- **Input Impedance** 20 M Ω
- **Input Type** mV, V, mA
- **Input Range** 0 ~ 150mV, 0 ~ 500mV, 0 ~ 1V, 0 ~ 5V, 0 ~ 10V, 0 ~ 15V, \pm 150 mV, \pm 500 mV, \pm 1V, \pm 5 V, \pm 10 V, \pm 15V, \pm 20 mA, 0 ~ 20 mA, 4 ~ 20mA
- **Accuracy** Voltage mode : \pm 0.1% or better
Current mode : \pm 0.2% or better
- **Resolution** 16-bit
- **Sampling Rate** 10/100 samples/sec (selected by utility)
- **CMR @ 50/60 Hz** 92 dB
- **Over Voltage Protection** \pm 60 V_{DC}
- **High Common Mode** 200 V_{DC}
- **Span Drift** \pm 25 ppm/ $^{\circ}$ C (Typical)
- **Zero Drift** \pm 6 μ V/ $^{\circ}$ C
- **Built-in TVS/ESD Protection**

Common Specifications

General

- **Power Input** Unregulated 10 ~ 48 V_{DC} w/power reversal protection
- **Isolation Voltage** 3,000 V_{DC}

Environment

- **Operating Humidity** 5 ~ 95% RH
- **Operating Temperature** - 40 ~ 85 $^{\circ}$ C (-40 ~ 185 $^{\circ}$ F)
- **Storage Temperature** - 40 ~ 85 $^{\circ}$ C (-40 ~ 185 $^{\circ}$ F)
- **Supports Noise Rejection**

Ordering Information

- **ADAM-4510I-AE** Robust RS-422/485 Repeater
- **ADAM-4520I-AE** Robust RS-232 to RS-422/485 Converter
- **ADAM-4117-C** Robust 8-ch Analog Input Module with Modbus

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.