

ADAM-4118

ADAM-4150

ADAM-4168


Robust 8-ch Thermocouple Input Module with Modbus

Robust 15-ch Digital I/O Module with Modbus


Robust 8-ch Relay Output Module with Modbus



ADAM-4118

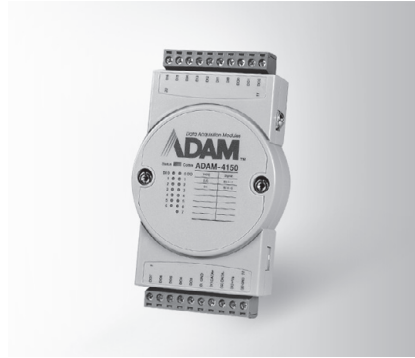

ADAM-4150

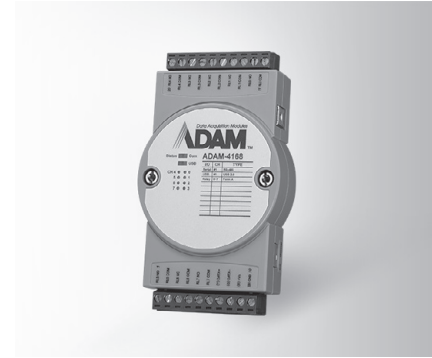

ADAM-4168



Specifications

General

- **Certification** FCC, CE
- **Power Consumption** 0.5W @ 24 V_{DC}

Analog Input

- **Channels** 8 differential and independent configuration channels
- **Input Impedance** 20 M Ω
- **Input Type** T/C, mV, V, mA
- **Input Range** Thermocouple

J	0 ~ 760°C	R	500 ~ 1,750°C
K	0 ~ 1,370°C	S	500 ~ 1,750°C
T	-100 ~ 400°C	B	500 ~ 1,800°C
E	0 ~ 1,000°C	N	-200 ~ 1300°C

- Voltage mode 0~15 mV, 0~50 mV, 0~100 mV, 0~500 mV, 0~1 V, 0~2.5 V, ± 15 mV, ± 50 mV, ± 100 mV, ± 500 mV, ± 1 V, ± 2.5 V
- Current mode 0~20mA, ± 20 mA, 4~20 mA

- **Accuracy** Voltage mode: $\pm 0.1\%$ or better
Current mode: $\pm 0.2\%$ or better
- **Resolution** 16-bit
- **Sampling Rate** 10/100 samples/sec (selected by Utility)
- **CMR @ 50/60 Hz** 92 dB
- **Overvoltage Protection** ± 60 V_{DC}
- **High Common Mode** 200 V_{DC}
- **Span Drift** ± 25 ppm/°C (Typical)
- **Zero Drift** $\pm 6\mu$ V/°C
- **Built-in TVS/ESD Protection**
- **Burnout Detection**

Specifications

General

- **Certification** FCC, CE
- **Power Consumption** 1.6 W @ 24 V_{DC}

Digital Input

- **Channels** 7
- **Input Level** Dry contact: Logic level 0: Close to GND
Logic level 1: Open
Wet contact: Logic level 0: 3 V max
Logic level 1: 10 ~ 30 V

(Note: The Digital Input Level 0 and 1 status can be inverted)

- **Supports 3 kHz Counter Input (32-bit + 1-bit overflow)**
- **Supports 3 kHz Frequency Input**
- **Supports Invert DI Status**
- **Over Voltage Protection** 40 V_{DC}

Digital Output

- **Channels** 8, open collector to 40 V (0.1A max. per channel)
- **Power Dissipation** 1W load max
- **RON Maximum** 150 m Ω
- **Supports 1 kHz Pulse Output**
- **Supports High-to-Low Delay Output**
- **Supports Low-to-High Delay Output**

Specifications

General

- **Certification** FCC, CE
- **Power Consumption** 2.3 W @ 24 V_{DC}

Relay Output

- **Output Channels** 8 Form A
- **Contact Rating (Resistive)** 0.5 A @ 120 V_{AC}
0.25 A @ 240 V_{AC}
1 A @ 30 V_{DC}
0.3 A @ 110 V_{DC}
- **Breakdown Voltage** 750 V_{AC} (50/60 Hz)
- **Initial Insulation Resistance** 1 G Ω min. @ 500 V_{DC}
- **Relay Response Time (Typical)** On: 4ms
Off: 4ms
- **Total Switching Time (Typical)** 10 ms
- **Supports 100 Hz pulse output**
- **Maximum Operating Speed** 50 operations/min (at related load)

Common Specifications

General

- **Power Input** Unregulated 10 ~ 48 V_{DC}
- **Watchdog Timer** System (1.6 second) & Communication
- **Connector** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Isolation Voltage** 3,000 V_{DC}
- **Interface (B version)** RS-485, micro USB

- **Supported Protocols** ASCII Command and Modbus/RTU

Environment

- **Operating Humidity** 5 ~ 95% RH
- **Operating Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)

Ordering Information

- **ADAM-4118-C** Robust 8-ch Thermocouple Input Module w/ Modbus
- **ADAM-4150-C** Robust 15-ch Digital I/O Module with Modbus
- **ADAM-4168-C** Robust 8-ch Relay Output Module with Modbus

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.