

# ARK-10 A4

## Intel® Celeron Quad Core J1900 Quad Core SoC with Dual GbE and Dual COM Fanless Box PC



### Features

- Intel® Celeron J1900 Quad Core 2.0 GHz SoC
- 2G DDR3L Memory & 500G 2.5" 24x7 SATA HDD Built In
- 2 x GbE for Multiple Internet Transmission
- 2 x RS-232/422/485 (BIOS selection)
- 1 x Full-Size MiniPCIe (ex. WLAN or WWAN module) #1
- Optional VESA / DIN Rail / Wall Mounting kits
- Threaded DC jack design
- Supports WISE-PaaS DeviceOn and Embedded Software APIs




### Specifications

		ARK-10-U0A4
Processor System	CPU	Intel® Celeron Processor J1900 Quad Core SoC
	Frequency	2.0 GHz (Up to 2.41 GHz w/ burst frequency enabled)
	L2 Cache	2 MB
	BIOS	AMI EFI 64 Mbit (Default BIOS is supported for 64-bit OS installation, BIOS for 32-bit OS is supported by project)
Memory	Technology	DDR3L 1333 MHz
	Socket	1 x 204-pin SO-DIMM, 2 GB Memory Built In
Graphics	Chipset	Intel® Atom SoC integrated
	Graphic Engine	DirectX* 11.1, OGL 3.0, OCL 1.1, OGL ES 2.0 Encode: H264, MPEG2/4, VC1, WMV9 Decode: H264, MPEG2
	VGA	1 x VGA, support up to 1920 x 1200 at 60Hz
Audio	Main System	ALC-888S, High Definition Audio. Line-out & Line-in
Ethernet	LAN #1	10/100/1000 Mbps Intel I210 GbE, support Wake on LAN
	LAN #2	10/100/1000 Mbps Intel I210 GbE, support Wake on LAN
I/O Interface	Serial Ports	2 x RS-232/422/485 (BIOS selectable)
	USB Interface	2 x USB 2.0 & 1 x USB3.0
Other	Watchdog timer	255-level timer interval, setup by software
Expansion	Mini PCIe	1 x Full-size Mini PCIe, support WLAN or WWAN module #1
Storage	2.5" Drive Bay	1 x 500GB 2.5" 24x7 SATA HDD Built In
	mSATA	1x half-size mSATA (Suggest to assembly by CTOS or T-Part due to complex installation)
Software Support	Microsoft Windows	Windows 10
	Linux	Support (by Project)
Power Requirement	Power Input Voltage	Single 12 V <sub>DC</sub>
	Power Adapter	AC to DC, DC12 V/3 A, 36 W with threaded design
Mechanical	Construction	Aluminum housing
	Mounting	VESA/DIN Rail/Wall Mounting Kits (Optional)
	Dimensions (W x H x D)	133.8 x 43.1 x 94.2 mm (5.27" x 1.7" x 3.71")
Environment	Operating Temperature	0 ~ 50° C with 0.7m/s air flow
	Storage Temperature	-40 ~ 85 °C (-40~185 °F)
	Relative Humidity	95% @ 40 °C (non-condensing)
	Vibration During Operation	0.5Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	Shock During Operation	10G, IEC 60068-2-27, half sine, 11 ms duration
Regulation	EMC	CE/FCC Class A, CCC, BSMI, UKCA
	Safety	UL, CCC, BSMI, CB, UKCA


#1 Mini PCIe is hardware interface for wireless communication integration only. System level RF certification is not available.

## Dimensions


Unit: mm

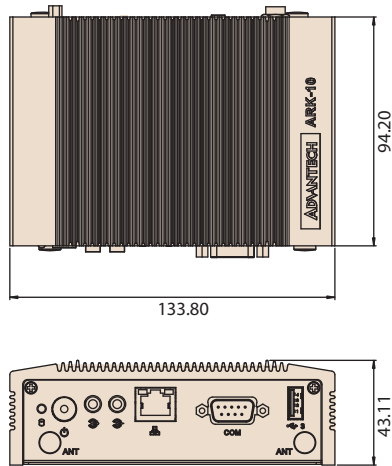


### DIN Rail




### VESA mount




### Wall mount



## Front Panel External I/O Mechanical Layout/Drawing

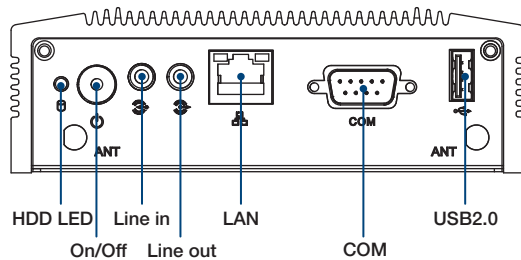

## Rear Panel External I/O Mechanical Layout/Drawing

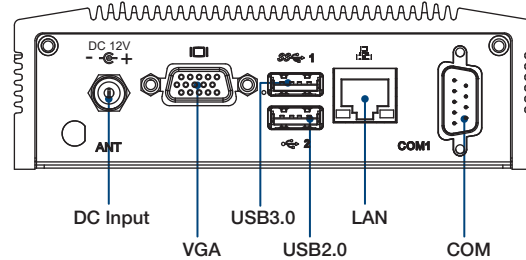

## Ordering Information

Part Number	CPU	RAM	VGA	GbE	USB 2.0	USB 3.0	RS-232/422/485	Audio	MiniPCIe	2.5" HDD bay	mSATA	Operating Temperature
ARK-10-U0A4	Intel Atom J1900 QC	2GB Built In	1	2	2	1	2	Line in Line out	1 Full-size	1 x 500G 2.5" 24x7 HDD Built In	1 (H/S)	0 ~ 50 °C

## Packing List

Part Number	Description
-	1 x ARK-10 Unit
-	1 x User Manual (Simplified Chinese)
96PSA-A36W12W7-5	1 x AC to DC adapter DC 12V/3A 36W

## Embedded OS (Only available for T-Parts OEM, and CTOS service)

Part Number	Description
20706WX9ES0092	Windows 10 IoT Enterprise 2019 LTSC 64bit 1809 ENU

\* Default BIOS is supported for 64-bit OS installation, BIOS for 32-bit OS is supported by project.

## Optional Items

Part Number	Description
1700001524	Power Cable 3-pin 180cm, USA type
170203183C	Power Cable 3-pin 180cm, Europe type
170203180A	Power Cable 3-pin 180cm, UK type
1700008921	Power Cable 3-pin PSE Mark 183cm
AMK-V003E	ARK-112X series VESA mounting kit
AMK-R001E	ARK-112X series DIN-rail mounting kit
AMK-W001E	ARK-112X series Wall mounting kit

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.