

SFP-VDSL Modules

VDSL2 SFP Modules for Long Reach Ethernet



Features

- Supports plug-n-play operation
- Industrial standard small form-factor pluggable (SFP, MSA compliant) package
- Provides 100/100 Mbps up to 400m over CAT 5e
- Configurable SNR profile for noisy environment

Introduction

SFP-VDSL modules are integrated SFP bridge modem, a MSA compliant Small-Form Factor Pluggable module that enables traditional Ethernet switch, media converter and other network appliances to connect beyond typical Ethernet coverage (100 meters). Incorporated with the latest VDSL2 technology, this SFP modem can be easily adapted to existing applications with existing 2-wire cable, such as phone line, to avoid the cost of rewiring. It can drastically extend the Ethernet service on UTP wire with distance up to 3000 meters, and even with the rate of 100Mbps speed up to 400 meters on a standard Cat 5e 2 wire cable.


The SFP modules are also designed with flexible profiles settings for system integrator, or user, to select based on their unique applications and environment requirements. Symmetric profile can be applied as a standard Ethernet connection while Asymmetric profile can be used for other services like Video streaming or IP surveillance services which require high traffic flow in a uni-direction configuration. The SFP modem also supports Telco grade noise cancellation techniques like Interleave, high SNR profile, and retransmission that can effectively eliminate the noise impact to ensure your service/control messages can securely deliver in a harsh environment.

With long reach coverage, high noise immunity, and compact board size, the modules are an ideal upgrade for your Enterprise or Industry applications.

Specifications

Hardware	RJ-45 (LRE Port)	
	SERDES connect to host	
	LED 1 (CO/ CPE indicator)	
	LED 2 (PWR/ Link Status indicator)	
Software	Self Boot & Managed by Internal Flash	
	Linux driver for managed devices	
Power Requirement	3.3v , 700mA	
Environment	Operating Temperature	-20 ~ +75°C (SFP cage itself, system operating temperature of the connected/linked main device depends respectively.)
	Storage Temperature	-40 ~ +85°C
	Operating Humidity	5% to 90%(non-condensed)
	Storage Humidity	5% to 95%(non-condensed)
	ESD Standards	Contact: +/-4KV Air: +/-8KV (EN 61000-4-2)
	Radiated RFI Standards	Strength:10V/m (EN 61000-4-3)
	EFT/BURST Standards	Power:2KV Signal:1KV (EN 61000-4-4)
Surge Immunity Standards	Power:2KV Signal:1KV (EN 61000-4-5)	
Certification	CE / FCC	

Deployment Option

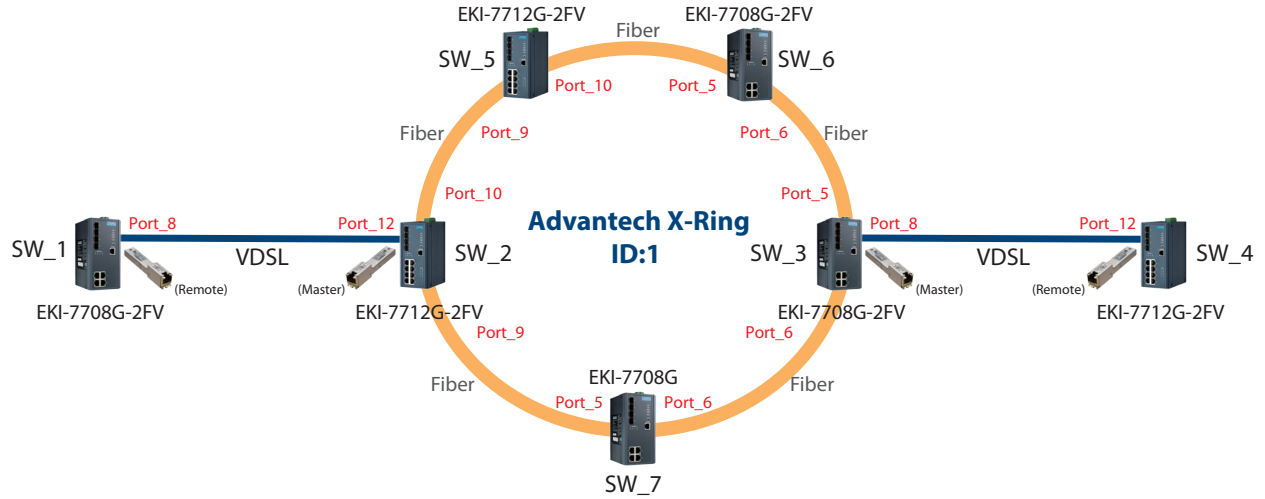

Ordering Information

- **SFP-VDSL** Master & Remote as a set
- **SFP-VDSL-M** Master, CO side (968AD00158)
- **SFP-VDSL-R** Remote, CPE side (96PD-00134)

Note: These SFP-VDSL modules are compatible only with EKI-7708G-2FV/ EKI-77012G-2FV/ IMC-574I-A

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.