

# UNO-2372G

**Intel Atom/Celeron Small-Size Modular Box Platform with 2 GbE, 4 USB, 4 COM, 2 mPCIe, HDMI, DP**

**NEW**



Single-stack ▲

Double-stack ▲



## Features

- Intel® Atom E3845; Celeron® J1900/J3455 quad-core processor with 4G DDR3L memory
- Compact, robust, fanless and cable-free system with high stability
- 2 x GbE, 4 x USB, 4 x RS-232/422/485, 1 x HDMI, 1 x DP
- Modular design with optional second stack for increased functionality
- Stand mount with rubber stopper
- Optional kit for DIN-rail and VESA mounting
- Optional Wi-Fi/Bluetooth/cellular connectivity

## Introduction


Advantech's new generation UNO-2000 series of Embedded Automation Computers are a highly ruggedized fanless and modular design. The incredible modularity of UNO-2372G offers numerous performance and cost-saving advantages, including elimination of unnecessary features and expenses, accelerated production and delivery, rapid deployment and integration, reduced system downtime and maintenance costs, and support for future upgrades and expansion. The UNO-2372G's modular design features optimized I/O and an optional second expansion stack that support Advantech's iDoor technology. This allows the platform functionalities to be easily extended and customized with the integration of various iDoor modules, including industrial Fieldbus, wireless communication, I/O and peripheral module, to provide purpose-built, future-proof solutions that satisfy specific application requirements.

## Specifications


<b>System Hardware</b>	Processor	Intel® Atom Quad Core E3845 1.91GHz	Intel® Celeron® Quad Core J1900, 2GHz	Intel® Celeron® Quad Core J3455 1.5 GHz (max. turbo 2.3 GHz)
	Memory	Built-in 4GB DDR3L 1333MHz (Up to 8GB)		Built-in 4 GB DDR3L, 1866 MHz (Up to 8 GB)
	Graphics Engine	Intel HD Graphics		Intel HD Graphics 500
	Ethernet	Intel® i210/ Realtek i8119i GbE, 802.1Qav, 802.1AS, 802.3az		
	Hardware Security	TPM2.0 (Optional)		
	Storage	1 x mSATA shared with mPCIe socket 1 x 2.5" SATA HDD drive bay (Max. height 9.5 mm)		
	Expansion	2 x Full size mPCIe slots		
	Bios	AMI UEFI (64 Mbit)		
<b>I/O Interfaces</b>	Watchdog Timer	Programmable timer with 255 intervals (1 ~ 255 sec)		
	LED Indicators	Power, RTC battery, LAN (active, status), and HDD		
	Serial Ports	4 x RS-232/422/485, DB9, 50 ~ 115.2kbps		
	LAN Ports	2 x RJ45, 10/100/1000 Mbps IEEE 802.1u 1000BASE-T Fast Ethernet		
	USB Ports	1 x USB 3.0, 3 x USB 2.0		4 x USB 3.0
	Displays	1 x HDMI 1.4 (1920x1080@60Hz) 1 x DP 1.1 (2560x1600@60Hz)		1 x HDMI 1.4b (3840 x 2160 @30 Hz) 1 x DP 1.2 (3840 x 2160 @60 Hz)
<b>General</b>	Power Connector	1 x 2-Pin, Terminal Block		
	Certification	CE, FCC, UL, CCC, BSMI		
	Dimensions (W x D x H)	Single stack: 150 x 105 x 35mm Double Stack: 150 x 105 x 65mm		
	Form Factor	Small Size		
	Enclosure	Aluminum Housing		
	Mounting	Stand, wall, VESA (optional), DIN rail (optional)		
	Weight(Net)	Single-stack model: 0.8 kg (1.8 lb) Double-stack model: 1.0 kg (2.2 lb)		
	Power Requirement	10 ~ 36 V <sub>DC</sub>		
	Power Consumption	30W (Typical), 42W (Max)		18.36W (typical)
	OS support	Microsoft® Windows 7, Windows 10, Advantech Linux (Ubuntu 18.04/20.04)		Microsoft® Windows 10, Advantech Linux (Ubuntu 18.04/20.04)
<b>Environment</b>	Operating Temperature	-20 ~ 60°C (-4 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow		
	Storage Temperature	- 40 ~ 85 °C/-40 ~ 185 °F		
	Relative Humidity	10 ~ 95% RH @ 40°C, non-condensing		
	Shock Protection	Operating, IEC 60068-2-27, 50G, half sine, 11ms		
	Vibration Protection	Operating, IEC 60068-2-64, 2Grms, random, 5 ~ 500Hz, 1hr/axis (mSATA) Operating, IEC 60068-2-64, 0.75Grms, random, 5 ~ 500Hz, 1hr/axis (HDD)		
	Ingress Protection	IP40		

## Installation Scenario

DIN-rail Mount Illustration





VESA Mount Illustration







## Dimensions

Single Stack




Double stack

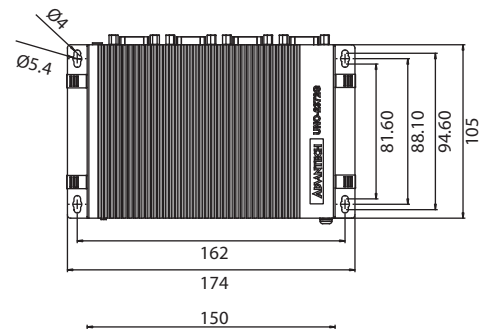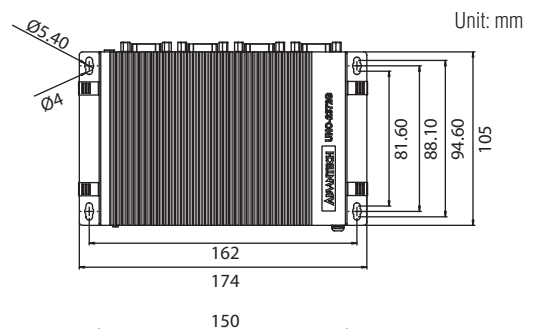


## Front I/O View

Single Stack



Double stack




1. Power Button
2. RJ45 LAN
3. USB
4. HDMI
5. Reserved Antenna


6. BTR, HDD & PWR LED Lights
7. USB
8. DisplayPort
9. Power Connector
10. Chassis Grounding

## Rear I/O View

Single Stack



Double stack



1. RS-232/422/485
2. Line Out

3. iDoor Expansion Slot
4. Rubber Stopper

## Ordering Information

Ordering Part Number	CPU	iDoor	LAN IC	TPM 2.0	Audio	USB	COM	LAN	Manufacturing site
Single Stack	UNO-2372G-E021BE	X	Realtek i8119i	X	Line Out	4	4	2	Taiwan
	UNO-2372G-J021BE								China
	UNO-2372G-J121AE		Intel® i210	Yes					China
	UNO-2372G-J121AU								Taiwan
Double Stack	UNO-2372G-E022BE	2	Realtek i8119i	X	Line Out	4	4	2	Taiwan
	UNO-2372G-J022BE								China
	UNO-2372G-J122AE		Intel® Celeron J3455	Yes					China

**\*Below Part Number had been announced end of life**

Ordering Part Number	CPU	iDoor	LAN IC	TPM 2.0	Audio	USB	COM	LAN	Manufacturing site
Single Stack	UNO-2372G-E021AE	X	Intel® i210	Yes	Line Out	4	4	2	Taiwan
	UNO-2372G-J021AE								China
Double Stack	UNO-2372G-E022AE	2	Intel® i210	Yes	Line Out	4	4	2	Taiwan
	UNO-2372G-J022AE								China

## iDoor Modules

Supported by "Double Stack" models. Applied on "Single stack" models with 2nd stack extension kit as well

- **PCM-24D2R2-BE** 2-port isolated RS-232 mPCIe, DB9
- **PCM-24D2R4-BE** 2-port isolated RS-422/485 mPCIe, DB9
- **PCM-24D4R2-BE** 4-port non-isolated RS-232 mPCIe, DB37
- **PCM-24D4R4-BE** 4-port non-isolated RS-422/485 mPCIe, DB37
- **PCM-27D24DI-AE** 24-channel isolated digital I/O with counter mPCIe, DB37
- **PCM-24R1TP-BE** 1-Port Gigabit Ethernet, Intel® i225, mPCIe, RJ45
- **PCM-24S2WF-CE** WiFi 802.11 ac/a/b/g/n 2T2R w/Bluetooth 4.1
- **PCM-24R2GL-AE** 2-port Gigabit Ethernet, mPCIe, RJ45
- **C-PCM-24S24G-4AV-1** MultiTECH iDOOR, LTE Cat 4 (AT&T/Verizon), antenna

Please contact Advantech for all compatible iDoor lists

### UNO-2372G-J0

- **20703WC70S0035** WEC7 MUI V4.02 B117 image
- **20704WE7PS0003** WS7P X64 MUI V4.19 B039 image
- **20703WX9ES0025** WIN10 2019 LTSC v6.05 B016 image
- **20704WX1ES0004** WIN10 2021 LTSC V6.08 B015 image
- **20703LEB1S0113** Image AdvLinuxTu V2.1.3 (Ubuntu 18.04)
- **20704U20DS0005** Image AdvLinuxTu V3.2.2(Ubuntu 20.04)

### UNO-2372G-J1

- **20703WX9ES0030** Img W10 2019 LTSC V6.05 B028
- **20703LEB1S0113** Image AdvLinuxTu V2.1.3 (Ubuntu 18.04)
- **20704U20DS0005** Image AdvLinuxTu V3.2.2(Ubuntu 20.04)

## Optional Accessories

### Operating system

- **96PSA-A60W24T2-3** A/D 100 ~ 240V 60W 24V C14 cord end terminal power adapter
- **1702002600** Power cable, US plug, 1.8 m (industrial grade)
- **1702002605** Power cable, EU plug, 1.8 m (industrial grade)
- **1702031801** Power cable, UK plug, 1.8 m (industrial grade)
- **1700000596** Power cable, China/Australia plug, 1.8 m (industrial grade)
- **UNO-2000G-DMKAE** UNO-2000 DIN-rail kit
- **UNO-2000G-VMKAE** UNO-2000 VESA mount kit
- **UNO-2000-LKAE** Cable locking kit, 10 units per pack
- **UNO-REPWR-AE** Remote power and reset control kit for UNO (only support on UNO-2372G-J1xxAE )
- **UNO-2372G-VEGA330** UNO-2372G 1st stack bottom plate for VEGA-330

### UNO-2372G-E0

- **20704WE7PS0004** WS7P X64 MUI V4.19 B040 image
- **20703WX9ES0025** WIN10 2019 LTSC v6.05 B016 image
- **20704WX1ES0002** WIN10 2021 LTSC V6.08 B015 image
- **20703LEB1S0113** Image AdvLinuxTu V2.1.3 (Ubuntu 18.04)
- **20704U20DS0005** Image AdvLinuxTu V3.2.2(Ubuntu 20.04)

# Stackable Extension Kits

## UNO-2372G-EKBE

Second stack module for supporting iDoor technology on UNO-2372G-xx21AE



### Specifications

General	
Ports	2 x iDOOR (Chassis only)
Dimensions	150 x 155 x 35 mm
Weight	200g
Environment	
Operating Temperature	-20 ~ 60 °C

### Ordering Information

P/N	Description
UNO-2372G-EKBE	UNO-2372G 2nd stack expansion module

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



### POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



### AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



### PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



### NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



### INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



### MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



### SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.