

# AIMB-228

## AMD V-series/R-series mini-ITX with 4 DP, 6 USB, 6COM, 12-24V DC-In

Preliminary




### Features

- Support AMD V1000/R1000/R2000 processor
- Two 260-pin SO-DIMM up to 32GB DDR4 2400/2666/3200 SDRAM
- Support multi display, Max up to 4 displays
- Supports 1 PCIe x8, 1x PCIe1(Golden finger) and 2 M.2 expansion slots
- 6 COM, 4 USB 2.0, 2 USB 3.1 Gen2
- Supports WISE-PaaS/RMM and Embedded Software APIs
- Support 12-24V wide voltage DC-In

#### Software APIs:



#### Utilities:




WISE-PaaS/RMM CE FCC RoHS COMPLIANT PRODUCT

### Specifications

Processor System	SOC (14nm)	V1807B	V1605B	V1202B	R1606G	R1505G	R1305G.	R1102G	R2544	R2514	R2314	R2312
	Max. Speed	3.8GHZ (Quad Core 54W)	3.6GHZ (Quad Core 25W)	3.2GHZ (Dual Core 25W)	3.5GHz (Dual Core 25W)	3.3GHz (Dual Core 25W)	2.8GHz (Dual Core 10W)	2.6GHz (Dual Core 6W)	3.7GHZ (Quad Core 54W)	3.7GHZ (Quad Core 35W)	3.5GHZ (Quad Core 35W)	3.5GHZ (Dual Core 25W)
	L2 Cache	2Mb	2Mb	2Mb	1Mb	1Mb	1Mb	1Mb	2Mb	2Mb	2Mb	1Mb
	BIOS	AMI 128Mbit SPI										
	M.2	1 B-Key, 1 E-Key (V1000/R2000 series only)										
Expansion Slot	PCIe	1 PCIe x8 (R1000/R2312 Series only support x4 signal, R1102 not support), 1 PCIe x1 (V1000 Series only)										
	Technology	Dual Channel DDR4 2400 / 2666 / 3200MHz SDRAM										
Memory	Max. Capacity	32 GB/16 GB per SO-DIMM										
	Socket	2 x 260-pin DDR4 SO-SIMM with ECC Support (R1102 only support 1 socket)										
	Controller	AMD Integrated Vega GCN										
Graphics	LVDS	1, supports dual channel 48-bit up to 1920 x 1200 (Optional)										
	Display Port 1.2	4, Supports DP++, resolution up to 4096 x 2160 @ 60Hz (R2544/R2514/R2314/V1000 Series) 3, Supports DP++, resolution up to 4096 x 2160 @ 60Hz (R2312/R1000 Series) 2, Supports DP++, resolution up to 4096 x 2160 @ 60Hz (R1102G)										
	Multi Display	R2544/R2514/R2314/V1000: DP/LVDS+DP+DP+DP R2312/R1000: DP/LVDS+DP+DP R1102G: DP/LVDS+DP										
	Interface	10/100/1000 Mbps										
Ethernet	Controller	GbE LAN1: Realtek 8111K GbE LAN2: Realtek 8111K										
	Connector	RJ-45 x 2										
	Max Data Transfer Rate	600 MB/s										
SATA	Channel	2, SATA 2 colay M.2 B-Key; SATA 1 support SATA-DOM device										
	DP1.2 (Default)	4 (R2544/R2514/R2314/V1000 Series)/3 (R2312/R1000 Series)/2 (R1102G)										
Rear I/O	Ethernet	2										
	USB	2 x USB 2.0/2 x USB 3.1 Gen2										
	Audio	2 (Line out + Mic/Line in)										
	DC jack	1 (2.5 mm)										
Internal Connector	LVDS & Inverter (Optional)	1/1										
	USB	2 x USB2.0										
	Serial	6, COM1: support RS-232 with 5V/12V/Ring COM2: support RS-232/422/485 supports 9 bit data/auto flow(select by Jumper) COM3: Colay Cctalk(5/12V: Jumper select) ; singlar mix with RS232 COM4: support 5V/12V selection(by jumper); Colay TTL (5V, TX, RX only) ; singlar mix with RS232 COM5: support RS-232/422/485 supports 9 bit data/auto flow(select by Jumper) COM6: RS-232										
	SATA	2										
	SATA PWR Connector	2										
	PS/2 KB & MS	1										
	Intrusion Protection	1										
	GPIO	16 bit										
	Watchdog Timer	Output	System reset									
	Interval	Programmable 1 ~ 255 sec/min										
Power	Power Type	Wide voltage 12~24V DC input; 1 x External DC jack; 1 x Internal 4-pin (2x2) power connector; Supports AT/ATX mode										
	Typical Power Consumption	Typical: 53W										
Environment	Operating	Operating					Non-Operating					
	Temperature	0 ~ 60° C (32 ~ 140° F)					-40 ~ 85° C (-40 ~ 185° F)					
Physical Characteristics	Dimensions	170 mm x 170 mm (6.69" x 6.69")										

## Block Diagram

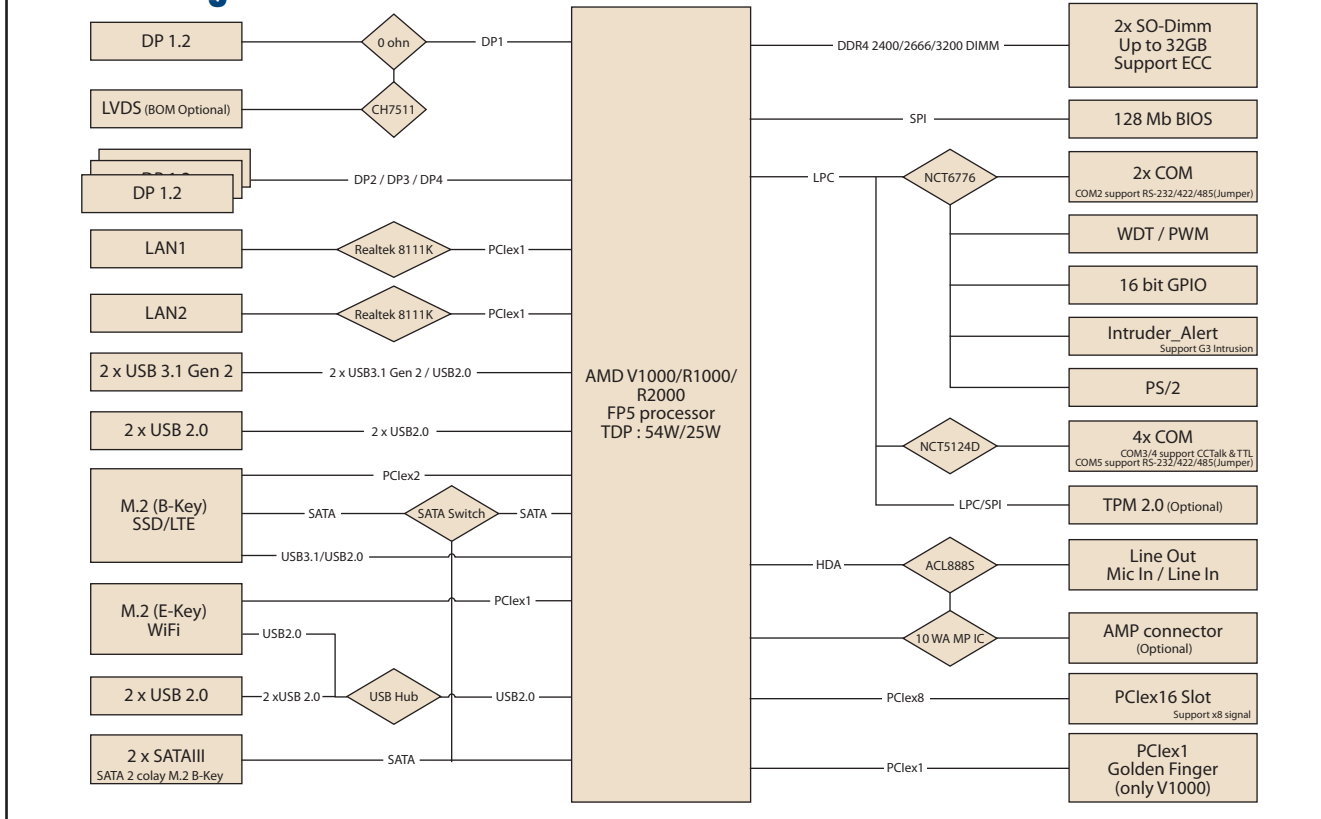

## Ordering Information

P/N	Chipset	DP	GbE LAN	COM	SATAIII	USB3.1/2.0	M.2(B Key)	M.2(E key)	PClex8	LVDS	TPM	AMP
AIMB-228VG2-00A2E	V1807B	4	2	6	2	2/4	1	1	X8	(1)	(1)	(1)
AIMB-228VG2-02A2E	V1605B	4	2	6	2	2/4	1	1	X8	(1)	(1)	(1)
AIMB-228VG2-03A2E	V1202B	4	2	6	2	2/4	1	1	X8	(1)	(1)	(1)
AIMB-228RG2-00A2E	R1606G	3	2	6	2	2/4	1	0	x4	(1)	(1)	(1)
AIMB-228RG2-01A2E	R1505G	3	2	6	2	2/4	1	0	x4	(1)	(1)	(1)
AIMB-228RG2-02A2E	R1305G	3	2	6	2	2/4	1	0	x4	(1)	(1)	(1)
AIMB-228RG2-03A2E	R1102G	2	2	6	2	2/4	1	0	NA	(1)	(1)	(1)
AIMB-228R2G2-00A2E	R2544	4	2	6	2	2/4	1	1	X8	(1)	(1)	(1)
AIMB-228R2G2-01A2E	R2514	4	2	6	2	2/4	1	1	X8	(1)	(1)	(1)
AIMB-228R2G2-02A2E	R2314	4	2	6	2	2/4	1	1	X8	(1)	(1)	(1)
AIMB-228R2G2-03A2E	R2312	3	2	6	2	2/4	1	0	x4	(1)	(1)	(1)

\*() BOM options available on MP version.

## Packing List

Part Number	Description	Quantity
1700003194	SATA HDD cable	1
1700018785	SATA power cable (1 port, 35cm)	1
1700022363-01	1-to-1 serial port cable 17CM	2
1960091400T001	I/O port bracket	1
2046022800	Startup manual	1
1960089783T001	CPU Cooler (CPU TDP 54W, V1807B/R2544)	1
1960089784T001	CPU Cooler (CPU TDP 35W)	1

## Optional Accessories

Part Number	Description
1700029538-01	F Cable D-SUB 9P(M)*4/IDE#2 40P-1.27 35CM
96PSA-A150W12W7-3	ADP A/D 100-240V 150W 12V LOCKABLE DC JACK
1702002600	Power cable 3-pin 180 cm, USA type
1702002605	Power cable 3-pin 180 cm, Europe type
1702031801	Power cable 3-pin 180 cm, UK type
1700000237	Power cable 3-pin PSE Mark 183 cm
1700000596-11	Power cable 3-pin 180 cm, China type

## Optional Chassis

Part Number	Description
AIMB-B2000-00YE	AIMB-B2000 wallmount chassis w/o adaptor

## I/O View



## Embedded OS

OS	Part No.	968 P/N	Description
Win10	20706WX9VS0039	968QW19VLE	img W10 19VL AIMB-228 64b 1809 ENU (V1807B/V1605B)
Win10	20706WX9ES0049	968QW19ELE	img W10 19EL AIMB-228 64b 1809 ENU (V1202B/R1606G/R1505G)

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 [obchod@autocont-ipc.cz](mailto:obchod@autocont-ipc.cz)

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.