


# AIMB-788

## LGA1700 12th/13th/14th Generation Intel® Core™ i9/i7/i5/i3 ATX Motherboard with DP/HDMI/VGA, DDR4, USB 3.2, M.2

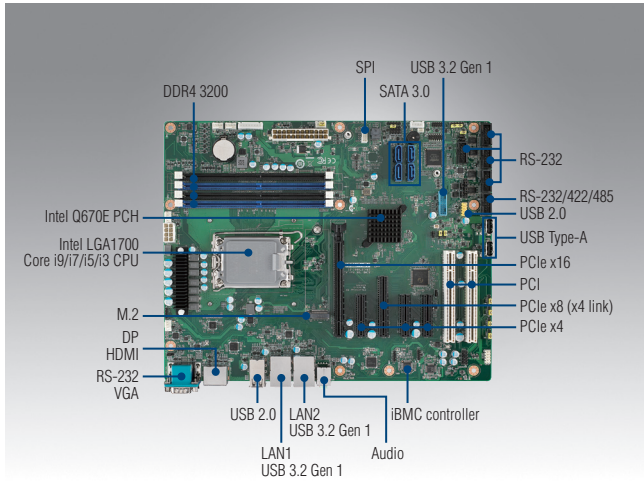

### Features

- Intel® 12th/13th/14th generation Core™ i9/i7/i5/i3 & Pentium®/Celeron® processor with Q670E chipset
- Four DIMM sockets up to 128 GB DDR4 3200
- Triple display DP/HDMI/VGA and dual GbE LAN
- M.2, SATA RAID 0, 1, 5, 10, USB 3.2 Gen 2
- Advantech iBMC remote out-of-band power management solution on DeviceOn
- Qualified for AWS (Amazon Web Service) IoT Greengrass

Note 1: Legacy platform is not supported.

Note 2: dTPM 2.0 module is required to enable Intel vPro and TPM technologies.

Note 3: Intel® Platform Trust Technology (Intel® PTT) ready for Windows 11.


### Quiet Specifications



14th Generation Processors	CPU	i9-14900	i9-14900T	i7-14700	i7-14700T	i5-14500	i5-14500T	i5-14400	i5-14400T	i5-14400F	i3-14100	i3-14100T	300	300T			
	P-core Base Frequency	2.0 GHz	1.1 GHz	2.1 GHz	1.3GHz	2.6 GHz	1.7 GHz	2.5 GHz	1.5 GHz	2.5 GHz	3.5 GHz	2.7 GHz	3.9 GHz	3.4 GHz			
	L3 Cache	36 MB	36 MB	33 MB	33 MB	24 MB	24 MB	20 MB	20 MB	20 MB	12 MB	12 MB	6 MB	6 MB			
	Cores	24	24	20	20	14	14	10	10	10	4	4	2	2			
Processor Base Power	65 W	35 W	65 W	35 W	65 W	35 W	65 W	35 W	65 W	60 W	35 W	46 W	35 W				
13th Generation Processors	CPU	i9-13900(E)	i9-13900TE	i7-13700(E)	i7-13700T(E)	i5-13500(E)	i5-13500T(E)	i5-13400(E)	i3-13100(E)	i3-13100T(E)							
	P-core Base Frequency	2.0 GHz	1.1 GHz	2.1 GHz	1.4 GHz	2.5 GHz	1.6 GHz	2.5 GHz	3.4 GHz	2.5 GHz							
	L3 Cache	36 MB	36 MB	30 MB	30 MB	24 MB	24 MB	20MB	12 MB	12 MB							
	Cores	24	24	16	16	14	14	10	4	4							
Processor Base Power	65 W	35 W	65 W	35 W	65 W	35 W	65 W	60 W	35 W								
12th Generation Processors	CPU	i9-12900(E)	i9-12900TE	i7-12700(E)	i7-12700TE	i5-12500(E)	i5-12400	i5-12500TE	i3-12100(E)	i3-12100TE	Pentium G7400E	Pentium G7400TE	Celeron G6900E	Celeron G6900TE			
	P-core Base Frequency	2.4 GHz	1.1 GHz	2.1 GHz	1.4 GHz	3.0 GHz	2.5 GHz	1.9 GHz	3.3 GHz	2.1 GHz	3.6 GHz	3.0 GHz	3.0 GHz	2.4 GHz			
	L3 Cache	30 MB	30 MB	25 MB	25 MB	18 MB	18 MB	18 MB	12 MB	12 MB	6 MB	6 MB	4 MB	4 MB			
	Cores	16	16	12	12	6	6	6	4	4	2	2	2	2			
Processor Base Power	65 W	35 W	65 W	35 W	65 W	65 W	35 W	60 W	35 W	46 W	35 W	46 W	35 W				
Processor System	Socket	LGA 1700															
	Chipset	Q670E															
Expansion Slot	BIOS	AMI 256Mbit SPI Flash															
	PCI	2															
	PCIe x4 (Gen 3)	3															
	PCIe x8 (Gen 3)	1 (x4 link)															
Memory	PCIe x16 (Gen 4)*	1															
	Technology	Dual Channel DDR4 3200 Non-ECC UDIMM															
Graphics	Max Capacity	128 GB															
	Sockets	4 x 288-pin DIMM															
Ethernet	Controller	Chipset integrated Intel UHD Graphics															
	VRAM	Shares system memory is subjected to OS															
SATA	Interface	10/100/1000 Mbps															
	Connector	2 x RJ-45															
Rear I/O	Controller	GbE LAN1: Intel I219-LM (PHY); GbE LAN2: Intel I210-AT															
	Max. Data Transfer Rate	600 MB/s															
	Channel	4															
	RAID	0, 1, 5, 10															
Watchdog Timer	VGA	1 (Resolution up to 1920 x 1200 @ 60Hz)															
	HDMI	1 (Resolution up to 3840 x 2160 @ 60Hz)															
	DisplayPort	1 (Resolution up to 4096 x 2304 @ 60Hz)															
	Ethernet	2															
	USB	8 (2 x USB 3.2 Gen 2, 2 x USB 3.2 Gen 1, 4 x USB 2.0)															
	Audio	2 (Line-out, Mic-in)															
Power Requirement	Serial	1 (RS-232)															
	Output	System reset															
Internal Connectors	Interval	Programmable 1 – 255 sec															
	Power On	Intel Core i 65W , DDR4 32 GB x 4															
	Voltage	+3.3 V			+5 V			+12 V			+5 Vsb			-12 V		-5 V	
	Current	1.41 A			2.42 A			0.24 A			0.13 A			0.04 A		0.05 A	
Environment	USB	6 (2 x USB 3.2 Gen 1 via pin header, 2 x USB 2.0 via pin header, 2 x USB 2.0 type A connector)															
	Serial	5 (4 x RS-232, 1 x RS-232/422/485)															
	SATA	4															
	M.2	1 (PCIex4 Gen 4 M-key 2280 type)															
	SPI	1 (Optional dTPM 2.0 module available)															
	GPIO	8-bit															
Physical Characteristics	Operating																
	Temperature	0 – 60 °C (32 – 140 °F), depends on CPU loading and system thermal solution									Non-Operating						
Humidity	95% @ 40 °C, non-condensing									-40 – 85 °C							
Dimension (L x H)	304.8 x 244 mm (12" x 9.6")																
Physical Characteristics	95% @ 60 °C, non-condensing																

\* The PCIe x16 slot, from CPU, can only support graphic cards and storage cards according to the specification recommended by Intel. Other types of add-on cards might not work properly. For the compatible device list validated on the PCIe x16 slot, please refer to the user manual.

**Block Diagram**

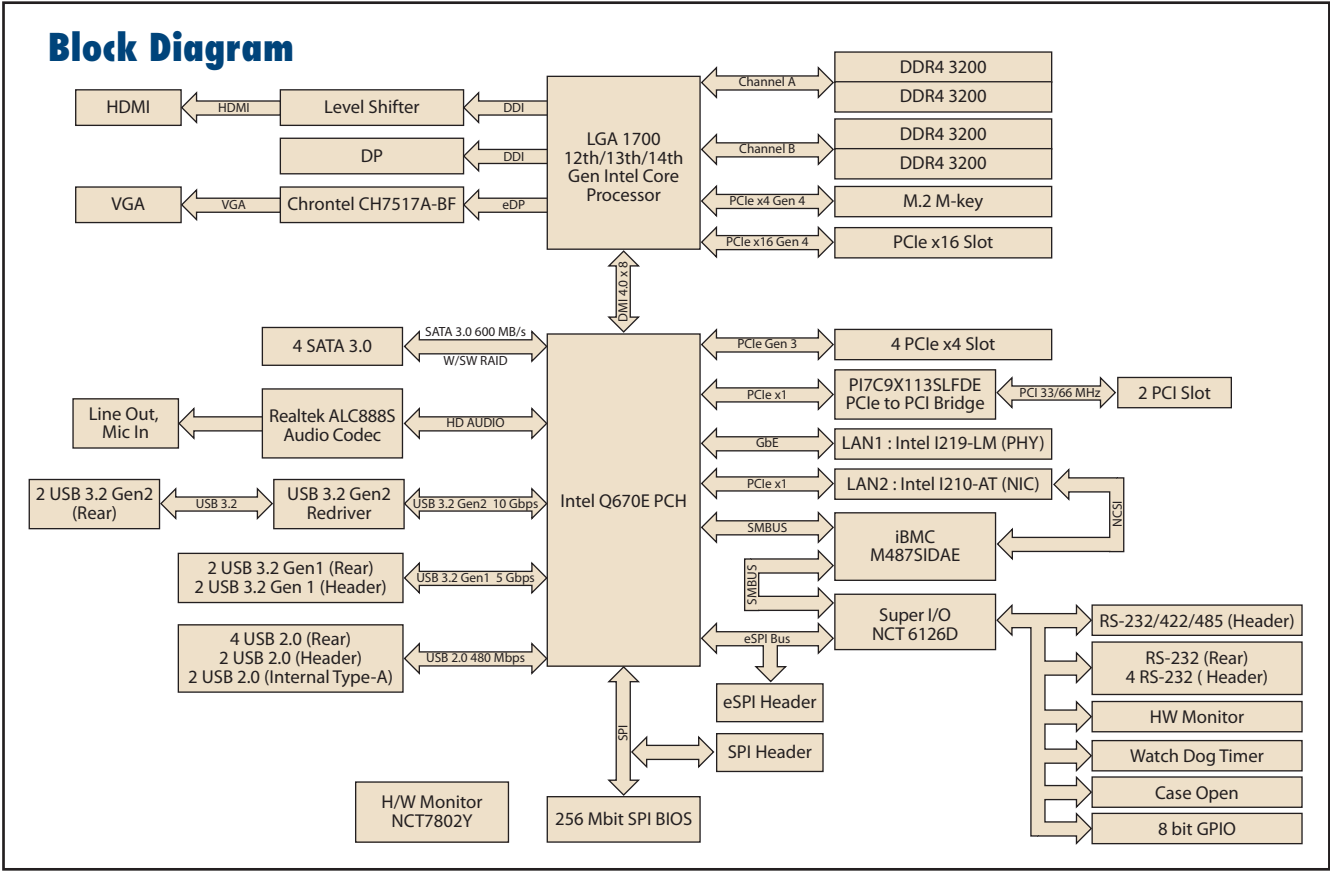

**Ordering Information**

Part number	Chipset	Memory	Display	USB 3.2 Gen 2	USB 3.2 Gen 1	USB 2.0	COM	GbE LAN	AMT	M.2	SATA 3.0	SW RAID	iBMC
AIMB-788G2-00A1	Q670E	Non-ECC UDIMM DDR4 3200 up to 128 GB	VGA + HDMI + DP	2	4	8	6	2	Yes	1	4	Yes	Yes
AIMB-788G2-00A1U	Q670E	Non-ECC UDIMM DDR4 3200 up to 128 GB	VGA + HDMI + DP	2	4	8	6	2	Yes	1	4	Yes	Yes

**Packing List**

Part Number	Description	Qty
1700003194	SATA data cable	2
1960104181T001	I/O port bracket (for 2U chassis or higher)	1
2041078800	Startup manual	1

Note: Driver CD is not provided. Please visit Advantech support website for driver download.

**I/O View**



AIMB-788G2-00A1  
AIMB-788G2-00A1U

**Optional Accessories**

Part number	Description
1700002204	2-port USB 2.0 cable w/ BKT(27 cm)
1700028292-01	2-port USB 3.0 cable w/ BKT(30 cm)
1970005349T000	CPU cooler for 2U, 4U, and wallmount chassis (for CPU Base Power=35~125W)
1701090401	Single COM port cable(40 cm)
1701092300	Dual COM port cable(28.5 cm)
1700022749-11/ 1700022749-12/ 1700022749-13	SATA power cable
PCA-TPMSPI-00A1	dTPM 2.0 SPI module to enable TPM and vPro technologies

Note: Purchasing AIMB-788's proprietary CPU cooler from Advantech is highly recommended. Other brands' CPU coolers are NOT compatible with AIMB-788. Especially the cooler type with fan aside is not allowed to use on AIMB-788 due to heat dissipation on MOSFET.

**Riser Card**

Part Number	Description
AIMB-R430P-03A2E	2U riser card with 3 PCI expansion
AIMB-R431F-21A1E	2U riser card with 1 PCIe x16 & 1 PCIe x1 expansion
AIMB-R43PF-21A1E	2U riser card with 1 PCIe x16 & 2 PCIe x1 expansion
AIMB-R4301-03A2E	2U riser card with 1 PCIe x1 expansion

Note: AIMB-788 is not compatible with 1U chassis.

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



### POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



### AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



### PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



### NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



### INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



### MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



### SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.