

# ITA-460

## Water-resistant Fanless In-vehicle Computer with Intel® 8th/9th Gen Core™ i CPU



### Features

- Intel® 8th/9th Gen Core™ i CPU (LGA1151)
- 8GB memory on board, 1 x SO-DIMM
- Supports 2 x Gigabit Ethernet, 2 x USB3.0/3.1
- Supports 2 x COM (RS232/422/485)
- Supports 1 x mSATA, 2 x 2.5" HDD/SSD
- Supports 3 x mini PCIe expansion sockets for integrating Wi-Fi, LTE, and GPS wireless communication modules through reserved 6 SMA connectors
- Supports 12/24V<sub>DC</sub> vehicle power
- All-around IP65 rating for protection from water and dust ingress
- Wide operating temperature (-25 ~ 60 °C / -13 ~ 140 °F)
- No RED Certificate




### Specifications


8th/9th Generation Processor (TDP 35W)	CPU	I7-9700TE	I5-9500TE	I3-9100TE	I7-8700T	I5-8500T				
	Core/Thread Number	8/8	6/6	4/4	6/12	6/6				
	Base Frequency	1.8GHz	2.2GHz	2.2GHz	2.4 GHz	2.1 GHz				
	Max Turbo Frequency	3.8GHz	3.6GHz	3.2GHz	4.0 GHz	3.5 GHz				
	L3 Cache	12MB	9MB	6MB	12MB	9MB				
	Chipset	H310								
	BIOS	AMI 256Mb SPI Flash								
8th/9th Generation Processor (TDP 65W)	CPU	I7-9700E	I5-9500E	I3-9100E	I7-8700	I5-8500	I3-8100	G5400	G4900	
	Core/Thread Number	8/8	6/6	4/4	6/12	6/6	4/4	2/4	2/2	
	Base Frequency	2.6GHz	3.0GHz	3.1GHz	3.2GHz	3.0GHz	3.6GHz	3.7GHz	2.9GHz	
	Max Turbo Frequency	4.4GHz	4.2GHz	3.7GHz	4.6GHz	4.1GHz				
	L3 Cache	12MB	8MB	6MB	12MB	9MB	6MB	4MB	2MB	
	Chipset	H310								
	Temperature	-10 ~ 40 °C (with Industrial SSD, 0.7 m/s air flow)								
Memory	BIOS	AMI 256Mb SPI Flash								
	Technology	Dual-channel DDR4 2400 MHz (without ECC)								
	Solder-down	8GB on board (optional 16GB on board)								
	Socket	1 x 260-pin DDR4 SO-DIMM (up to 16GB per socket)								
	Maximum Capacity	16GB (optional 32GB)								
Display	Chipset	H310: Intel® HD Graphics 610, supports DirectX 12								
	HDMI	1X HDMI (HDMI1.4b: up to 4096 x 2160@30Hz)								
Ethernet	Controller	Intel® i210T								
	Interface	2 x Gigabit Ethernet with M12 X-Coded								
Storage	SATA	2 x maximum 9 mm 2.5" HDD/SSD								
	mSATA	1 x mSATA slot on board								
I/O	USB	2 x USB3.0/3.1								
	Serial Port	DB9 x 1 (2 x RS-232/422/485 support sw programmable)								
	Audio	M12 A-Coded x 1 (1 x line out and 1 x mic in)								
Expansion	Mini PCIe	H310: 3 x mini PCIe (PCIe Gen3 x 1, USB 2.0 with 1 SIM slot)								
LED	LED	4 (1 x power, 1 x storage, and 2 x LAN )								
Power	Type	AT/ATX								
	Input Voltage	8 ~ 32 V <sub>DC</sub> (9.6 ~ 28.8V <sub>DC</sub> full loading)								
	Power consumption	Typical: 33W, maximum: 95W								
Watchdog Timer	Output	System reset								
	Interval	Programmable 1 ~ 255 sec/min								
Environment	Operating Temperature	35W CPU w/ industrial SSD -25 ~ 60 °C / -13 ~ 140 °F with 0.7 m/s air flow								
	Storage Temperature	-40 ~ 85 °C								
	Humidity	95% @ 40 °C (non-condensing)								
	Vibration	MIL-STD-810G, IEC 60721-3-5 Class 5M3 (Maximum: 5G, 8 hours, per axis)								
	Shock	MIL-STD-810G (75G 11 ms), IEC-60721-3-5 Class 5M3 (Operating: 100G 6ms)								
Mechanical	Dimensions (W x H x D)	190 x 70 x 220 mm (7.48" x 2.76" x 8.66")								
	Weight	4kg (8.82lbs)								
	Installation	Desktop/wall mount								
	IP	IP65 protection from water and dust ingress (IP-67 optional)								
Certifications	EMC	CE/FCC Class B, BSMI								
	Safety	CB/UL 62368, CCC, Emark, ISO 7637-2, BSMI								
OS Support		Windows 10, Linux Ubuntu 20.04 (Canonical Ubuntu certified and provide the Ubuntu support for 5 years)								

## Dimensions

Unit: mm

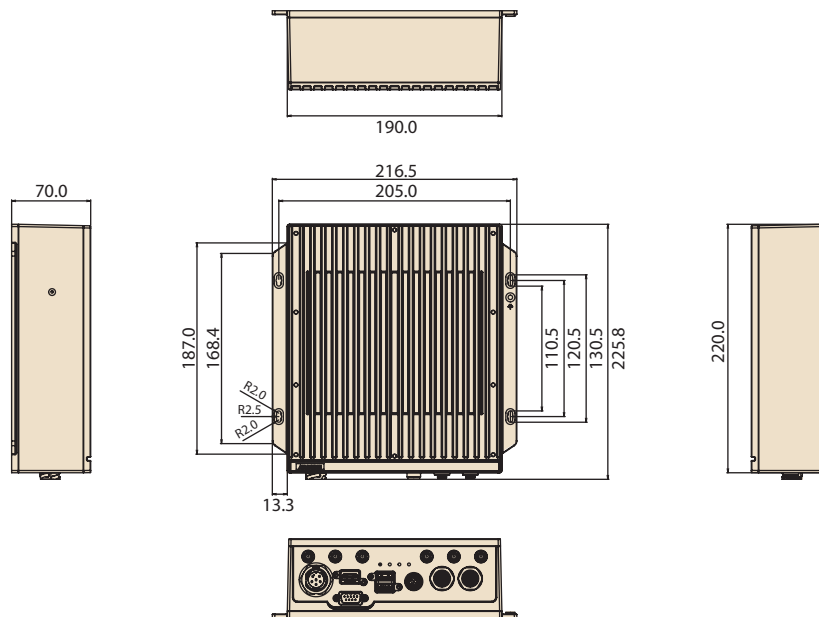

## Front View

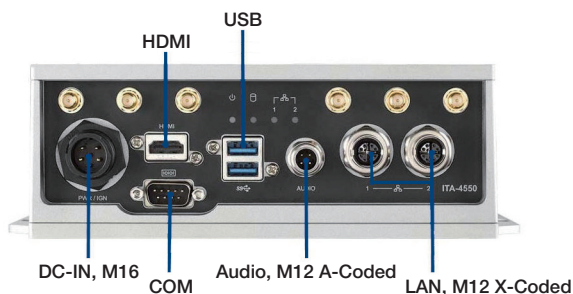

## Ordering Information

Part Number	Description	HDMI	2.5" SSD slot	mSATA slot	USB3.0/3.1	LAN	COM	miniPCIe slot	Power
ITA-460-LOA1	ITA-460, 8G onboard memory, barebone unit	1	2	1	2	2	2 (By Y cable)	3	8 ~ 32V <sub>DC</sub>

## Optional Accessories

Part Number	Product Description
96PSA-A150W19P4-4	ADP A/D 100-240V 150W 19V C14 TERMINAL BLOCK 4P
1702002600	Power cord (USA) UL/CSA, 3-pin, 10A, 125V, 1.83 M, 180 D
1702002605	Power cord (EU), 3-pin, 10A, 250V 1.83M, 90D
170000596-11	Power cord (CCC), 3-pin, 10A, 250V, 1.83 M, 180D
FRU-ITALAN-0003	External LAN cable (M12 X-Coded to RJ45)
FRU-ITAAUD-0002	External audio cable (M12 A-Coded to 2 x Audio Jack)

## Accessory Box List

Accessory	Description
Power cable	M16 6P (female) to 6P twisting and tinning stranded wires, 15cm
COM cable	D-SUB 9P (female) to 2 x D-SUB 9P (male), 15cm
SSD kit	SSD bracket and 2 x SATA cable
miniPCIe kit	Inner heatsink bracket, miniPCIe bracket
Thermal pad	Pads for SO-DIMM memory, mSATA, miniPCIe

For sales inquiries or further information, please contact us at [Rail@Advantech.com.tw](mailto:Rail@Advantech.com.tw)

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 [obchod@autocont-ipc.cz](mailto:obchod@autocont-ipc.cz)

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.