


# MIO-2364

## Intel® Core™ i3-N305 Processor, Intel® Processor N-series, and Intel Atom® Processor x7000E Series Pico-ITX SBC (Code name: Alder Lake N)

NEW

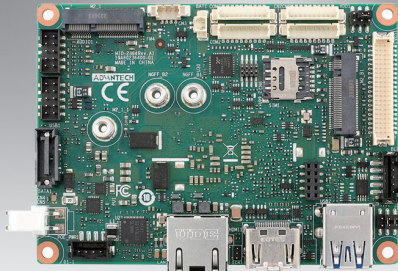

Windows 10

WISE-DeviceOn iManager CE FCC

## Specifications

Platform	Processor	i3-N305	N97	x7211E
	Max. Frequency	3.80 GHz	3.60 GHz	3.20 GHz
	Base Frequency	TBU	TBU	TBU
	Core/Thread	8/8	4/4	2/2
	LLC	6MB	6MB	6MB
	CPU TDP	15W	12W	6W
	Chipset	Intel 300 Series Chipset (SoC Integrated)		
Memory	BIOS	AMI EFI 256Mbit		
	Technology	DDR5-4800		
	Max. Capacity	Up to 16GB		
	Channel/Socket	Single Channel / One Socket		
Graphics	ECC Support	No	No	No
	Controller	Intel® UHD Graphics		
	Max. Frequency	1.25 GHz	1.20 GHz	1.00 GHz
	Execution Unit	32	24	16
Display I/F	3D/HW Acceleration	DX12, OGL4.0, OCL1.2, HW Encode: HEVC/H265, AVC/H264, VP9, HW Decode: HEVC/H265, AVC/H264, VP9		
	LCD	1 x LVDS, Dual Channel 18/24-bit, up to 1920 x 1080		
	HDMI/DP	1 x HDMI 1.4b, up to 3840 x 2160 x 24bpp@20-30Hz		
Ethernet	Multiple Display	Dual simultaneous displays by LVDS + HDMI		
	Controller	LAN: Intel i226LM		
External I/O	Speed	2.5 GbE		
	Ethernet	1 x RJ-45 Default support PoE/PSE, 802.3af (optional PoE/PD, 802.3at), TSN support on x7211E only		
	VGA/HDMI/DP	-/ / -		
	USB3.2/USB2.0	2/-		
Internal I/O	SATA	1 x SATA GenIII 6.0Gbps		
	USB2.0	2		
	Serial Bus	SMBus/I2C		
	COM Port	2 x RS-232/422/485		
	GPIO	8-bit general purpose input output I/O		
	Audio	Realtek ALC888s, Line-in/Line-out/MIC		
	Inverter	5V/12V, 2A		
	Smart Fan	12V, 0.3A (4-wire)		
	Front Panel Control	Power-on, Reset, Buzzer, SATA LED, Power LED, Case Open		
	Board Feature	Watchdog Timer	0-6553 sec	
TPM		fTPM support by Intel® Platform Trust Technology Discrete TPM2.0 (*optional)		
iManager 3.0		SW API for Hardware Monitor, Smart Fan Control, Brightness Control, I2C, GPIO, WDT		
Expansion	M.2 E-Key	1 x E-Key 2230 (PCIe x1, USB2.0)		
	M.2 B-Key	1 x B-Key 2242/3042/3052 (SATA x1 or PCIe x1, USB2.0 x1, USB3.0 x1) w/ Nano-SIM		
Power	Supply Voltage	Vin: DC 12V ± 10%; RTC Battery: Lithium 3V/210mAh		
	Connector	ATX 2pin 180D, optional ATX 2pin 90D		
	Power Management	AT, ATX		
	Max. Consumption	55.30W (12V)	43.50W (12V)	24.84W (12V)
Environment	Idle Consumption	10.38W (12V)	8.32W (12V)	10.33W (12V)
	Temperature	Operating: Standard: 0 ~ 60 °C (32 ~ 140 °F) Storage: -40 ~ 85 °C (-40 ~ 185 °F)		
	Humidity	Operating: 40 °C @ 95% relative humidity, non-condensing Storage: 60 °C @ 95% relative humidity, non-condensing		
Certification	Vibration Resistance	3.5 Grms		
	EMC	CE, FCC Class B		
Mechanical	Dimensions	100 x 72 mm (3.9" x 2.8")		
	Net Weight	75g		

\*Note: Support by request

## Features

- Intel® Core™ i3-N305, N-series N97, and x7000E Series x7211E
- DDR5-4800 up to 16GB
- Dual independent display: LVDS + HDMI
- GbE (optional PoE/PD, 802.3at), 4 USB, COM, SMBus/I2C
- Expansion: M.2 E-Key, M.2 B-Key
- Supports iManager & Software APIs, WISE-DeviceOn


### Software APIs:



### Utilities:



## Block Diagram

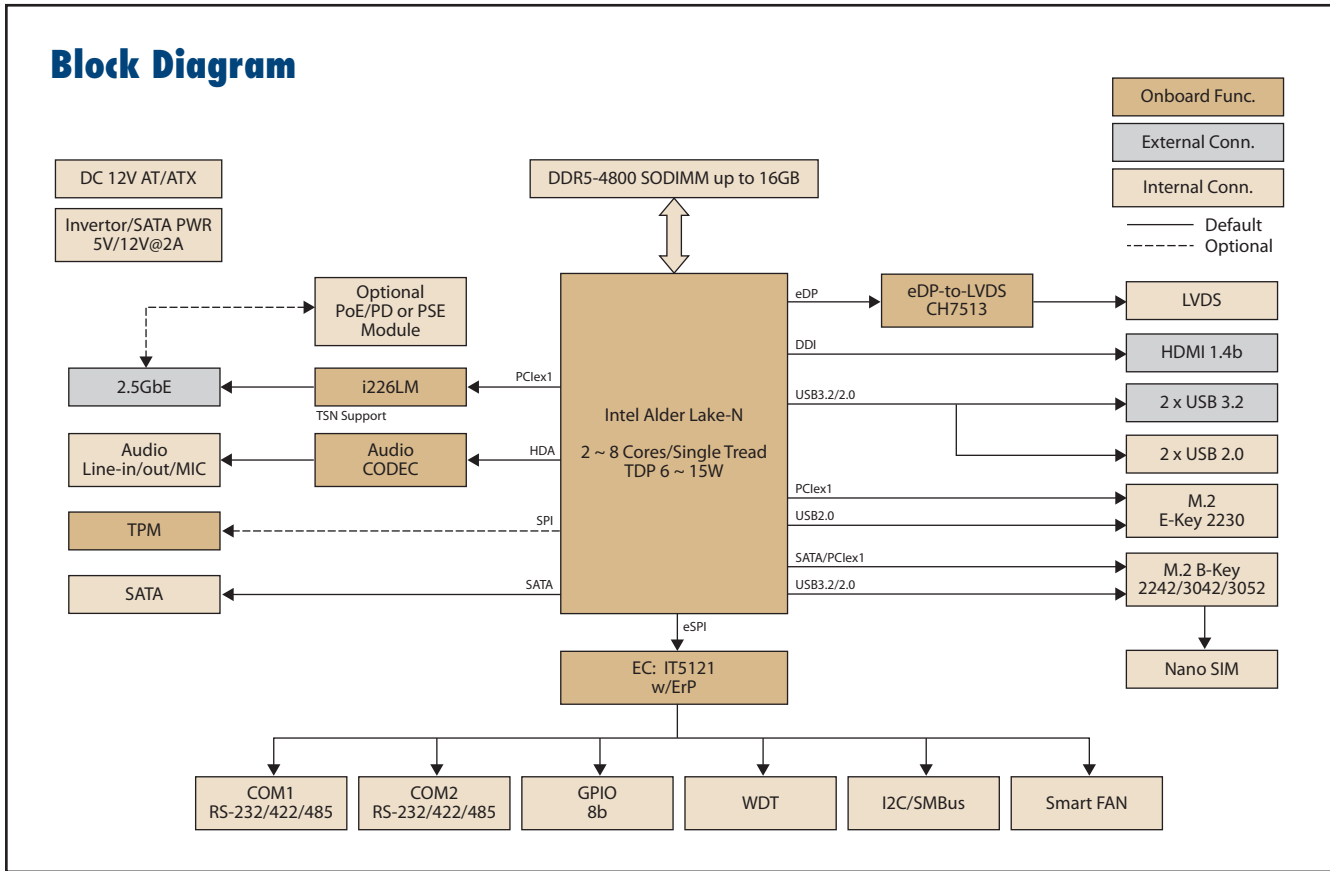

## Ordering Information

Part No.	CPU	TDP	Max. Frequency	Core	TSN	Thermal Solution	Operating Temperature
MIO-2364C3-P8A1	i3-N305	15W	3.80 GHz	8	No	Active	0 ~ 60 °C
MIO-2364N-P6A1	N97	12W	3.60 GHz	4	No	Passive	0 ~ 60 °C
MIO-2364A-P2A1	x7211E	6W	3.20 GHz	2	Yes	Passive	0 ~ 60 °C

## Packing List

Part No.	Description	Quantity
	MIO-2364 SBC	
	Startup Manual	
1700006291	SATA cable 30cm	1
1700027546-01	A CABLE SATA 15P/1*4P-2.5 35cm	1
1700030406-01	M Cable 2*5P-2.0/USB-A 4P(F)*2 20cm	1
1700030404-01	RS-232 9P(M)/1*10P-1.25 20cm	2
1700019584-01	A Cable 2*5P-2.0/Audio JACK*3 20cm	1
1700019705-01	AT power cable 12 cm	1
1970005708T001	MIO-2364 Active Cooler	1
1970005779T001	MIO-2364 Passive Heatsink	1

## Optional Accessories

Part No.	Description
TBD	MIO-2364 Heatspreader
1700034783-01	PoE/PD IN cable
1700034784-01	PoE/PD OUT cable
1700034521-01	PoE/PSE cable
TBD	PoE/PD module (Support by request)

## Embedded OS/API


OS	Part No.	Description
WIN10	TBD	64-bit (UEFI mode only)
Ubuntu 22.04 LTS	TBD	
Software API	Download by website	

## Rear I/O View



# Compatible Expansion Boards

## MIOe-PSE



### Specifications

Output DC Voltage	50V
Input DC Voltage	12-24V
Power Sourced at PSE module	15.4W / 30W per port
Power at PD (End-point)	12.95W / 25.5W per port
PoE Standard	IEEE 802.3 at
Operating temperature	-40 ~ 85 °C (-40 ~ 185 °F)
Humidity	Operating: 40 °C @ 95% relative humidity, non-condensing Storage: 60 °C @ 95%relative humidity, non-condensing
Vibration Resistance	3.5 Grms
EMC	CE, FCC Class B
Dimensions	72.1 x 44.0 x 1.6 mm

### Ordering Information

P/N	Description
MIOE-PSE-DPA1	MIOe-PSE PoE Module A1 Dual 15.4W
MIOE-PSE-SPA1	MIOe-PSE PoE Module A1 Single 30W

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 [obchod@autocont-ipc.cz](mailto:obchod@autocont-ipc.cz)

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.