


# MIO-5377R

## 13<sup>th</sup> Gen. Intel® Core™ Processors (Code Name: Raptor Lake-P) 3.5" SBC with USB4 for MXM GPU

NEW

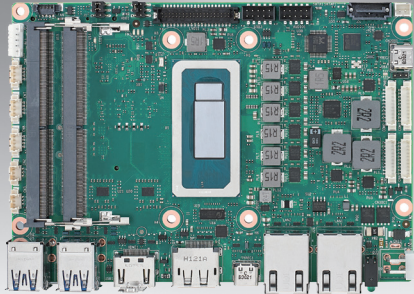

### Features

- 13<sup>th</sup> Gen. Intel® Core™ Processor up to 14 Cores, TDP 28/15W
- Dual Channel DDR5-4800 up to 64GB, IB ECC support by SKU
- 4 simultaneous displays: LVDS/HDMI/DP/USB-C Alt. DP
- 2x LAN, 8x USB (incl. 1x USB4), 4x UART, 2x CANBus, 3x I<sup>2</sup>C
- 3 Expansions: M.2 E-Key, B-Key, M-Key (support NVMe)
- Supports Windows 10 LTSC & Ubuntu 22.04 LTS, embedded software APIs, DeviceOn

#### Software APIs:



#### Utilities:




### Specifications

	Processor	i7-1370PE	i7-1370PRE	i7-1365UE	i7-1365URE	i5-1345UE	i3-1315UE	U300E
Platform	Max. Frequency (P-Core)	4.80 GHz	4.80 GHz	4.90 GHz	4.90 GHz	4.60 GHz	4.50 GHz	4.30 GHz
	Base Frequency (P-Core)	1.90 GHz	1.90 GHz	1.70 GHz	1.70 GHz	1.40 GHz	1.20 GHz	1.10 GHz
	Core/Thread	6P+8E / 20T	6P+8E / 20T	2P+8E / 12T	2P+8E / 12T	2P+8E / 12T	2P+4E / 8T	1P+4E / 6T
	Intel® Smart Cache (L3)	24MB	24MB	12MB	12MB	12MB	10MB	8MB
	CPU TDP	28W	28W	15W	15W	15W	15W	15W
Memory	Chipset	On-package Intel 600 Series Chipset						
	BIOS	AMI UEFI 256Mbit						
Memory	Technology	DDR5-4800						
	Max. Capacity	Up to 64GB						
	IB ECC	No	Yes	No	Yes	No	No	No
Graphics	Channel/Socket	Dual Channels / 2 sockets						
	Controller	Intel® Iris® Xe Graphics						Intel® UHD Graphics
	Max. Frequency	1.40 GHz	1.40 GHz	1.30 GHz	1.30 GHz	1.25 GHz	1.20 GHz	1.10 GHz
	Execution Units	96	96	96	96	80	64	48
Display I/F	3D/HW Acceleration	DX12.1, OGL4.6, OCL3.0, HW Encode: H.265/HEVC, H.264, MPEG2, HW Decode: H.265						
	LCD	1 x LVDS: Dual Channel 18/24-bit, up to 1920 x 1200						
	HDMI/DP	1 x HDMI 2.0b, up to 4096 x 2160 x 24bpp@60Hz 1 x DP1.4, up to 4096 x 2304 x 36bpp@60Hz						
Ethernet	Multiple Display	4 simultaneous displays via LVDS + HDMI + DP + USB Type-C Alt. Mode						
	Controller	LAN1: Intel i219 ; LAN2: Intel i226						
	Speed	LAN1: GbE ; LAN2: 2.5GbE						
External I/O	TSN support	No	Yes (LAN2 only)	No	Yes (LAN2 only)	No	No	No
	Ethernet	2 x RJ-45						
	HDMI/DP	1 x HDMI, 1 x DP						
	USB Type-C	1 x USB3.2 Gen2x1 10Gbps, support DisplayPort1.4 Alt. Mode						
	USB Type-A	4 x USB3.2 Gen2x1 10Gbps						
	LED	Power status, SATA R/W						
	Power DC-Jack	Optional						
Internal I/O	SATA	1 x SATA GenIII 6.0Gbps						
	USB4	1 USB4 with USB Type-C, Bandwidth min. 20Gbps, max. 40Gbps, with USB3.2, Display & PCIe						
	USB2.0	2						
	COM Port	2 x RS-232/422/485, 2 x RS-232 (4-wire), max. 1Mbps						
	CAN Bus	2 x CAN2.0						
	Serial Bus	3 x FC (CN6 is BOM option to 1 x SMBus by request; First priority is to use CN6; On Windows, CN7 & CN8 are supported by custom BIOS)						
	Audio	Realtek ALC888s, Line-in/Line-out/MIC						
	GPIO	8-bit general purpose input output I/O						
	Inverter	12V/5V/3.3V selectable						
	Fan	12V, 1A (4-wire)						
Board Feature	Front Panel Control	Power-on, Reset, Buzzer, SATA LED, CaseOpen						
	Watchdog Timer	65536 level, 0-65535 sec						
	TPM	Discrete TPM2.0 IC (*TPM support by request)						
	iManager 3.0	SW API for Hardware Monitor, Smart Fan Control, Brightness Control, FC, GPIO, WDT						
Expansion	M.2 E-Key	1 x E-Key 2230 (PCIex1, USB2.0) for WiFi/BT module						
	M.2 B-Key	1 x B-Key 3042 (PCIex1, SATA, USB2.0) for storage and 4G/LTE module w/ Nano SIM (Default with 3042. **Support 3052 for 5G module by request.)						
	M.2 M-Key	1 x M-Key 2280 (PCIe Gen4 x4) for NVMe SSD						
Power	Supply Voltage	Vin: DC 12V-24V ± 10%; RTC Battery: Lithium 3V/220mAH (*200mAH for Extend Temp. SKU)						
	Connector	ATX 2x2 pin 90D, optional DC-Jack, or ATX 2x2 pin 180D						
	Power Management	AT, ATX						
	Max. Consumption (*Ref. data with Burn-In Test. Please contact FAE for adapter selection.)	12V: 46.7W 24V: 48.5W	12V: 46.7W 24V: 48.5W	12V: 29.5W 24V: 29.7W	12V: 29.5W 24V: 29.7W	12V: 25.6W 24V: 27.5W	12V: 24.5W 24V: 25.1W	12V: 24.0W 24V: 26.3W
	Idle Consumption	12V: 23.4W 24V: 24.3W	12V: 23.4W 24V: 24.3W	12V: 18.8W 24V: 19.8W	12V: 18.8W 24V: 19.8W	12V: 17.6W 24V: 19.3W	12V: 15.8W 24V: 17.0W	12V: 15.7W 24V: 19.7W
Environment	Temperature	Operating: Standard: 0 - 60 °C (32 - 140 °F); *Extend: -40 - 85 °C (-40 - 185 °F), support with selected SKU Storage: -40 - 85 °C (-40 - 185 °F)						
	Humidity	Operating: 40 °C @ 95% relative humidity, non-condensing Storage: 60 °C @ 95% relative humidity, non-condensing						
	Vibration Resistance	3.5 Grms						
Certification	EMC	CE, FCC Class B						
Mechanical	Dimensions	146 x 102 mm (5.7" x 4")						

\*Note: Support by request

\*\*Note: 5G module test with Fibocom FM350 (MediaTek)

## Block Diagram

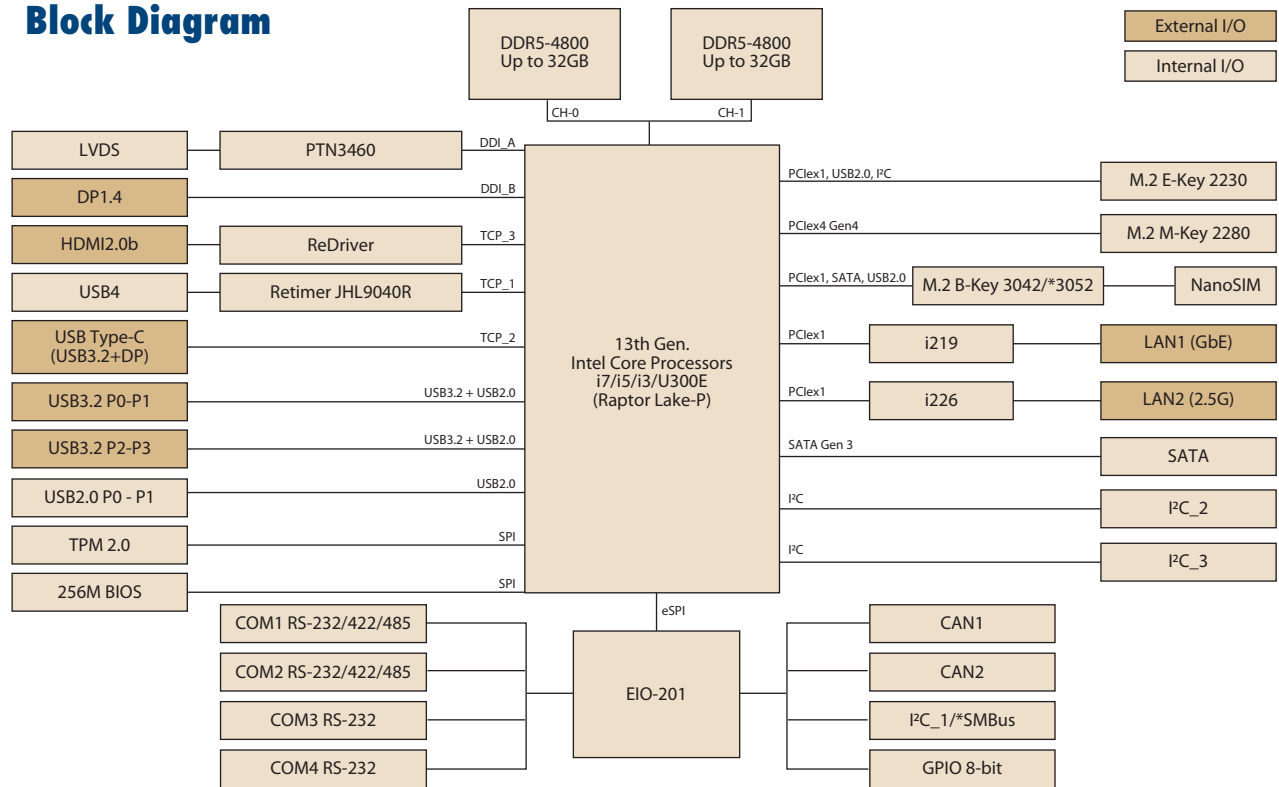

\*Note: Support by request

## Ordering Information

Part No.	CPU	Core	Max. Frequency	TDP	Memory IBCC	GPU	GPU Max. Frequency	Execution Units	LAN2 with TSN support	Thermal Solution	Operating Temperature
MIO-5377RC7P-Q8A1	i7-1370PE	6P+8E	4.80 GHz	28W	No	Xe Graphics	1.40 GHz	96 EUs	No	Active Cooler	0 ~ 60 °C
MIO-5377RC7PX-Q8A1	i7-1370PRE	6P+8E	4.80 GHz	28W	Yes	Xe Graphics	1.40 GHz	96 EUs	Yes	Active Cooler	-40 ~ 85 °C
MIO-5377RC7-Q9A1	i7-1365UE	2P+8E	4.90 GHz	15W	No	Xe Graphics	1.30 GHz	96 EUs	No	Passive Heatsink	0 ~ 60 °C
MIO-5377RC7X-Q9A1	i7-1365URE	2P+8E	4.90 GHz	15W	Yes	Xe Graphics	1.30 GHz	96 EUs	Yes	Passive Heatsink	-40 ~ 85 °C
MIO-5377RC5-Q6A1	i5-1345UE	2P+8E	4.60 GHz	15W	No	Xe Graphics	1.25 GHz	80 EUs	No	Passive Heatsink	0 ~ 60 °C
MIO-5377RC3-Q5A1	i3-1315UE	2P+4E	4.50 GHz	15W	No	UHD Graphics	1.20 GHz	64 EUs	No	Passive Heatsink	0 ~ 60 °C
MIO-5377RU-Q3A1	U300E	1P+4E	4.30 GHz	15W	No	UHD Graphics	1.10 GHz	48 EUs	No	Passive Heatsink	0 ~ 60 °C

## Packing List

Part No.	Description	Quantity
	MIO-5377 SBC	1
2046537701	Startup Manual	1
1700006291	SATA Cable, 30cm	1
1700031583-01	SATA Power Cable, 35cm	1
1700030406-01	USB 2.0 Cable, 20cm	1
1700030404-01	COM Port Cable: COM1/COM2, 20cm	2
1700031582-01	COM Port Cable: COM3/COM4, 20cm	2
1700019584-01	Audio Cable, 20cm	1
1970005548T001	MIO-5377 Heatsink (Passive for TDP 15W CPU)	1
1970005512T001	MIO-5377 QFCS (Active for TDP 28W CPU)	1

## Rear I/O View



## Optional Accessories

Part No.	Description
1970005615T001	MIO-5377 Heatspreader
MIOe-UMXM-FVA1	USB4 to MXM carrier card, ATX conn., 12V
MIOe-UMXM-WVA1	USB4 to MXM carrier card, Phoenix conn., 12-24V
1700034699-01	Thunderbolt3 cable (compatible to USB4), 20cm

## Embedded OS/API

OS	Part No.	Description
Windows 10 LTSC	20706WX1HS0057	Win10 IoT Ent. 2021 LTSC 64bit, High End: Core i7
	20706WX1VS0057	Win10 IoT Ent. 2021 LTSC 64bit, Value: Core i5/i3
	20706WX1ES0057	Win10 IoT Ent. 2021 LTSC 64bit, Entry: U300E
Ubuntu 22.04 LTS	20706U22DS0022	Ubuntu Desktop 22.04 LTS 64-bit
ROS2 Suite	Download from ESS-WIKI	Advantech ROS2 Suite v1.3.0
Software API	Website Download	SUSI v4.0
Yocto BSP	Support by Request	Yocto BSP and Test Image

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



### POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



### AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



### PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



### NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



### INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



### MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



### SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.