

PPC-415W

15.6" Fanless Widescreen Panel PC with Intel® 13th Gen Core™ i7/i5/i3 Processor



Features

- 15.6" true-flat Full HD LCD panel with projected capacitive touchscreen, anti-glare coating
- Intel® Core™ i7-1365URE/i5-1345URE/i3-1315URE processor with fanless system design
- Supports PCIe x4 or PCI expansion
- 1 x isolated RS-422/485 with auto flow
- Wide input power range (9 ~ 32 V_{DC})
- Dual 2500BASE-T Ethernet Supports Time-Sensitive Network(TSN) technology
- 3 x Independent displays
- 1 x M.2 bay (2242/2280) for storage only
- Support TPM2.0 hardware security
- Supports VESA 100 mounting interface



Introduction


Designed for high-performance computing 13th gen applications, PPC-415W with a 15.6" FHD provides a superior human-machine interface and reliability, with multi-touch screen, rich I/O and aluminum alloy front bezel. The inclusion of PCIe/PCI slot for fieldbus or proprietary card expansion increases the system's compatibility for diverse applications. In addition, Time Sensitive Network(TSN)configuration integrated allows more possibilities for optimized industrial applications

Specifications

	CPU	i7-1365URE	i5-1345URE	i3-1315URE
System	Core	10	10	6
	Frequency	1.70 GHz upto 4.9 GHz with Turbo	1.40 GHz upto 4.6 GHz with Turbo	1.20 GHz upto 4.5 GHz with Turbo
	Cache	12 MB Intel® Smart Cache	12 MB Intel® Smart Cache	10 MB Intel® Smart Cache
	Memory	2 x SODIMM, DDR5 4800, max. 32GB x 2		
	Storage	1 x 2.5" SATA bay (Max. 7mm) 1 x M.2 2242/2280 M Key slot for Storage (SATA or NVME PCIe x 4 , support SATA RAID)		
	Network (LAN)	2 x Intel I226LM controller; Speed: 10M / 100M / 1000M / 2.5G		
	I/O	5 x Serial ports: 2 x RS-232, 1 x RS-422/485 with 1K VDC isolation, 2 x RS-232 (on right side optional) 3 x USB3.2, 1 x USB2.0 1 x Line-Out, 1 x Mic-In 1 x HDMI 1.4 1 x DisplayPort (1.4a) 1 x 8bit GPIO (optional)		
	Expansion	1 x M.2 2230 E Key slot for wireless card 1 x PCIe x 4 ; 1 x PCI (optional)		
	Watchdog Timer	255 timer levels, set up by software		
	Security	1 x TPM2.0		
Speaker	2 x 1W			
Physical Characteristics	Dimensions	419.7 x 269 x 59 mm (16.5 x 10.6 x 2.3 in)		
	Enclosure Front bezel	Die cast aluminum alloy Rear: PC+ABS		
	Mounting	Panel / VESA (100)		
	Weight	5.4kg (11.9 lb)		
OS Support	OS Support	Microsoft® Windows 11 (64-bit), Win 10 IOT LTSC, Linux		
Power Consumption	Input Voltage	9 ~ 32 V _{DC}		
	Power Consumption	i5-1345URE Typ.70W Max.105W (Burn-in test 8.1 in Windows 10 64bit)		
LCD	Display Type	15.6" TFT LCD (LED backlight)		
	Max. Resolution	1920 x 1080		
	Viewing Angle	85 (Left), 85 (Right), 85(Up), 85(Down)		
	Luminance (cd/m ²)	450		
	Contrast Ratio	800		
	Backlight Lifetime	50,000 hr (min.)		
Touchscreen	Touch Type	Multi-touch projected capacitive		
	Light Transmission	88 % ± 2 %		
	Controller	USB interface		
Environment	Operating Temperature	-20 ~ 60 °C (-4 ~ 140 °F)		
	Storage Temperature	-40 ~ 60 °C (-40 ~ 140 °F)		
	Relative Humidity	95% @ 40 °C (Non-Condensing)		
	Shock	Operating 10 G Peak Acceleration (11 ms Duration), Follows IEC 60068-2-27		
	Vibration	Operating Random Vibration Test 5 ~ 500Hz, 2Grms @with SSD, Follows IEC 60068-2-64		
	EMC	CE, FCC Class B, EN 61000-6-2, BSMI, UKCA		
	Safety	CB, UL, CCC, UKCA		
	Front Panel Protection	IP66 compliant		

Dimensions

Unit: mm

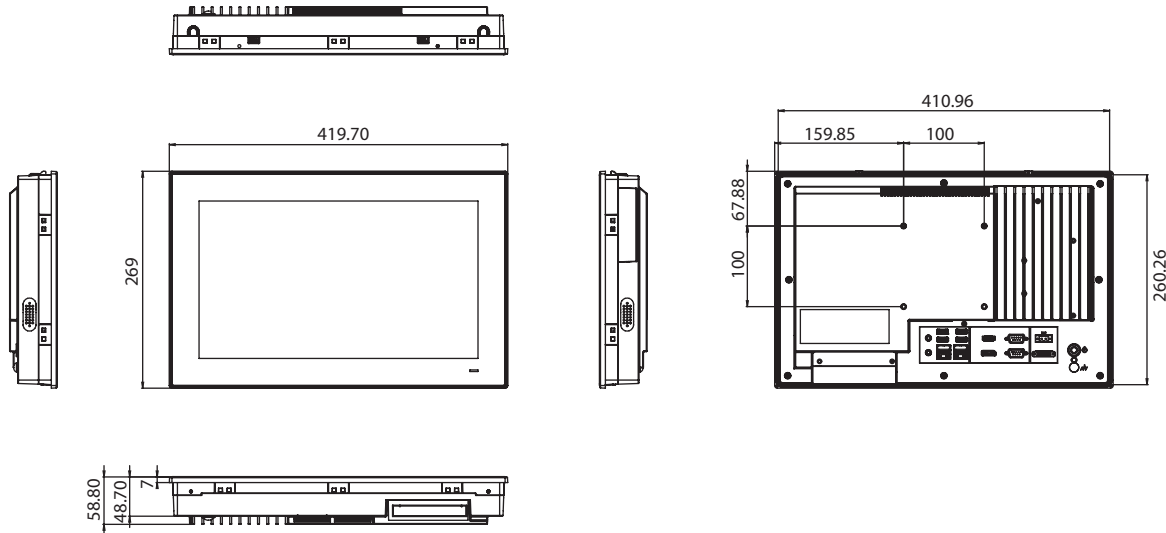


Panel Cutout Dimensions: 413 x 262 mm (16.25 x 10.31 in)

Ordering Information

Part Number	Description
PPC-415W-PD3A	15.6" PPC w/Intel i3-1315URE, P-CAP
PPC-415W-PD5A	15.6" PPC w/Intel i5-1345URE, P-CAP
PPC-415W-PD7A	15.6" PPC w/Intel i7-1365URE, P-CAP
96PSA-A150W19P2-4	Power adapter 100-240V 150W 19V
1702002600	Power Cable UL/CSA (USA) 180D 125V10A 1.83M
1702002605	Power Cable 90D 220V EUROPEAN 250V/6A 1.8M
1700000237	Power Cord PSE 3P 12A 125V 183cm
96CB-POWER-B-1.8MA	Power code 3P CCC(China) 1.8M
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-STAND-A1E	Stand for PPC series
PPC-ARM-A03	ARM VESA Standard for PPC series
PPC-WLAN-D2	M.2, WiFi6 +BT5.2, 2T2R, w/Antenna
98R3P321100	Additional ports module (either two RS-232 or one RS-232 and one GPIO port)
989KB01001E	PClex1 to PCI riser card

I/O View

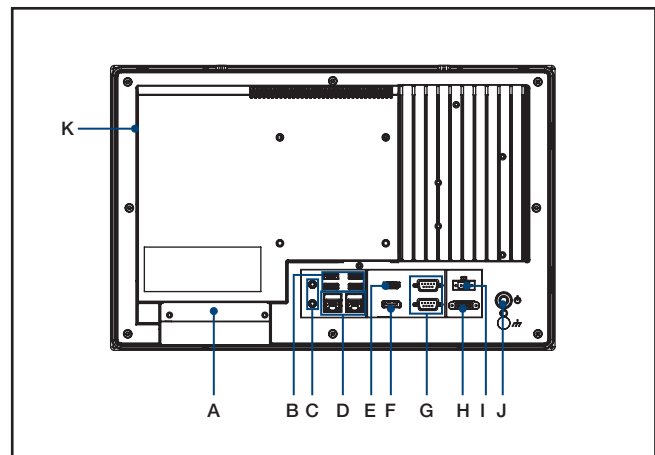

- A. 1 x Expansion slot (PCIe x 4 or PCI)
- B. 3 x USB3.2, 1 x USB2.0
- C. 1 x Mic-In/Line-Out
- D. 2 x Intel Gigabit Ethernet
- E. 1 x HDMI
- F. 1 x DisplayPort
- G. 2 x RS-232
- H. 1 x Isolated RS-422/485
- I. 1 x DC inlet and AT/ATX switch
- J. 1 x Power button
- K. 2 x RS-232 (on right side optional)

Please note: If some optional modules are offered with the system, additional system certificates may be required in certain regions/countries. Please contact Advantech for certificate compliance.

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.