


# UTC-515 (IP66 / 69K)

**15.6" Ubiquitous Touch Computer (IP66/69K)**  
**UTC-515IT-ATBOE with Intel® Core™ i5-1145G7E**  
**UTC-515JT-ATBOE with Intel® Celeron® J6412**

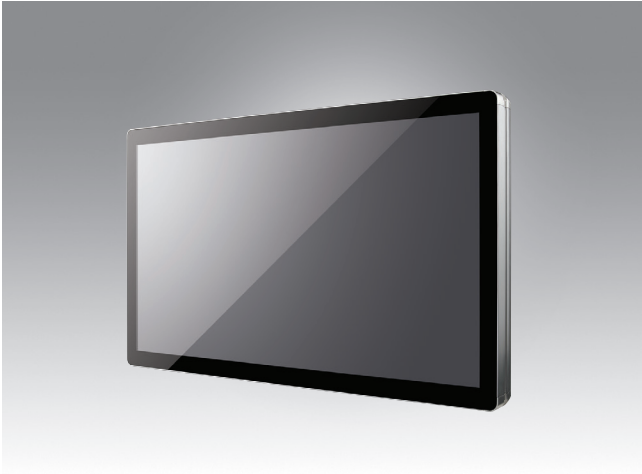

## Features

- 15.6" monitor with 16:9 widescreen display
- IP66/69K for full system
- Stainless chassis and Anti-corrosion enclosure
- M12 for all I/O ports
- Wide range system input rating, 11~32V
- Wide operating temperature range (-10 ~ 50 °C)
- Low power and fanless system design
- Supports both landscape and portrait screen orientations
- Full HD(1920x1080),brightness 1000nits LCD panel (optional)
- Waterproof Wifi Solution (optional)
- Build in camera / LED indicator / Light sensor (optional)



## Introduction


UTC-515 tough series features an all-in-one computing system equipped with wide format, touch based LCD panel. It is easy to integrate key peripherals and display systems for diversified self-service and interactive signage deploy in different application areas. The systems deliver updated information with well-designed interactive interfaces, fully ensure relevant content and targeted promotions are delivered. UTC series touch panel computers are the best investments to enhance user satisfaction, further brand equity, and maximize business profits.

## Specifications

Model	UTC-515IT-ATBOE	UTC-515JT-ATBOE	
Processor System	CPU	Intel® Core™ i5-1145G7E	Intel® Celeron® J6412
	Base Frequency	1.50/ 2.6 GHz/ Quad Core	2.0GHz/Quad core
	Cache	8 MB Intel® Smart Cache	1.5 MB L2 Cache
	Memory	2 x 260 pin SO-DIMM DDR4-3200 up to 64GB	1x 260 pin SO-DIMM DDR4-3200 up to 32GB
	HDD	1 x 2.5 internal SATA HDD bay	
	Network (LAN)	2 x Gigabit Ethernet ports (Supports Wake on LAN)	
	I/O ports	2 x RS-232 COM (RS-422/485)* 2 x USB 2.0/ 1 x USB 3.0 2 x Gigabit Ethernet (RJ-45) (M12 waterproof connector)	
	Bus expansion	1 x M.2 E-Key 2230(PCIe x 1, USB2.0, I2C) 1 x M.2 B-Key 3042 (USB2.0) w/ Nano-SIM 1 x M.2 M-Key 2280 (PCIe x4 Gen.4 for PCIe SSD), optional SATA	1 x E-Key for wireless module (Type: 2230) optional B-Key for LTE module 1 x M-Key support SATA M.2 2242 module
	Speaker	2x3W	
	Mounting	VESA 100 x 100 mm	
Dimensions (W x H x D)	415.63 x 264.94 x 58.8 mm		
Weight	6kg		
Operating System	Win 10 IoT Enterprise Linux Ubuntu	Win 10 IoT Enterprise Linux Ubuntu Android 12	
	Operating Temperature	-10 ~ 50 °C	
Environmental Specifications	Relative Humidity	95% @ 40 °C/104 °F, non-condensing	
	Vibration	Operating Random Vibration Test 5 ~ 500Hz, 1Grms @with HDD; 2Grms @with SSD	
	Shock	Operating 10G peak acceleration (11ms duration), follow IEC 60068-2-27	
	EMC/ Safety	CE, FCC, UL, CB	
	System Protection	IP66/69K full system	
Power Supply	System input rating	11V-32V	
	Adapter	24V / 5A	
	Power consumption	Typical 35W Max. 70W	
LCD Display	Size/Type	15.6" TFT LCD with LED backlight	
	Max. Resolution	FHD 1920 x 1080	
	Max. Color	16.7M	
	Pixel Pitch (um)	179.25 x 179.25	
	Brightness (cd/m²)	500 nits(1000 nits optional)	
	View Angle	178°/178°	
	Camera	Optional	
Light Sensor w LED Indicator	Optional		
Touch Screen Option	Type	Projected Capacitive, Glass Panel (7H Hardness)	
	Cover Glass Surface Treatment	Optional (AR / AG / Vandal Proof)	
	Light Transmission	88% ± 2%	
	Controller	USB Interface	

## Dimensions


Unit: mm

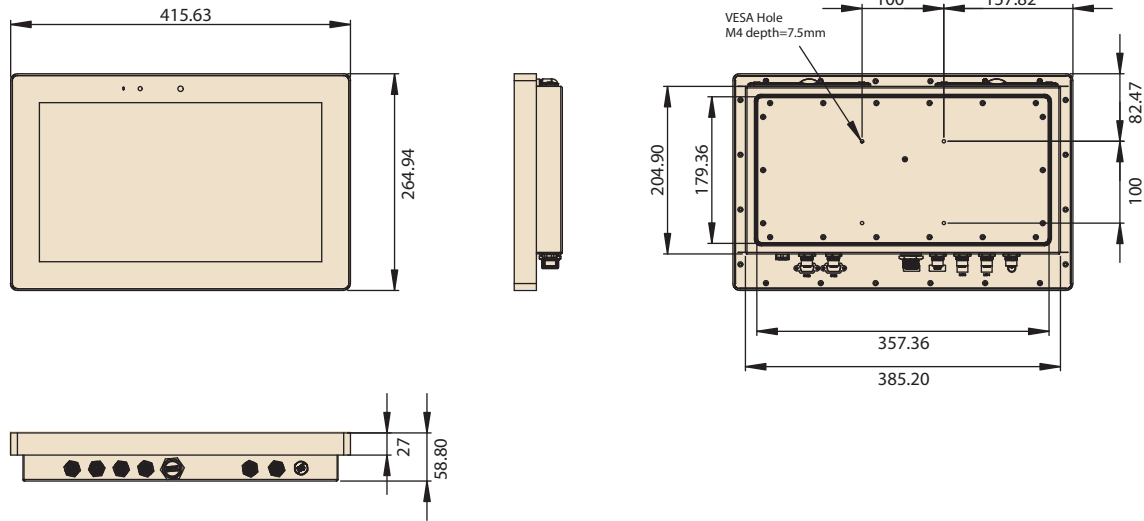

## Ordering Information

Part No.	Description
UTC-515IT-ATB0E	15.6" PCT.T/S with i5-1145G7E, 8GB RAM, 128G SSD, IP66/69K M12 connector AC 100-240Vac/DC output 24V, 5A adapter
UTC-515JT-ATB0E	15.6" PCT.T/S w/J6412, 4G RAM, 128G, IP66/69K M12 connector AC 100-240Vac/DC output 24V, 5A adapter
1702002605	Power cord 2P FRANCE 10A/16A 220V 1.83M 90D
1702002600	Power Cord 3P UL/CSA(USA) 125V 10A 1.83M 180D
170000596	Power Cord (China) CCC,10A 250V, 3P 1.83M
1700018704	Power Cord UK BSI 2P 10A 250V 1.8M 18AWG
Y5A0520000	Cable M-DIN 4P(F)/waterproof 5P 1M
Y5A0520001	A cable RJ45-8P8C/waterproof 8P 1M
Y5A0520002	M cable waterproof /USB-A 4P*2 1M
Y5A0520003	M Cable USB-A 9P(F)/Waterproof USB 9P(M) 1M
Y5A0520004	M Cable 1*9 P D-SUB/waterproof 10P 1M

## Fully- Integrated I/O (UTC-515 IP66/69K)

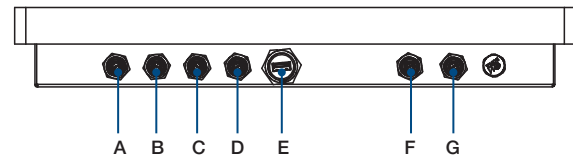

- A. Power Connector
- B. LAN 1
- C. LAN 2
- D. USB 2.0 x 2
- E. USB 3.0 x 1
- F. COM 1
- G. COM 2

# DeviceOn/iService

## Unified Remote Device Management Software




### Features

- Supports Advantech devices equipped with Windows, Android, and Linux OS
- Flexible device, location, user, and permissions management
- Enables remote monitoring and control of hardware, software, and peripherals
- Supports over-the-air (OTA) firmware and software updates
- Ensures quick, easy, and secure device onboarding
- RESTful APIs for third-party system integration

### Introduction

Advantech's DeviceOn/iService is a next-generation unified device management solution based on the WISE-DeviceOn platform. Designed to enable centralized monitoring and remote management, DeviceOn/iService supports Advantech devices equipped with Windows, Linux, or Android operating systems. The software also supports the management of applications and integrated peripherals, such as a barcode scanner, card reader, camera, and printer. Users can remotely access and control connected devices, take screenshots, rollout OTA upgrades, and use remote desktop capabilities for troubleshooting from any location at any time. Moreover, DeviceOn/iService supports batch operations to facilitate the management of multiple devices simultaneously for easy and convenient device configuration and deployment.

### Total Management



#### Devices & Hardware

- Windows, Linux, Android
- Hardware, storage, battery



#### Software & Peripherals

- Software monitoring & access
- Screens, USB devices, printers



#### Open for Expansion

- Peripheral integration
- Open APIs for integration

### Remote Access



#### Real-Time Monitoring

- Connection/hardware status
- Software/peripheral status
- Failure notifications



#### Remote Controls

- Power controls
- Audio, backlight controls
- Software controls



#### Troubleshooting

- Screenshots
- Remote desktop support

### Operational Efficiency



#### OTA updates

- System/software updates
- File repository management
- App store



#### Batch Controls

- 1-to-many batch reboot, etc.
- Time-saving tasks




#### Setup Booster

- Software/peripheral watchlist
- Roles, rule templates

Note: Some functions may vary according to the product

### System Architecture

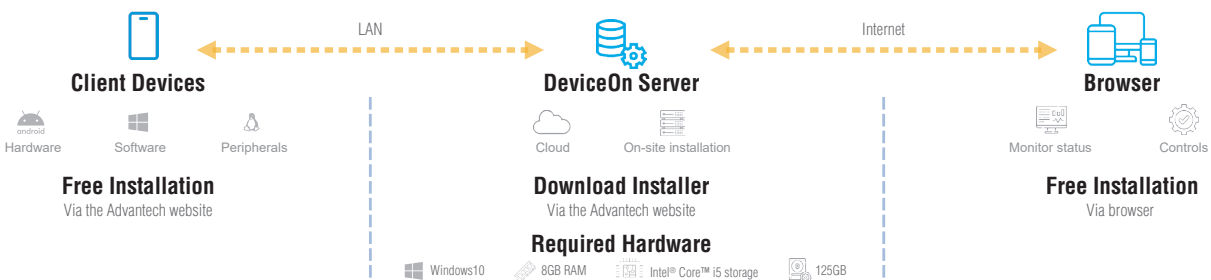

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 [obchod@autocont-ipc.cz](mailto:obchod@autocont-ipc.cz)

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.