

ICR-1602, ICR-1642

4G LTE Industrial Connectivity Gateway



Features

- Compact and ruggedized design
- LTE Cat.4 with 3G/2G fallback
- 2 × SIM for redundancy
- 2 × Ethernet 10/100/1000 Mbps
- Wide operational temperature range
- Wall-mount design and optional Din-Rail kits
- Linux based OS & SW customization
- Optional 1 × RS232 + 1 × RS485 + 1 × DI + 1 × DO (ICR-1642)
- Optional WiFi 5, IEEE802.11ac (ICR-1642W**)
- Optional GNSS receiver (ICR-1642G**)

** - Availability may vary. Please consult your local sales representative for more information.

Introduction



The ICR-1642/1602 series industrial connectivity gateway is designed for wireless communication, enabling IP devices and serial buses (ICR-1642) to connect to a cellular network. It is ideal for M2M and IoT applications, including kiosks, industrial PCs, HMIs, traffic controllers, meters, and UPS systems. LTE Cat.4 offers a peak downlink data rate of approximately 150 Mbps and an uplink peak data rate of 50 Mbps. The router features two Gigabit Ethernet ports and optional digital I/O (1 × DI, 1 × DO) and serial (1 × RS232 + 1 × RS485) connectivity on the ICR-1642. It can also be optionally equipped with WiFi 5 or GNSS.

The gateway supports VPN tunnel creation using various protocols to ensure secure communications. It includes diagnostic functions such as automatic monitoring of wireless and wired connections, automatic restart in case of connection loss, and a hardware watchdog that monitors the router status.

The ICR-1642/1602 series runs on the ICR-OS operating system, an open Linux platform that allows for extensive programming of custom software applications in C/C++. The router also supports uploading certain RouterApps (basic features only) to extend standard firmware functionalities.



WebAccess/VPN

WebAccess/DMP

Order Codes

Model no. - Order Codes		Region	2 × Gigabit Ethernet	2 × SIM	1 × RS232 1 × RS485 1 × DI, 1 × DO	GNSS	WiFi 5 1T1R
	ICR-1602-EU-A	EMEA	✓	✓			
	ICR-1642-EU-A	EMEA	✓	✓	✓		
	ICR-1602-CN-A	China	✓	✓			
	ICR-1642-CN-A	China	✓	✓	✓		
	ICR-1642W-EU-A**	EMEA	✓	✓	✓		✓
	ICR-1642G-EU-A**	EMEA	✓	✓	✓	✓	
	ICR-1642W-CN-A**	China	✓	✓	✓		✓
	ICR-1642G-CN-A**	China	✓	✓	✓	✓	

** - Availability may vary. Please consult your local sales representative for more information.

Specifications

System	
CPU	Cortex-A7 1.2GHz, ARMv7
Memory	RAM - 256 MB NAND Flash - 512 MB (60 MB for Router Apps, 26.7 MB for customer data)
Watchdog	HW Watchdog
Interfaces	
Ethernet	2 × Ethernet, RJ45, 10/100/1000 Mbps
Serial Lines (Optional - ICR-1642 only)	1 × RS232 (Tx, Rx, GND, RTS, CTS) 1 × RS485 (data-, data+, GND) (10-pin terminal block with Digital I/O)
I/O (Optional - ICR-1642 only)	1 × Digital input (dry contact) 1 × Digital output (open drain, 48 V / 100 mA) (10-pin terminal block together with RS232, RS485)
Reset Button	Reboot (< 4 s) / Factory reset (> 4 s)
LED Indicators	PWR: green only, blinking while system is ready SIG: green/orange/red for good/fair/poor signal SIM: green/orange for SIM1/2 USR: user defined for WiFi, serial, DI/O etc. USR: user defined for WiFi, serial, DI/O etc. ETH0 & ETH1 on RJ45

Environmental	
Power Supply	9 – 48 VDC (2-pin terminal block)
Consumption	Idle 3.8W / Average 4.5 W / Maximum 5.5 W (ICR-1642W) Idle 2.8W / Average 3.5 W / Maximum 3.8 W (ICR-1642)
Operating Temperature	-40 to +75°C
Storage Temperature	-40 to +85°C
Humidity	5 to 95 %
IP Cover	IP30
Physical Characteristics	
Dimensions	94 × 39 × 90 mm (W × H × D)
Enclosure	Metal case with grounding screw
Mounting	Wallmount Din-Rail (optional)
Weight	ICR-16XX: 331g (excluding accessories) LTE antenna: 25.2g WiFi antenna: 7.8g (for ICR-1642W only) Wall-mount bracket: 45g

WiFi - optional (ICR-1642W)	
-----------------------------	--

WiFi - optional (ICR-1642W)

Antenna	1 × R-SMA connector
Standards	IEEE802.11 ac/a/b/g/n 2.4GHz / 5GHz
Data Rate	Up to 433Mbps
Security	WEP, TKIP, AES, WPA, WPA2, WPA3, 802.1X
Modes	AP mode or STA mode

GNSS - optional (ICR-1642G)

Antenna	1 × SMA connector
Systems	GPS, GLONASS, BeiDou, Galileo, QZSS
Protocol	NMEA 0183
Ac Time-to-First-Fix	Warm start: 26 s, cold 35 s

Cellular Interface	
SIM Slots	2 × SIM (Micro SIMs – 3FF)
Antennas	2 × SMA Female (1 × main, 1 × diversity)
LTE Parameters	ICR-16xxx-EU: LTE-FDD bands: B1 (2100 MHz), B3 (1800 MHz), B7 (2600 MHz), B8 (900 MHz), B20 (800 MHz), B28A (700 MHz) LTE-TDD bands: B38 (2600 MHz), B40 (2300 MHz), B41 (2500 MHz) ICR-16xxx-CN: LTE-FDD bands: B1 (2100 MHz), B3 (1800 MHz), B5 (850MHz), B8 (900 MHz) LTE-TDD bands: B34 (2000MHz), B38 (2600 MHz), B39 (1900MHz), B40 (2300 MHz), B41 (2500 MHz) Transfer rate: LTE-FDD: 150 Mbps (DL), 50 Mbps (UL) LTE-TDD: 130 Mbps (DL), 30 Mbps (UL)
UMTS Parameters	ICR-16xxx-EU: WCDMA: B1/B8 Transfer rate: 384 kbps (DL/UL) ICR-16xxx-CN: WCDMA bands: B1/B8 Transfer rate: 384 kbps (DL/UL) TD-SCDMA bands: B34/B39 Transfer rate: 2.4 Mbps (DL), 2.2 Mbps (UL)
EVDO/CDMA Parameters	ICR-16xxx-CN: CDMA800 Transfer rate EVDO: 3.1 Mbps (DL), 1.8 Mbps (UL)
GSM Parameters	Supported frequencies: EGSM900/ DCS1800 Transfer rate: GPRS: 107 kbps (DL), 85.6 kbps (UL) EDGE: 296 kbps (DL), 236.8 kbps (UL)

Industrial Cellular Routers & Gateways

ICR-1602, ICR-1642

Software	
Operating System	ICR-OS (Linux based)
Application Development	Open Linux, BASH, C
Networking Features and Protocols	DHCP, NAT/PAT, SSH, VRRP, PPPoE, SNMP, SMTP, dynamic DNS client, DNS proxy, VLAN, QoS, NTP client/server, backup routes, port forwarding, host port routing, Ethernet bridging, load balancing, IPv6 dual stack
Industrial Protocols and IoT	*Modbus TCP2RTU, Modbus to MQTT
Security	HTTPS, SSH, SFTP, DMZ, Firewall (IP filtering, MAC address filtering, Inbound and outbound port filtering) VPN tunneling – WireGuard, OpenVPN, IPsec with IKEv1 and IKEv2, GRE, L2TP, PPTP Authentication – RADIUS, TACACS+, 2FA Encryption – DES, 3DES, AES, RSA, MD5, SHA
Firmware Management	Automatic firmware updates – server, locally via LAN or remotely via WAN Over-the-Air cellular module firmware updates
Diagnostic/Log	Status – Signal strength, data usage, detailed long term statistics One CLICK report – Current configuration, factory identification, routing table Log – System log, reboot log, kernel log Remote diagnostics (via SSH)
Event Engine	StartUp script & up/down script (own rules based on digital inputs, network parameters, data usage, timer, power)
Configuration	Web server, SSH, four configuration switchable profiles, automatic configuration update from server, backup & restore configuration
Advanced Software Tools	WebAccess/DMP – Remote device provisioning, monitoring & management platform WebAccess/VPN – Advanced secure networking platform

*Functionality is available with installed Router App

Standards & Regulations	
Radio	EN 301 511, EN 301 908-1, EN 301 908-2, EN 301 908-13, EN 303 413, EN 301 893, EN 300 328
EMC	EN 301 489-1, EN 301 489-17, EN 301 489-19, EN 301 489-52, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-11
Safety	EN 62368-1
National	CE, UKCA
Mechanical	EN 60529, EN 60068-2-27, EN 60068-2-64
Climatic	EN 60068-2-1, EN 60068-2-2, EN 60068-2-14, EN 60068-2-30
Environmental	REACH, RoHS3, WEEE
Cellular Module Approvals*	ICR-16XX-EU: GCF/ CE/ UKCA/ NCC/ RCM ICR-16XX-CN: SRRC/ NAL/ CCC

*- Approvals are valid for the integrated cellular module inside the router only. Cellular module approvals are not always applicable for the whole router – see "Standards and Regulations" chart for complete router approvals available.

Accessories










Part Number	Description	Included in the package
1751000532-01	2 x LTE antenna	✓
1751000533-01	1 x WiFi antenna, 2.4 / 5GHz (for ICR-1642W only)	
1652008574-01	10-pin Serial / IO connector (for ICR-164x only)	
1652002024	2-pin Power connector	
1960115642N001	Wall-mount bracket	
OPT1-DIN-ICR1X-00	DIN-Rail brackets (30 mm)	Optional
BB-RPS-v2-WR2-EU	Power Supply, 12V/1A, 2-pin, UK plug	Optional
BB-RPS-v2-WR2-UK	Power Supply, 12V/1A, 2-pin, UK plug	Optional
BB-RPS-v2-WR2-US	Power Supply, 12V/1A, 2-pin, US plug	Optional
OPT1-ANT-GNS-20	Active GNSS antenna, magnetic base, SMA-M (optional for ICR-16xxG)	Optional

For more Antenna accessories visit www.advantech.com

ICR-1602 Views

DIN mount









Wall mount

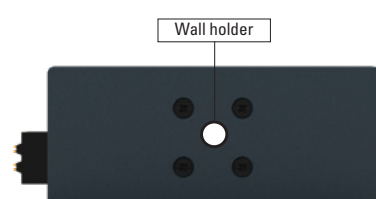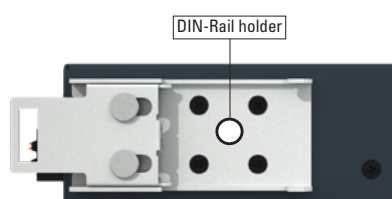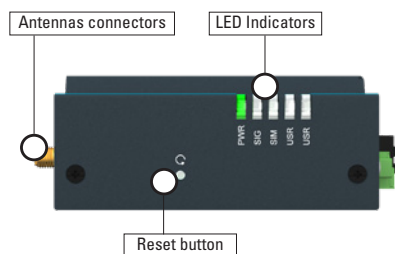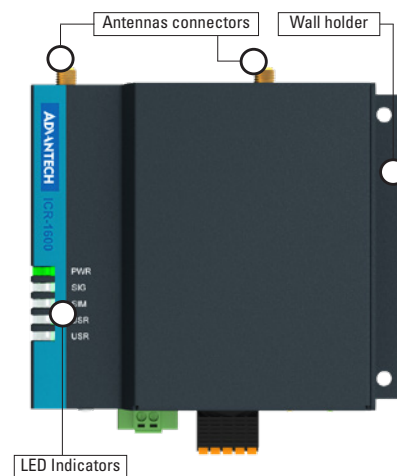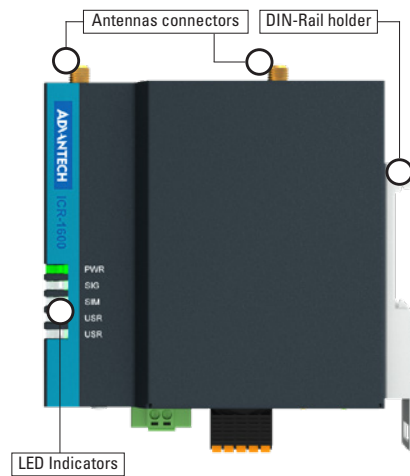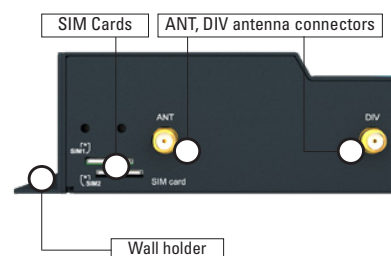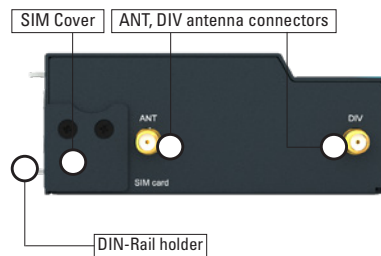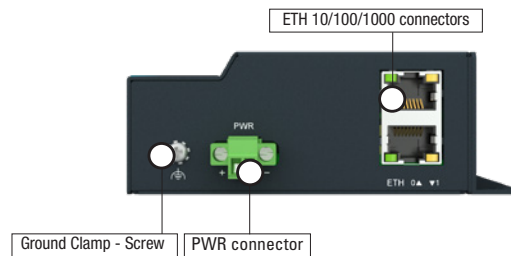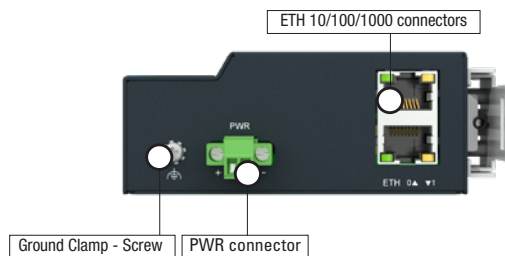

ICR-1642 Views

DIN mount


Wall mount

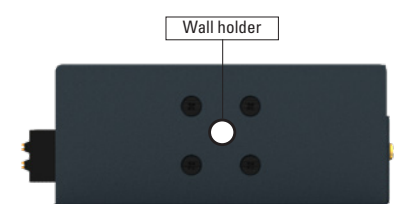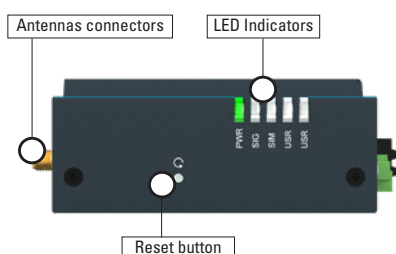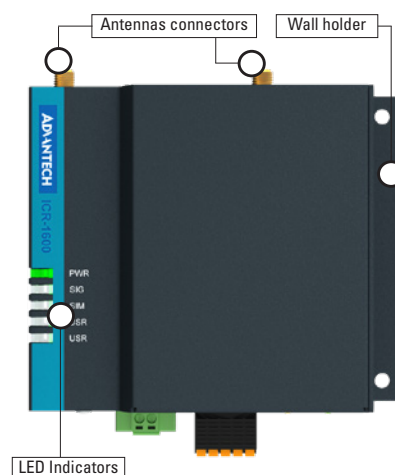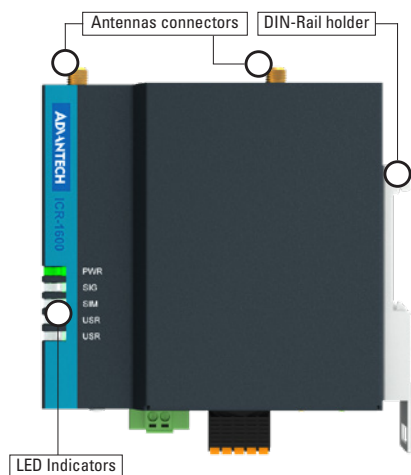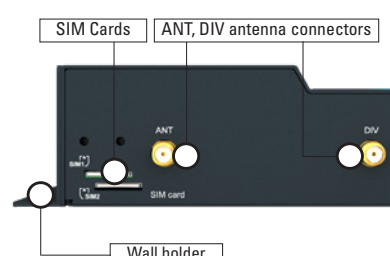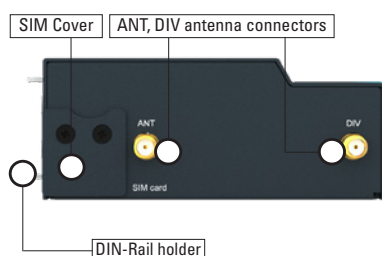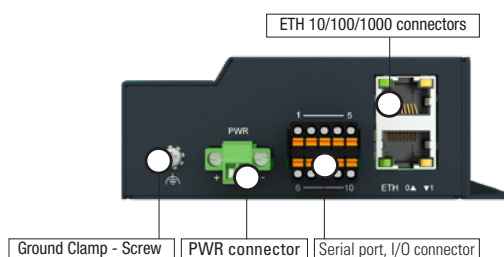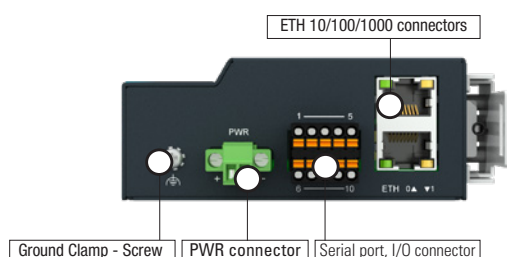


ICR-1602 - Dimensions - Technical Drawing

Unit: mm

Wall mount

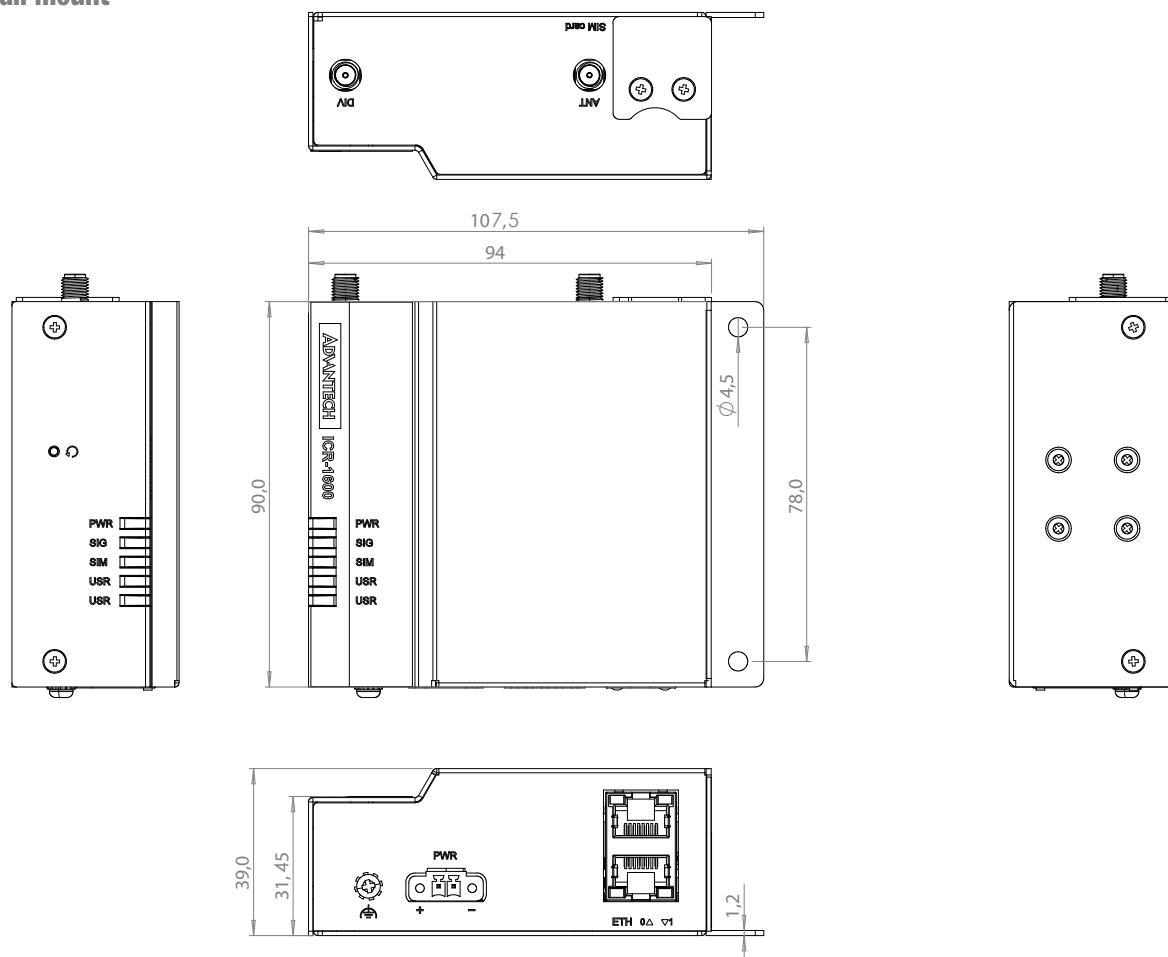


DIN Mount

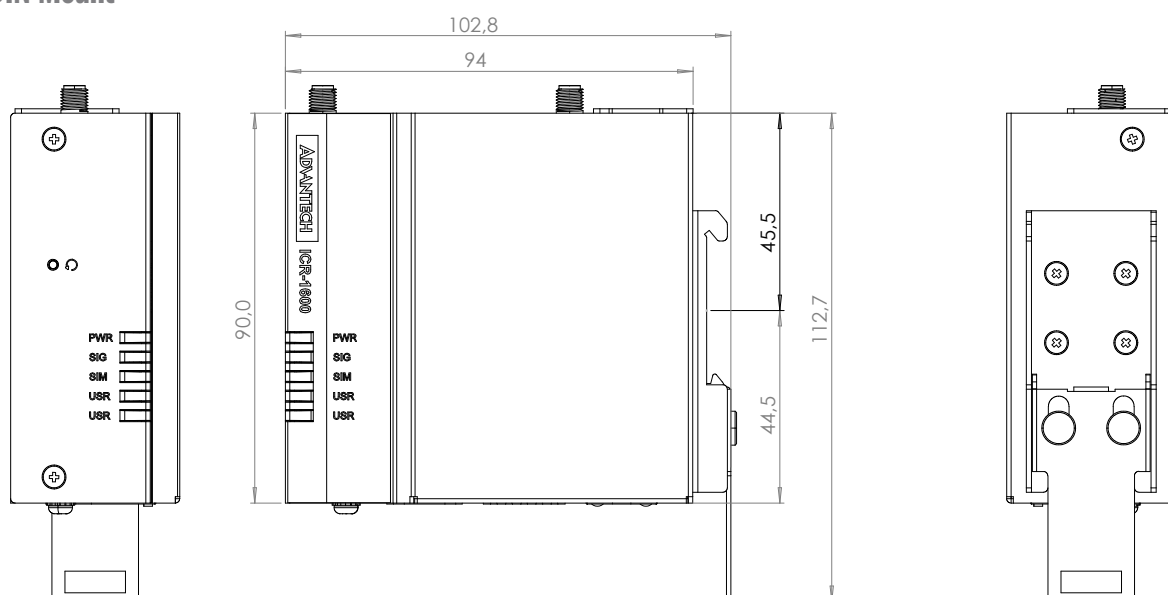


ICR-1642 Dimensions - Technical Drawing

Unit: mm

Wall Mount

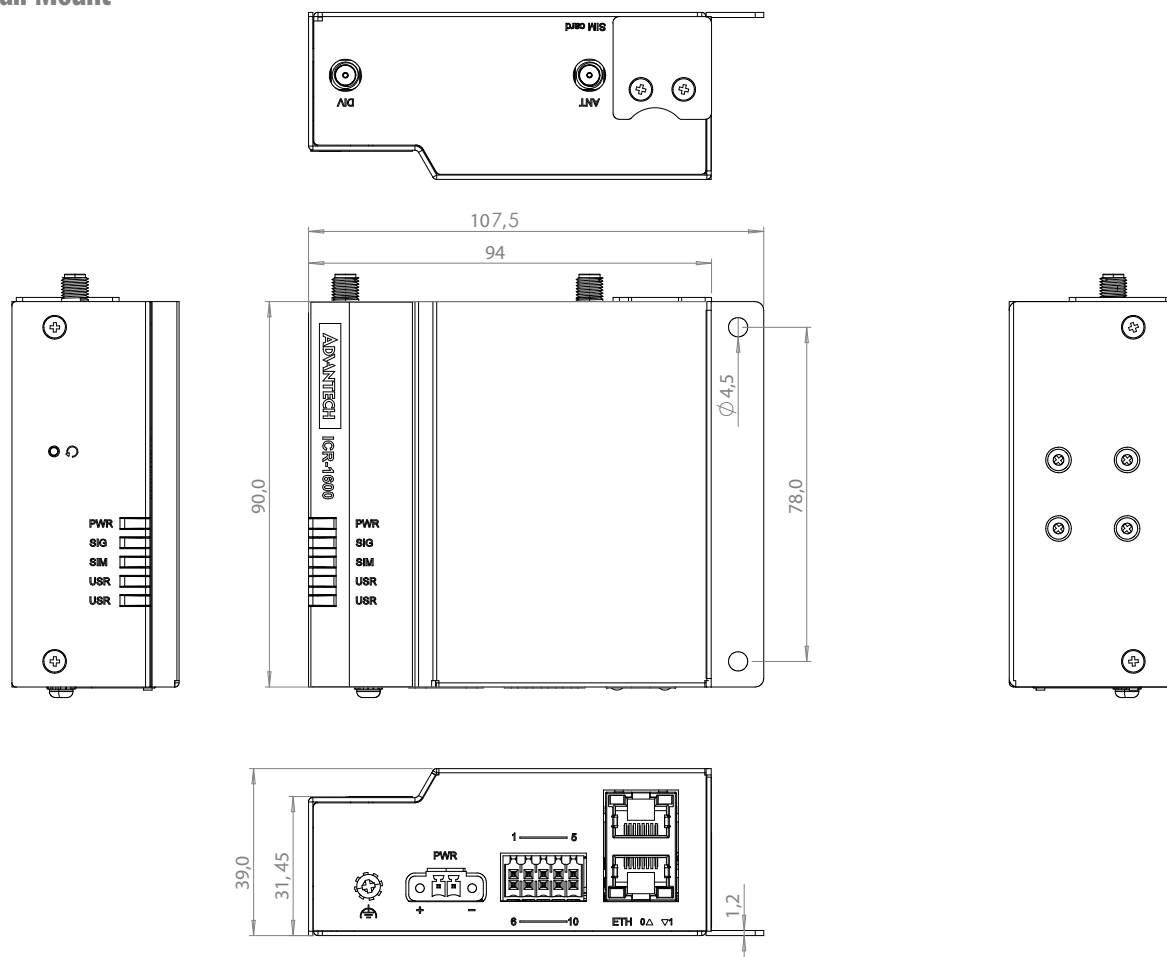

DIN Mount

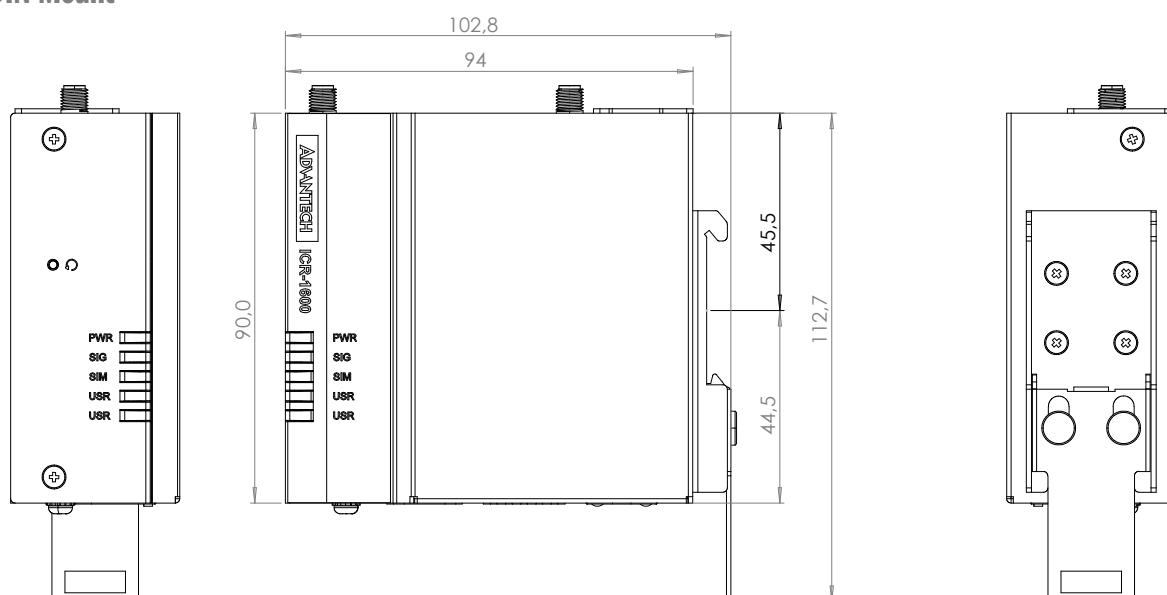

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.