

EKI-7720G-4FPI

16GE PoE + 4G SFP Ports Managed Redundant Industrial PoE Switch



Features

- 16 x Gigabit Ethernet ports + 4 x SFP ports
- Support up to 16 x IEEE 802.3af/at PoE ports for PD demands
- Redundancy: X-Ring Pro (ultra-high-speed recovery time, <20 ms), RSTP/STP (802.1w/1D)
- IXM function for fast deployment
- Security Pack with 802.1X, ACL, RADIUS, TACACS+, MAB Authentication, SNMPv3, HTTPS, SSH, and SFTP
- Management: SNMP v1/v2c/v3, WEB, Telnet, standard MIB, private MIB
- Supports NMS for easy and visualized to monitor and manage network remotely
- Dual 48 ~ 57V_{DC} power inputs and 1 x relay output

Introduction

The EKI-7720G-4FPI Gigabit managed PoE switch comes with 16 10/100/1000BaseT(X) ports with 802.3af/at supported and 4 Giga SFP ports. It features 16 IEEE802.3af/at PoE ports, -40~70°C operating temperature, and Din-Rail/Wall-Mount installation options, making it ideal for application which requires high-bandwidth transmission, more PoE ports, and Din-Rail installation.

In addition, it is also embedded with Advantech exclusive features like IXM which benefits users for fast deployment and can dramatically save engineers time and costs, X-Ring Pro which achieves ultra-high speed recovery time of less than 20ms to ensure network stability, and Security Pack which protects your network from internal intrusion.

Specifications

Interfaces / Communications

- **I/O Port** 16 x 10/100/1000BASE-T/TX RJ-45
4 x SFP (mini-GBIC) port
Auto-Negotiation, Full/Half Duplex Mode
Auto MDI/MDI-X Connection
- **Standards** IEEE 802.3 for 10BaseT
IEEE 802.3u for 100BaseT(X)/FX
IEEE 802.3ab 1000BaseT(X)
IEEE 802.3z for 1000BaseSX/LX/LHX/ZX
IEEE 802.3x for Flow Control
Port 1 ~ Port 16: IEEE 802.3at/af
- **PoE** RS-232 (RJ45)
- **Console port** 6-pin screw Terminal Block (including relay)
- **Power Connector**

Physical

- **Enclosure** Metal Shell
- **Protection Class** IP 30
- **Installation** DIN-Rail, Wall-mount
- **Dimensions (W x H x D)** 97 x 152 x 105 mm (3.819" x 5.984" x 4.134")

LED Indicators

- **System LED** PWR1, PWR2, SYS, Alarm and R.M.
- **Port LED** Link / Speed / Activity / PoE

Environment

- **Operating Temperature** -40 ~ 70°C (-40 ~ 158°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Ambient Relative Humidity** 5 ~ 95% (non-condensing)
- **Overload Current Protection** Present
- **Reverse Polarity Protection** Present
- **MTBF** 1,343,056 hours

Power

- **Power Consumption** 16W @ 55V_{DC} (System)
- **Power Input** 48 ~ 57V_{DC} for 802.3af
53 ~ 57V_{DC} for 802.3at
Redundant dual power input
420W
- **Power Budget** 1 Relay Output
- **Fault Output**

Certification


- **Safety** UL 62368-1
- **EMI** CE, CISPR 32, FCC Part 15B Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
EN 61000-6-2
EN 61000-6-4
- **EMC** IEC 60068-2-27
IEC 60068-2-32
- **Shock** IEC 60068-2-6
- **Freefall** NEMA TS-2
- **Vibration** EN 50121-4
- **Traffic control** IEC 62443-4-2
- **Railway Trackside**
- **Security**

Switch Properties

- **Switching Capacity** 40Gbps
- **Transmission Rate** 29.7Mpps
- **MAC Table Size** 8K
- **Jumbo Frame** 1,0240 Bytes
- **Packet Buffer Size** 4.1Mb
- **Max. IGMP Group** 256
- **Max. VLAN Group** 256 (VLAN ID 1 ~ 4094)

Dimensions

Unit: mm [inch]

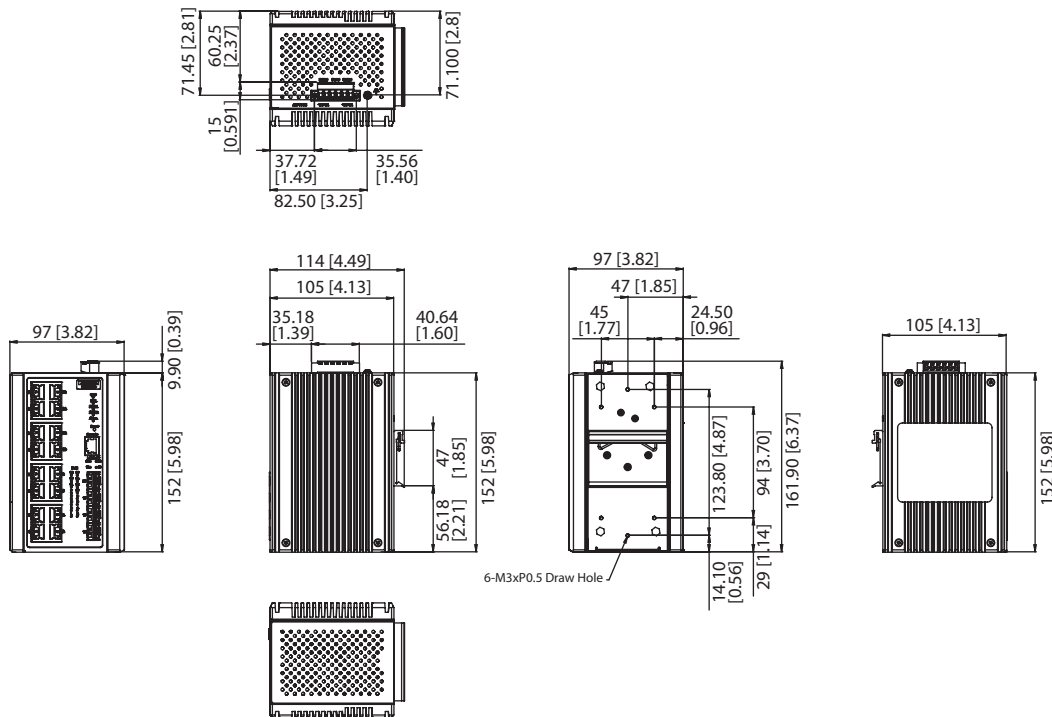

L2 Features

- **VLAN Arrange** 802.1Q Tag-based VLAN, 802.1ad QinQ VLAN Stacking
- **Port Mirroring** 1 to 1, N to 1
Max. Mirror Session: 4
- **RSPAN** Remote Switched Port Analysis
- **GARP** GVRP, GMRP
- **IP Multicast** IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- **Storm Control** Broadcast, Multicast, Unknown unicast
- **LLDP** 802.1ab LLDP, LLDP-MED
- **Industrial Protocol** Modbus/TCP
- **Redundancy** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring Pro, with ultra high-speed recovery time less than 20ms, ERPS(G.8032)

QoS

- **Priority Queue Scheduling** WRR (Weighted Round Robin), SP (Strict Scheduling Priority) Hybrid Priority, Max. Priority Queues: 8
- **Class of Service** IEEE 802.1p Based CoS, IP TOS, DSCP based CoS
- **Rate Limiting** Ingress Rate limit, Egress Rate limit
- **Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

Security

- **Port Security** Static/Dynamic MAC, Max. Learning Limit, MAC Violation Notice
- **802.1X** Port-based/MAC-based Authentication (MD5/PEAP/TLS/TTLS Encryption)
- **MAB** MAC Authentication Bypass
- **Authentication** RADIUS, TACAS+
- **IP Security** IP Source Guard, DHCP Snooping, ARP Spoofing Prevention
- **ACL** Access Control List (IP-ACL, MAC-ACL)
Max. ACL Entries: 128

Management

- **DHCP** Client, Server, Option66/67/82, DHCP Relay
- **Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB-II, Private MIB, Ethernet-Like MIB, RMON MIB (Group 1, 2, 3, 9)
- **Security access** SSH2.0, SSL
- **Software upgrade** TFTP, SFTP, HTTP, Dual Image
- **NTP** NTP client

Ordering Information

- **EKI-7720G-4FPI-BE** 16GE PoE + 4G SFP Managed PoE Switch w/Wide Temp.

Note: For SFP copper type, only 1000Mbps supported.

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při
objednávce nad 10 000 Kč bez DPH
nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače
s možností jejího prodloužení
až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují
za nižší ceny. Výše slevy se odvíjí
od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme
rozšířenou podporu a servis s garancí
výměny zařízení do 48 hodin.