

EKI-5710E

10 FE Port Managed Industrial Ethernet Switch

8FE + 2 x SFP Port Managed Industrial Ethernet Switch



Features

- Redundancy: X-Ring Pro (ultra-high-speed recovery time, <20 ms), RSTP/STP (802.1w/1D)
- IXM function for fast deployment
- Security Pack with 802.1X, ACL, RADIUS, TACACS+, MAB Authentication, SNMPv3, HTTPS, SSH, and SFTP
- Management: SNMP v1/v2c/v3, WEB, Telnet, standard MIB, private MIB
- Supports NMS for easy and visualized to monitor and manage network remotely
- Compact size and easy installation
- Dual 12 ~ 48 V DC power input and 1 x relay output

Introduction

The brand new EKI-5710E standalone managed series provide users with abundant port options for connecting to various device types, with up to 10 fast Ethernet ports and 2 SFP (mini-GBIC) ports. Slim type for easy installation and management, provides reliability and availability for your industrial network environment. These switches are embedded with Advantech's IXM function, which can benefit users with fast deployment while offering considerable savings on engineering time and costs. The series also support NMS to help IT managers with networking maintenance and failure prevention. Finally, these switches are equipped with X-Ring Pro, which can achieve ultra-high-speed recovery times of <20 ms, thus ensuring network stability. EKI-5710E features a wide operating temperature range of -40 ~ 75°C can fit in harsh environment.

Specifications

Interfaces / Communications

- **I/O Port**
 - EKI-5710E:
 - 10 x 10/100BASE T/TX RJ45
 - EKI-5710E-2FI:
 - 8 x 10/100BASE T/TX RJ45
 - 2 x SFP (mini-GBIC) port
- Auto-Negotiation, Full/Half Duplex Mode
- Auto MDI/MDI-X Connection
- **Standards**
 - IEEE 802.3 for 10BaseT
 - IEEE 802.3u for 100Base(X)/FX
 - IEEE 802.3x for Flow Control
 - IEEE 802.1D for STP
 - IEEE 802.1w for RSTP
 - IEEE 802.1Q for VLAN Tagging
 - IEEE 802.1p for CoS
- **Console port**
 - RS-232 (RJ45)
- **Power Connector**
 - 6-pin Terminal Block (including relay)

Physical

- **Enclosure**
 - Metal Shell
- **Protection Class**
 - IP 30
- **Installation**
 - DIN-Rail, Wall-mount
- **Dimensions (W x H x D)**
 - 40 x 152 x 105mm (1.57 x 5.98 x 4.13 inch)
- **Weight**
 - 600 g

LED Indicators

- **System LED**
 - P1, P2, R.M, ALM
- **Port LED**
 - RJ-45: Link / Speed / Activity
 - SFP: LNK / ACT

Environment

- **Operating Temperature**
 - 40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature**
 - 40 ~ 85°C (-40 ~ 185°F)
- **Ambient Relative Humidity**
 - 5 ~ 95% (non-condensing)
- **Overload Current Protection**
 - Present
- **Reverse Polarity Protection**
 - Present
- **MTBF**
 - TBC

Power


- **Power Consumption**
 - 6W @ 24V_{DC} (System)
- **Power Input**
 - 12 ~ 48 V_{DC}, redundant dual power input
- **Fault Output**
 - 1 Relay Output

Certification (Preliminary)

- **Safety**
 - EN62368-1
- **EMI**
 - CE, CISPR 32, FCC Part 15B Class A
- **EMS**
 - EN 61000-4-2
 - EN 61000-4-3
 - EN 61000-4-4
 - EN 61000-4-5
 - EN 61000-4-6
 - EN 61000-4-8
- **EMC**
 - EN 61000-6-2
 - EN 61000-6-4
- **Shock**
 - IEC 60068-2-27
- **Freefall**
 - IEC 60068-2-32
- **Vibration**
 - IEC 60068-2-6

Dimensions

Unit: mm [inch]

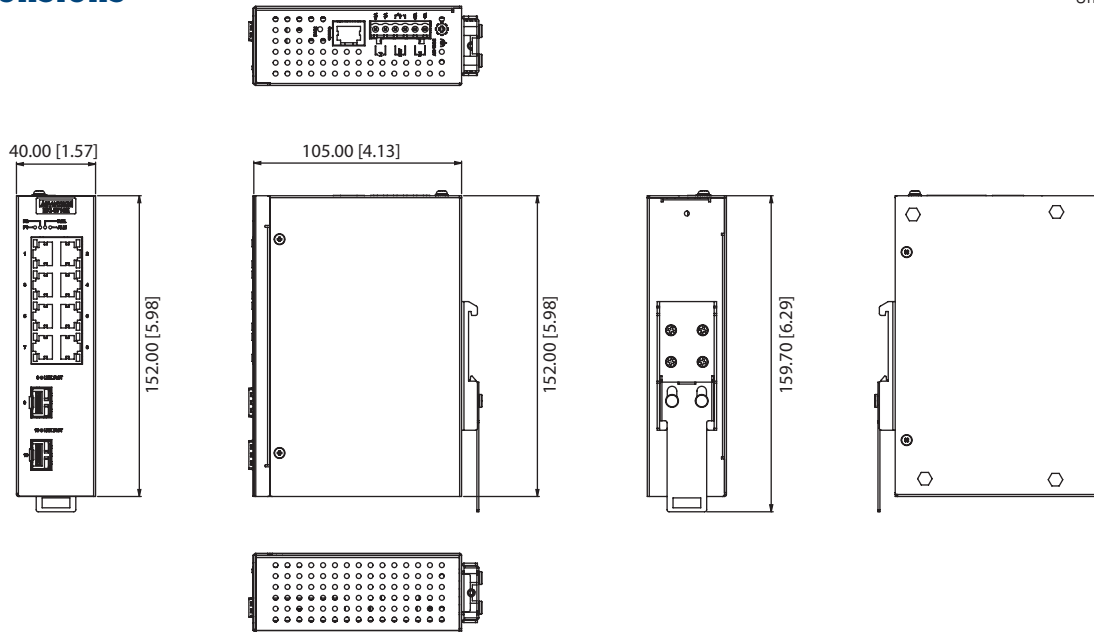

Panel Cut-out Dimensions (W x H x D): 40 x 152 x 105 mm (1.57 x 5.98 x 4.13 inch)

Switch Properties

- **Switch Capacity** 5.6Gbps
- **Transmission Rate** 4.17Mpps
- **MAC Table Size** 8K
- **Packet Buffer Size** 4.1Mb
- **Max. IGMP Group** 256
- **Max. VLAN Group** 256 (VLAN ID 1 – 4094)

L2 Features

- **VLAN Arrange** 802.1Q Tag-based VLAN, 802.1ad QinQ VLAN Stacking
- **Port Mirroring** 1 to 1, N to 1
Max. Mirror Session: 4
- **RSPAN** Remote Switched Port Analysis
- **GARP** GVRP, GMRP
- **IP Multicast** IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- **Storm Control** Broadcast, Multicast, Unknown unicast
- **LLDP** 802.1ab LLDP, LLDP-MED
- **Industrial Protocol** Modbus/TCP
- **Redundancy** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring Pro, with ultra high-speed recovery time less than 20ms, ERPS(G.8032)

QoS

- **Priority Queue Scheduling** WRR (Weighted Round Robin), SP (Strict Scheduling Priority) Hybrid Priority, Max. Priority Queues: 4
- **Class of Service** IEEE 802.1p Based CoS, IP TOS, DSCP based CoS
- **Rate Limiting** Ingress Rate limit, Egress Rate limit
- **Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

Security

- **Port Security** Static/Dynamic MAC, Max. Learning Limit, MAC Violation Notice
- **802.1X** Port-based/MAC-based Authentication (MD5/PEAP/TLS/TTLS Encryption)
- **MAB** MAC Authentication Bypass
- **Authentication** RADIUS, TACAS+
- **IP Security** DHCP Snooping, ARP Spoofing Prevention
- **ACL** Access Control List (IP-ACL, MAC-ACL)
Max. ACL Entries: 64

Management

- **DHCP** Client, Server, Option66/67/82, DHCP Relay
- **Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB-II, Private MIB, Ethernet-Like MIB, RMON MIB (Group 1, 2, 3, 9)
- **Security access** SSH2.0, SSL
- **Software upgrade** TFTP, HTTP, Dual Image
- **NTP** SNTP client

Ordering Information

- **EKI-5710E-I-A** 10FE Port Managed Ethernet Switch w/Wide Temp.
- **EKI-5710E-2FI-A** 8FE + 2 x SFP Port Managed Ethernet Switch w/Wide Temp.

*** This document is preliminary version and has not finalized, might be changed without notification.*

Note: For SFP copper module, EKI-5710 only supports its highest transmit rate

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.