

EKI-7428G-4CI

EKI-7428G-4CPI

24G+4G Combo port L2 Managed Switch

24G+4G Combo port L2 Managed PoE Switch



Features

- 24 x IEEE 802.3 af/at PoE Gigabit ports + 4 x Gigabit Copper/SFP combo ports, provide up to 30Watts per port
- SFP socket for Easy and Flexible Fiber Expansion
- Management: SNMP v1/v2c/v3, WEB, Telnet, Standard MIB
- IXM function enables fast deployment
- Security: 802.1x (Port-Based, MD5/TLS/TTLS/PEAP Encryption), HTTPS, SSH and SNMPv3
- Redundancy: Gigabit X-Ring Pro (ultra high-speed recovery time < 20 ms), RSTP/STP (802.1w/1D), MSTP
- 48V_{DC} power input (46-57 V_{DC} for POE af, 53 -57 V_{DC} is recommended for at) and 2 relay output
- 40 ~ 70°C wide-range operating temperature
- Support Security Pack to against internal and external cyber threats

Introduction

The EKI-7428G is an industrial-class layer 2 full managed switch including 24 Gigabit ports and 4 Gigabit combo ports. It is designed for rack-mount installation, and can be deployed in demanding industrial environments. It is suitable for edge to core industrial networks. It integrates Layer 2 switching software, which is optimized for scale and performance, delivering wire speed across all ports up to 56 Gbps for layer 2 traffic forwarding. In addition, the PoE design provides up to 30 watts per port to fulfill high power consumption device, moreover, it supports high reliability with -40 ~ 70°C operating temperatures, and dual 48 V_{DC} input power design ensure vital network capabilities with minimum downtime. It is also embedded with Advantech IXM, which benefits users by giving them fast deployment and can dramatically save engineer's time and costs.

Specifications

Communications

- Standard** IEEE 802.3, 802.3u, 802.3x, 802.3z, 802.1D, 802.1w, 802.1p, 802.1Q, 802.1X, 802.3ad, 802.3ab
- LAN** 10/100/1000Base-T (X), Optional 100Base-FX, 1000Base-SX/LX/LHX/XD/ZX/EZX
- Transmission Distance** Ethernet: Up to 100 m (4- wire Cat.5e, Cat.6 RJ45 cable suggested for Gigabit port)
SFP: Up to 110 km (depends on SFP)
- Transmission Speed** Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation
Gigabit Fiber: Up to 1000 Mbps

Interface

- Connectors** 24 x RJ45 (Ethernet)
4 x RJ45/SFP (mini-GBIC) combo ports
4-pin removable screw terminal (Power)
3-pin removable screw terminal (Relay)
- LED Indicators** 10/100T (X): Link/Activity, Duplex/Collision
Gigabit Copper: Link/Activity, Speed (1000 Mbps)
SFP: Link/Activity
- Console** RS-232 (RJ45)

Network Management


- Configuration** Web browser, Telnet, Serial console, TFTP, SNMPv1/v2c/v3, Port Speed/Duplex Configuration, IPv6
- Switching** Switching Capacity 56 Gbps
Forwarding Rate 41.6 Mpps
MAC Address 8K
Jumbo Frame 9K
VLAN Group 256 (VLAN ID 1 ~ 4094)
Packet Buffer 4.1 Mbit
- VLAN** IEEE 802.1Q, GVRP, Port-based VLAN
- Redundancy** Advantech X-Ring, 802.1w/1D/1s RSTP/STP/MSTP
- Security** IP Security, SSH, SSL, SNMPV3, HTTPS, IP Source Guard, DHCP Snooping, ARP Spoofing Prevention, 802.1X, TACACS+, Access Control List
- Traffic Control** IGMP Snooping/Query for multicast group management, Port Trunking, Static/802.3ad, LACP Rate limit and storm control, IEEE 802.1p QoS CoS/TOS/DSCP priority queuing, IEEE 802.3x flow control
- Diagnostics** Port Mirroring, Real-time traffic statistic, MAC Address Table, SNTP, Syslog, E-Mail Alert, SNMP Trap, RMON

Mechanism

- Enclosure** IP30, metal shell with solid mounting kits
- Dimensions (W x H x D)** 438 x 43.6 x 259.20 mm (17.24" x 1.72" x 10.2")
- Mounting** 1U 19" Rack mount

Dimensions

Unit: mm [inch]

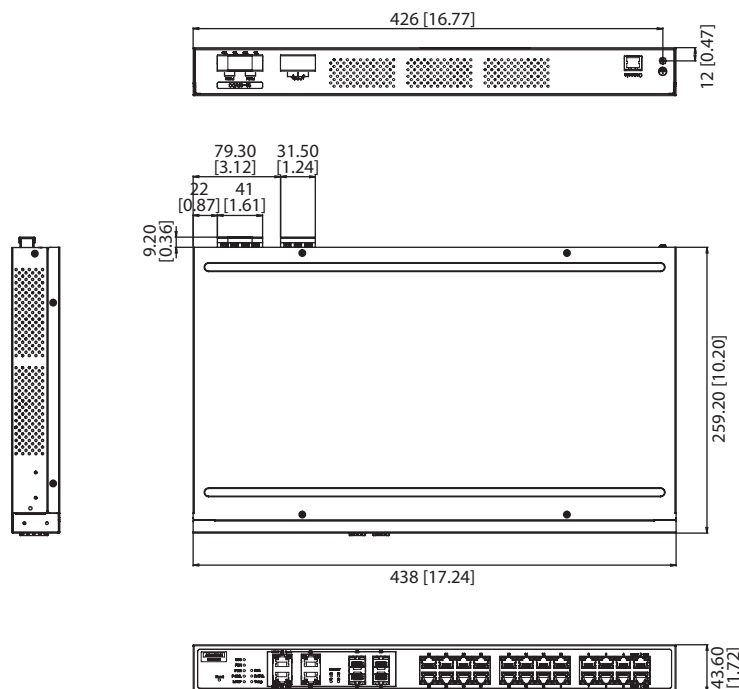

Power

- **Power Consumption** 20W @ 24V (EKI-7428G-4CI)
20W @ 48V (EKI-7428G-4CPI)
- **Power Budget** 685W (EKI-7428G-4CPI)
- **Power Input** EKI-7428G-4CI 12-48 V_{DC}
EKI-7428G-4CPI 48 V_{DC} (46 to 57 V_{DC}),
53 ~ 57 V_{DC} is recommended for 802.3at
- **Fault Output** 2 Relay Outputs

Protection

- **Power Reverse** Present
- **Overload Current** Present

Environment

- **Operating Temperature** -40 ~ 70°C (-40 ~ 158°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 10 ~ 95% (non-condensing)
- **MTBF** EKI-7428-4CI: 787,940 hours
EKI-7428G-4CPI: 424,517 hours

Certification

- **Safety** UL 61010-2-201
- **EMI** CE FCC EN55022 Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
IEC 60068-2-27
- **Shock** IEC 60068-2-32
- **Freefall** IEC 60068-2-6
- **Vibration** EN 50121-4
- **Railway Track Side** <http://www.advantech.com/legal/patent>
- **Patent**

Ordering Information

- **EKI-7428G-4CI-AE** 24GE+4G Combo Port Managed Ethernet Switch
w/ Wide Temp
- **EKI-7428G-4CPI-AE** 24G+4G Combo Port POE Managed Ethernet Switch
w/ Wide Temp

Note: For SFP copper type, only 1000Mbps supported.

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.