


PCIE-2711

Single Port Fiber 200GbE Ethernet PCI Express Server Adapter with NVIDIA® ConnectX®-6

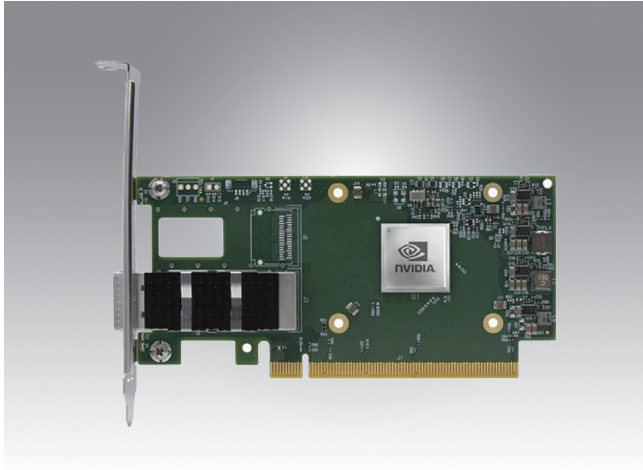

Features

- NVIDIA® ConnectX®-6 Dx Controller
- 1 200GbE QSFP56 ports
- PCIe Gen. 4 x16 host interface
- Low profile (half length) form factors
- Supports 200GBASE-SR4, 200GBASE-CR4 and 200GBASE-KR4 modules
- Supports SR-IOV based virtualization



Introduction

The PCIE-2711 built on NVIDIA® is a low-profile single port 200GbE Ethernet smart network interface cards (SmartNIC) based on the NVIDIA® ConnectX®-6 Dx Ethernet Controller that supports PCIe gen. 4. The SmartNIC supports up to one QSFP56 ports of 200GbE connectivity to deliver scalability, high performance, advanced security capabilities, and accelerated networking. With an SR-IOV or VirtIO interface, NVIDIA Accelerated Switch and Packet Processing technology (ASAP) offloads the software-defined networking (SDN) data plane to the SmartNIC, accelerating performance and offloading the CPU in virtualized or containerized cloud data centers.

PCIE-2711 is an ideal network interface solution for Enterprise data centers with Big data analytics, Cloud-native, web 2.0, hyperscale, Cybersecurity, network function virtualization (NFV), Machine learning and AI.

Specifications

Controller	Controller	NVIDIA® ConnectX®-6 Dx
	Physical Functions	8
	Virtual Functions	1K
Ethernet	PCI Express Lanes	x16
	Speed	Gen 4
	Port Number	1
	Ports	200GbE QSFP56
Networking	LAN Bypass	Not supported
Power	Voltage	+12V
	Watts	17W
Mechanical Design	Board Dimension (D x W)	142 x 68.9 mm
	Bracket	Full height and half height options available
Environment	Operating Humidity	0 to 90% (non-condensing)
	Operating Temperature	0 ~ 55 °C (32 ~ 131 °F)
	Storage	-40 ~ 70 °C (-40 ~ 158 °F)
Certification	EMC	CE / FCC / VCCI / ICES / RCM
Compatibility	OS Version	Win2022 / Win2019 / Win2016 / Win2012R2 / Win11 x64 / Win10 x64 / RedHat / CentOS

Ordering Information

Part Number	Description
PCIE-2711NP-MEA1E	Single Port Fiber 200GbE (QSFP56) Ethernet PCI Express Server Adapter with NVIDIA® ConnectX®-6 controller, PCIe gen. 4 x16

Please contact your Advantech representative for a list of supported and validated transceiver modules.

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.