


IDK-1105

5.7" VGA Industrial Display kit with Touch Solution

NEW

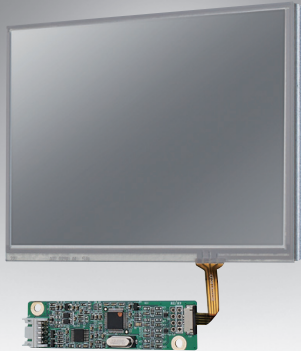

Features

- 5.7" LCD supports 640 x 480 pixels and wide operating temperature (-20 ~ 70 °C)
- IPS technology supports wide view angle
- Brightness of 500 cd/m² with LED backlight
- 4-wire resistive touch solution
- LVDS signal interface
- Low power consumption 2.1 Watt (panel only)
- LED driver board built in
- Touch controller included (USB)

Introduction

The Advantech IDK-1105 series comes with a 5.7" industrial grade LCD display with 4-wire resistive touch. The series is also available with flexible options for LCD screens enhanced treatment such as Anti-Reflection surface treatment and optical bonding solution. IDK-1105 series supports 4-wire resistive touch with low power consumption at the maximum of 2.1 Watt. IDK-1105 series is ideal for embedded applications which customers have maximum flexibility for mechanical design.

Specifications


Model No.	IDK-1105R-50VGB1	
LCD Panel	Display Size	5.7", 4:3
	Resolution	640 x 480
	Display mode	Normally black (IPS)
	Viewing Angle (U/D/L/R)	85°/85°/85°/85°
	Brightness	500 cd/m ²
	Backlight Life (hrs)	50,000
	Contrast Ratio	1200:1
	Response Time (ms)	50 ms
	Colors	6 Bit (262K)
	Voltage	3.3 V Power
	Consumption	2.1 Watt
	Signal Interface	1 channel LVDS
	Weight	230 g after touch
	Dimensions (W x H x D)	127.0 x 98.43 x 9.26 mm after touch
Touch Screen	Touch Screen	4-wire Resistive
	Transparency	82.5± 2.5%
	Surface Hardness	3H
	Durability	1 million times
Environment	Operating Temperature	-20 ~ 70 °C
	Storage Temperature	-30 ~ 80 °C
	Humidity	5 ~ 90% @ Max. 40 °C, non-condensing

No Color Shift




Dimensions

Unit: mm

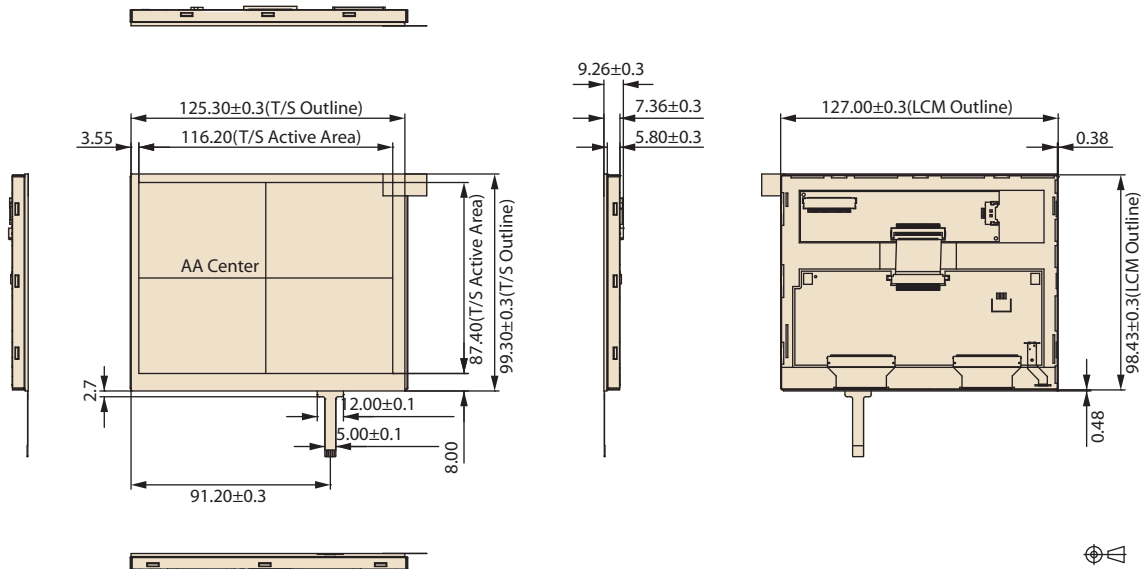

Touch Control Board

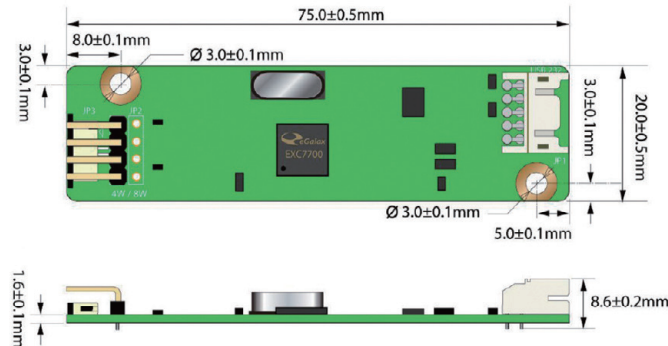

Ordering Information

Part No.	Size	LCD Brightness (cd/m ²)	Interface	Touch screen	Touch Interface
IDK-1105R-50VGB1	5.7"	500	1 channel LVDS	4-wire Resistive	USB

Packing List

Part Number	Description
ETM-RES05C-EEH4EE	1 x 4-wire USB Touch controller
1700020324-01	1 x USB Touch cable 5P-2.0/USB-A (M) 180CM

Note: Package contents are subject to change without prior notice

Optional Order

SBC Part No.	LVDS Cable Part No.	Display Interface	B/L Cable Part No	Touch Interface	Touch Power Input
MIO-2261	96CB-L2014PIAA	LVDS: Single channel 18bit	TBC	USB	5 V
MIO-5250	96CB-L2020PIA2	LVDS: Single channel 18bit	96CB-E0405PID3	USB	5 V
AIMB-214	96CB-L2040PIA4	LVDS: Single channel 18bit	96CB-E0405PID3	USB	5 V

For more compatible embedded board solution, please visit our Build Your display web page as bellow
<http://www.advantech.com/buildyourdisplay>

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.