


AIMB-279 B1

Mini-ITX Motherboard 12th/13th/14th Gen Intel® Core™ Processor (codename: Alder Lake-S/ Raptor Lake-S/ Raptor Lake-S Refresh)

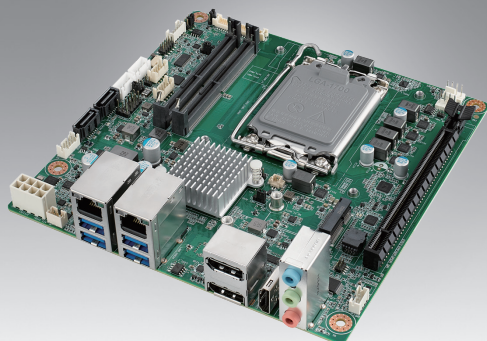

Features


- 12th/13th/14th Gen Intel® Core™ Desktop Processors, max. 24Core, support Q670E/H610E chipset
- Up to 96GB DDR5 5600MHz with two SODIMM
- PCIe x16 Gen4 (16GT/s)
- Four independent displays with 2 DP, 1 HDMI, 1eDP
- Rich expansion: 1 M.2 M key & 1 M.2 E key, 4 USB 3.2 & 2 USB2.0, 2 SATA
- 12~24V Power via ATX 8pin connector & 5VSB 3pin header
- WISE-DeviceOn and Embedded Software APIs

Windows 10 ubuntu WISE-DeviceOn CE FCC

Specifications

14th Generation Processors	CPU	i9-14900	i9-14900T	i7-14700	i7-14700T	i5-14500	i5-14500T	i5-14400	i5-14400T	i3-14100	i3-14100T
	Core Number	24	24	20	20	14	14	10	10	8	8
	Base frequency (GHz)	2.0/1.5	1.1/0.8	2.1/1.5	1.3/0.9	2.6/1.9	1.7/1.2	2.5/1.8	1.5/1.1	3.5/NA	2.7/NA
	Max Speed (GHz)	5.8/4.3	5.5/4.0	5.4/4.2	5.2/3.7	5.0/3.7	4.8/3.4	4.7/3.5	4.5/3.2	4.7/NA	4.4/NA
	Smart cache (MB)	36MB	36MB	33MB	33MB	24MB	24MB	20MB	20MB	12MB	12MB
13th Generation Processors	TDP (W)	65W	35W	65W	35W	65W	35W	65W	35W	65W	35W
	CPU	i9-13900E / i9-13900	i9-13900TE	i7-13700E / i7-13700	i7-13700TE	i5-13500E / i5-13500	i5-13500TE	i5-13400E / i5-13400	i3-13100E / i3-13100	i3-13100TE	
	Core Number	24	24	16	16	14	14	10	4	4	
	Base frequency (GHz)	1.8/2.0	1	1.9/2.1	0.8	2.4/2.6	1.3	2.4/2.5	3.3/3.4	2.4	
	Max Speed (GHz)	5.2/5.6	5	5.1/5.2	4.8	4.6/4.8	4.5	4.6	4.4/4.5	4.1	
12th Generation Processors	Smart cache (MB)	36	36	30	30	24	24	20	12	12	
	TDP (W)	65	35	65	35	65	35	65	60	35	
	CPU	i9-12900E / i9-12900	i9-12900TE	i7-12700E / i7-12700	i7-12700TE	i5-12500E / i5-12500/12400	i5-12500TE	i3-12100E / i3-12100	i3-12100TE	G7400E	G7400TE
	Core Number	16	16	12	12	6	6	4	4	2	2
	Base frequency (GHz)	2.3/2.4	1.1	2.1	1.4	2.9/3.0/2.5	1.9	3.2	2.1	3.6	3
Processor System	Max Speed (GHz)	5	4.8	4.8	4.7	4.5/4.6/4.4	4.3	4.2/4.3	4	NA	NA
	Smart cache (MB)	30	30	25	25	18	18	12	12	6	6
	TDP (W)	65	35	65	35	65	35	60	35	46	35
	Chipset	Q670E / H610E									
	BIOS	AMI EFI 256Mb SPI									
Expansion Slot	M.2	1 M-Key for SSD, 1 E-Key for Wireless connection									
	PCIe x16	PCIe x16 Gen4 (16GT/s) for discrete GPU card and storage devices									
Memory	Technology	Dual Channel DDR5, up to 5600 MHz (non-ECC)									
	Max. Capacity	96GB (up to 48GB per SODIMM)									
	Socket	2 x 262pin SODIMM									
Graphics	Controller	Intel® UHD Graphics Driven by Xe Architecture									
	HDMI	HDMI2.0b, supports max. resolution 4096 x 2160 @ 60 Hz									
	DP	2 DP++, DP1.4a, supports max. resolution 4096 x 2304 @ 60 Hz									
	eDP	By option, with internal pin header, supports max. resolution 4096 x 2304 @ 60 Hz									
	LVDs	By default, internal pin header, supports single/dual channel 18/24-bit with maximum resolution up to 1920 x 1200 @ 60 Hz (eDP colay with LVDs)									
Network	Multi Displays	up to 4 independent displays (4 with Q670E)									
	ETHERNET	up to 2500 Mb/s									
	Controller	LAN1: Intel i219 (GbE) LAN2: Intel i226 (2.5GbE)									
SATA	Connector	2 x RJ45									
	Max data transfer rate	600 MB/s									
Rear I/O	Channel	2 x SATAIII									
	DP	2									
	HDMI	1									
	Ethernet	2									
	USB	2 ports USB3.2 Gen2(10Gbps) 2 ports USB3.2 Gen1(5Gbps)									
Internal Connector	Audio	1 (Line in/Line out/Mic in)									
	USB	2 ports USB2.0									
	LVDs/eDP	1 (LVDs colay with eDP)									
	Serial	2 ports (COM1 RS232, COM2 RS232/422/485)									
	SATA	2									
	M.2	1 M-key (dimension: 2242) 1 E-key (dimension: 2230)									
	GPIO	8-bit									
Watchdog Timer	Output	System reset									
	Interval	Programmable 1 ~ 255 sec/min									
Power Requirements		ATX 8pin connector+ 5VSB 3 Pin Header									
Environment	Temperature	Operating: 0 ~ 60° C (32 ~ 140° F), depends on CPU speed and cooler solution									
	Storage	Non-Operating: -40 ~ 85° C (-40 ~ 185° F)									
Physical Characteristics	Dimensions	170 mm x 170 mm (6.69" x 6.69")									

Block Diagram

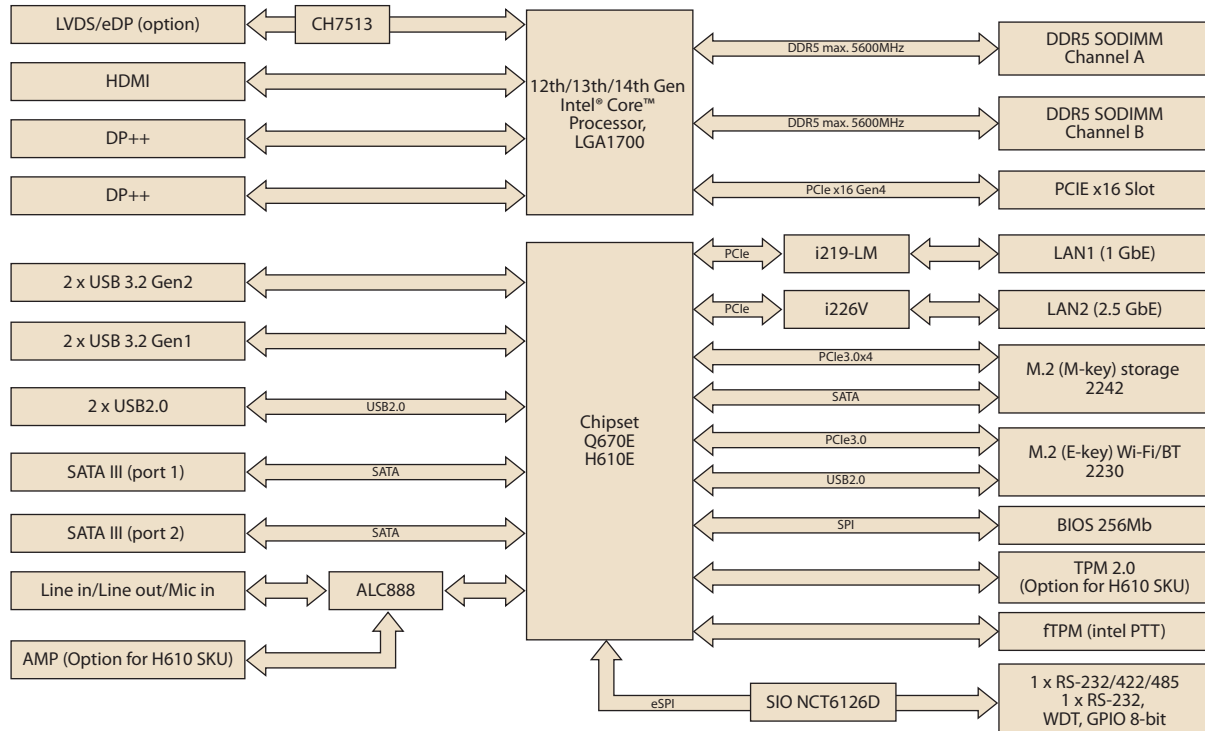

Ordering Information

P/N	Chipset	HDMI	DP	LVDS/eDP	GbE	2.5GbE	COM	SATAIII	USB3.2	USB2.0	M.2 M key	M.2 E key	PCIex16	TPM	AMP
AIMB-279QF-LDB1	Q670E	1	2	1/(1)	1	1	2	2	4	2	1	1	1	1	1
AIMB-279QF-EDB1	Q670E	1	2	(1)/1	1	1	2	2	4	2	1	1	1	1	1
AIMB-279HL-LDB1	H610E	1	1/(1)	1/(1)	1	1	2	2	4	2	1	1	1	(1)	(1)
AIMB-279HL-EDB1	H610E	1	1/(1)	(1)/1	1	1	2	2	4	2	1	1	1	(1)	(1)

*() Supports by BOM options

Packing List

P/N	Description	Quantity
AIMB-279 Board	AIMB-279 B1 motherboard	1
1700034404-01	1-to-1 serial port cable, 50cm	1
1700003194	SATA HDD cable	1
1700018785	SATA PWR cable	1
1960115633T001 (279Q)	I/O port bracket	1
1960115633T002 (279H)		
19350304A0	M.2 screws (M3, L=4mm)	2
1700023082-11	ATX cable 3P-2.0 15cm	1

Optional Accessory

P/N	Description
1970005672T001	LGA1700 CPU Cooler (for CPU TDP <= 35W), H: 32mm
1970005349T001	LGA1700 CPU Cooler (for CPU TDP <= 65W), H: 56.5mm
1700034405-01	1-to-2 USB cable, 50cm

Embedded OS / API

OS/API	Part No.	968 P/N	Description
Windows 10	20706WX1HS0080	968QW21HLE	img W10 21HL AIMB-279 64b 21H2 ENU
Windows 10	20706WX1VS0079	968QW21VLE	img W10 21VL AIMB-279 64b 21H2 ENU
Windows 10	20706WX1ES0080	968QW21ELE	img W10 21EL AIMB-279 64b 21H2 ENU
Windows 11	20706WLE1S0019	968QW1124ELOXE	img W11 24EL AIMB-279 64b 24H2 ENU
Windows 11	20706WLH1S0019	968QW1124HLOXE	img W11 24HL AIMB-279 64b 24H2 ENU
Windows 11	20706WL1S0019	968QW1124VLOXE	img W11 24VL AIMB-279 64b 24H2 ENU
Ubuntu22.04	20706U22DS0035	968MOU204D	img UbuntuD AIMB-279 64b 22.04 ENU

Optional Chassis

PN	Description
EPC-B2000-A030	Mini-ITX Chassis with 350W ATX power supply

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.