

MIO-5154

Intel® Core™ i3-N305 Processor, Intel® Processor N-series 3.5" SBC (Code name: Alder Lake N)

NEW



Windows 10

WISE-DeviceOn iManager



Specifications

Platform	Processor	i3-N305	N97	N50
	Max. Frequency	3.80 GHz	3.60 GHz	3.40 GHz
	Base Frequency	TBU	TBU	TBU
	Core/Thread	8/8	4/4	2/2
	LLC	6MB	6MB	6MB
	CPU TDP	15W	12W	6W
	Chipset	Intel 300 Series Chipset (SoC Integrated)		
	BIOS	AMI EFI 256Mbit		
Memory	Technology	DDR5-4800		
	Max. Capacity	Up to 16GB		
	Channel/Socket	Single Channel / One Socket		
	IB ECC	Yes	Yes	Yes
Graphics	Controller	Intel® UHD Graphics		
	Max. Frequency	1.25 GHz	1.20 GHz	750 MHz
	Execution Unit	32	24	16
	3D/HW Acceleration	DX12, OGL4.0, OCL1.2, HW Encode: HEVC/H265, AVC/H264, VP9, HW Decode: HEVC/H265, AVC/H264, VP9		
Display I/F	LCD	1 x LVDS, Dual Channel 18/24-bit, up to 1920 x 1080		
	HDMI/DP	1 x HDMI 2.0, up to 4096 x 2160 x 24bpp@48-60Hz 1 x DP1.4a, up to 4096 x 2304 x 36bpp@60Hz		
	Triple Display	3 simultaneous displays by LVDS + HDMI + DP		
Ethernet	Controller	LAN: Realtek RTL8111K		
	Speed	2 x GbE		
External I/O	Ethernet	2 x RJ-45		
	VGA/HDMI/DP	-/1/1		
	USB3.2/USB2.0	2/2		
Internal I/O	SATA	1 x SATA GenIII 6.0Gbps		
	USB3.0	2		
	Serial Bus	I2C(Optional to SMBus)		
	COM Port	2 x RS-232/422/485, 4 x RS-232		
	GPIO	8-bit general purpose input output I/O		
	Audio	Realtek ALC888s, Line-in/Line-out/MIC		
	Inverter	5V @2A		
	Smart Fan	12V, 2A (4-wire)		
	Front Panel Control	Power-on, Reset, Buzzer, SATA LED, Power LED, Case Open		
Board Feature	Watchdog Timer	65536 level, 0-65535 sec		
	TPM	fTPM support by Intel® Platform Trust Technology Discrete TPM2.0 (*optional)		
	iManager 3.0	SW API for Hardware Monitor, Smart Fan Control, Brightness Control, I2C, GPIO, WDT		
	M.2 E-Key	1 x E-Key 2230 (PCIe x1, USB2.0)		
Expansion	M.2 B-Key	1 x B-Key 2280 (SATA or PCIe x1)		
		1 x B-Key 3052 (USB3.2, USB 2.0 or *optional PCIe x1) w/ Nano-SIM		
Power	Supply Voltage	Vin: DC 12V ± 10%; RTC Battery: Lithium 3V/210mAh, support w/o CMOS Battery		
	Connector	ATX 2x2pin 90D, optional ATX 2x2pin 180D or DC Jack		
	Power Management	AT, ATX		
	Max. Consumption	30.57W (12V)	27.88W (12V)	18.65W (12V)
Environment	Idle Consumption	9.93W (12V)	10.36W (12V)	9.21W (12V)
	Temperature	Operating: Standard: 0 ~ 60 °C (32 ~ 140 °F) with 0.7m/s airflow Storage: -40 ~ 85 °C (-40 ~ 185 °F)		
	Humidity	Operating: 40 °C @ 95% relative humidity, non-condensing Storage: 60 °C @ 95% relative humidity, non-condensing		
	Vibration Resistance	3.5 Grms		
Certification	EMC	CE, FCC Class B, ESD 8KV/15KV Criteria A		
Mechanical	Dimensions	146 x 102 mm (5.7" x 4")		
	Net Weight	145g		

*Note: Support by request

ADVANTECH

MIO Extension SBCs, Modules and Chassis

All product specifications are subject to change without notice.

Last updated: 3-Jan-2025

Features

- Intel® Core™ i3-N305, N-series N97 and N50
- DDR5-4800 up to 16GB
- 3 independent display: LVDS + HDMI + DP
- Dual GbE, 6 USB, 6 COM, SMBus/I2C
- Expansion: M.2 E-Key 2230, M.2 B-Key 2280 & 3052
- Supports iManager & Software APIs, WISE-DeviceOn


Software APIs:



Utilities:



Block Diagram

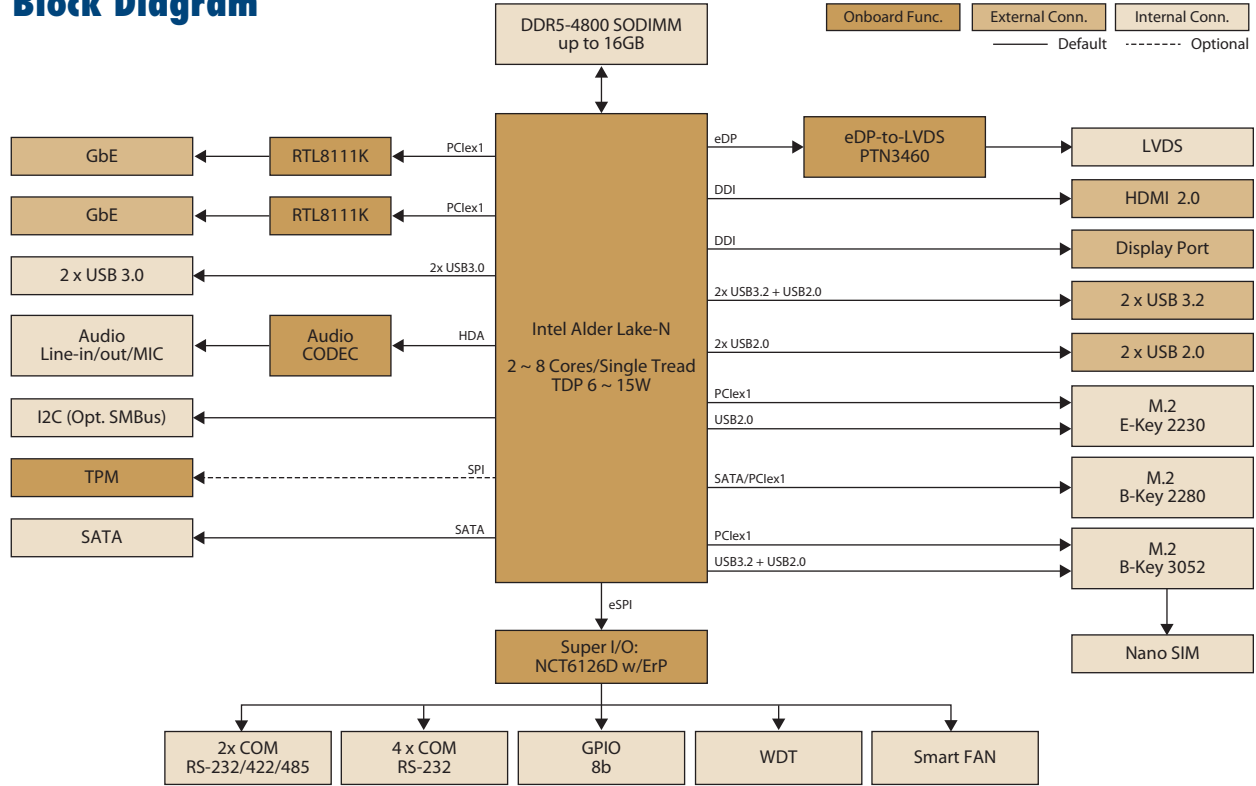

Ordering Information

Part No.	CPU	TDP	Max. Frequency	Core	Display Port	External USB 3.2	Internal USB 3.0	RS232/422/485	RS232	Cable kits	Thermal Solution	Operating Temperature
MIO-5154C3-P8A1	i3-N305	15W	3.80 GHz	8	Y	Y	Y	2	4	Y	Passive	0 ~ 60 °C
MIO-5154N-P6A1	N97	12W	3.60 GHz	4	Y	Y	Y	2	4	Y	Passive	0 ~ 60 °C
MIO-5154N-P4A1	N50	6W	3.20 GHz	2	Y	Y	Y	2	4	Y	Passive	0 ~ 60 °C
MIO-5154NL-P6A1	N97	12W	3.60 GHz	4	N	Y	N	1	3	COM cable*2 only	Passive	0 ~ 60 °C

Packing List

Part No.	Description	Quantity
	MIO-5154 SBC	
	Startup Manual	
1700006291	SATA cable 30cm	1
17000031583-01	A CABLE SATA 15P/1*2P-2.0 35cm	1
1700032181-01	M Cable 2x10P-2.0/USB-A 9P(F)x2 35CM	1
1700030404-01	RS-232 9P(M)/1*10P-1.25 20cm	2
1700019584-01	A Cable 2*5P-2.0/Audio JACK*3 20cm	1
1970005854T001	MIO-5154 15W/12W CPU Heatsink	1
1960064228T021	MIO-5154 6W CPU Heatsink	1

Rear I/O View



Optional Accessories

Part No.	Description
1970005925T001	MIO-5154 CPU Heatspreader
1970005931T001	MIO-5154 CPU Active Cooler

Embedded OS/API

OS	Part No.	Description
Windows 10 LTSC	20706WX1ES0086	Win10 IOT Ent. 2021 LTSC 64bit, Entry: N97 & N50
	20706WX1VS0086	Win10 IOT Ent. 2021 LTSC 64bit, Value: Core i3
	20706WX1HS0086	Win10 IOT Ent. 2021 LTSC 64bit, High End
Windows 11 LTSC	20706WLE1S0003	Win11 IOT Ent. 2024 LTSC 64bit, Entry: N97 & N50
	20706WLV1S0003	Win11 IOT Ent. 2024 LTSC 64bit, Value: Core i3
	20706WLH1S0003	Win11 IOT Ent. 2024 LTSC 64bit, High End
Ubuntu 22.04 LTS Software API	20706U22DS0042	Download by website

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.