


ROM-2820

NXP i.MX 93 Cortex®-A55 OSM 1.1 Computer-on-Module



Introduction


Advantech ROM-2820 OSM 1.1 Computer-on-Module is powered by NXP i.MX 93 SoC which includes Cortex-A55 Dual-core in combination with one Cortex-M33 real time processor, Ethos®-U65 Neural Processing Unit (NPU) and 2D graphics engine. It provides USB2.0, Gigabit Ethernet, MIPI-CSI, I2C, SPI, GPIO, CAN-FD and MIPI DSI display for embedded applications.

ROM-2820 is paired with Advantech OSM carrier board for faster end product peripheral integration and time-to-market. The reference schematics and layout checklists documentations for carrier board development will be provided along with the open-sourced Linux BSP, test utilities, hardware design utilities and reference drivers.

Specifications

Form Factor		OSM 1.1
Processor System	CPU	NXP i.MX 93 Cortex-A55 Dual-core (up to 1.7GHz)
	MCU	1 x Arm Cortex-M33 core
Memory	Technology	1 x 2GB LPDDR4X up to 3733MT/s
	Capacity	1 x On-board 2GB
	Flash	1 x 16 GB eMMC NAND Flash for O.S
Graphics	LVDS/MIPI DSI	1 x 4 lane MIPI-DSI, 1 x single channel LVDS (Display Output, either one)
	HDMI	-
	Parallel RGB	-
	VGA	-
	Graphics Engine	NXP integrated 2D Graphic Acceleration
Ethernet	Chipset	2 x NXP i.MX 93 integrated RGMII
	Speed	2 x 10/100/1000 Mbps
RTC	RTC	External RTC
Security		NXP i.MX 93 integrated Trust Zone
I/O	PCIe	-
	SATA	-
	USB	2 x USB 2.0
	Audio	1 x I²S
	SPDIF	-
	SDIO	1
	Serial Port	2 x 4-wire UART; 2 x 2-wire UART; 1 x 2-wire UART for debug console
	SPI	1
	CAN-FD	2
	GPIO	16
	QSPI	N/A
	I²C	2 + 2 (dedicated to LVDS/MIPI-CSI)
	Camera Input	1 x 2-lane MIPI-CSI
	PWM	2
	Touch	-
	ADC	2
Power	Power Supply Voltage	5V
	Power Consumption	Max. Load: 2.1 watt; Idle mode: 0.03 watt
Environment	Operating Temperature	0 ~ 60 °C / -40 ~ 85 °C
	Operating Humidity	95% @ 40° C (non-condensing)
Mechanical	Dimensions (W x D)	45 x 45 mm
Operation System		Yocto Linux
Certifications		CE/FCC Class B

Block Diagram

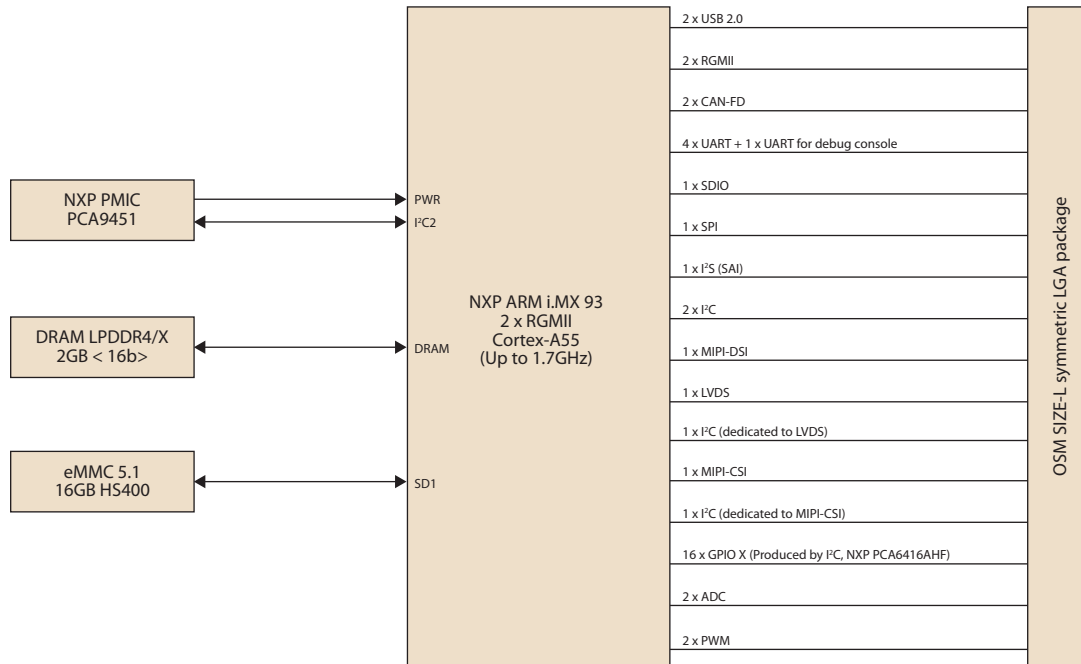

Ordering Information

Part No.	CPU	Memory	Flash Memory	UART	LAN	USB 2.0	Display	Size	Power input	Operating Temperature
ROM-2820WD-REA1E	i.MX 93 Dual Core	2GB	16GB	5	2	2	1 x MIPI-DSI or LVDS	45 x 45 mm	5V	-40 ~ 85 °C
ROM-2820CD-REA1E	i.MX 93 Dual Core	2GB	16GB	5	2	2	1 x MIPI-DSI or LVDS	45 x 45 mm	5V	0 ~ 60 °C

Development Board


Part No.	Description
ROM-DK2820-F1A1E	ROM-2820 evaluation kit

Optional Accessories

Part No.	Description
1701100300	Debug port cable
1700019474	D-SUB 9P(F)/D-SUB 9P(F) RS232/RS485 100c
96PSA-A36W12R1-3	ADAPTER 100-240V 36W 12V 3A
1700001524	Power Cord 3P UL 10A 125V 180cm
170203183C	Power Cord 3P Europe (WS-010+WS-083) 183cm
1700019146	Power Cord CCC 3P 10A 250V 183cm
170203180A	Power Cord 3P UK 2.5A/3A 250V 1.83M
1700008921	Power Cord 3P PSE 183cm
SQF-ISDM1-16G-21C	SQF SD Card I-SD UHS-I MLC 16G (0~70°C)
SQF-ISDM1-16G-21E	SQF I-SD UHS-I MLC 16G (-40~85°C)

Dimensions


Unit: mm

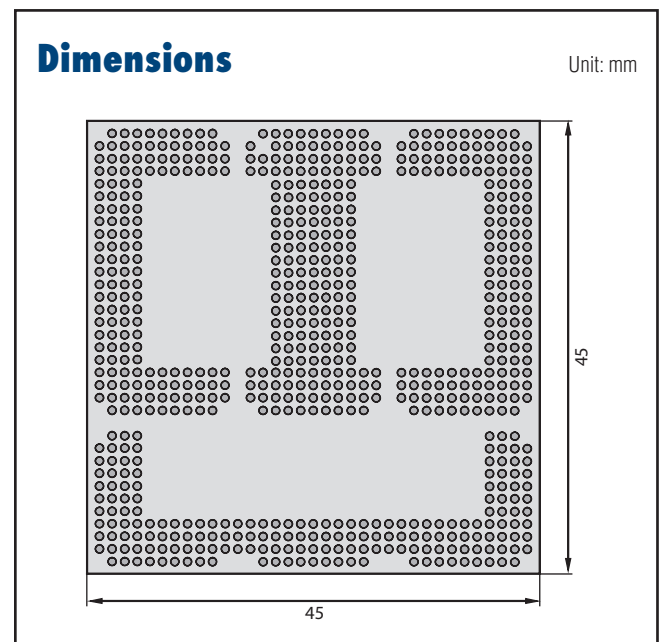

Embedded Linux Support and Design-in Services

Hardware Certified Ubuntu and Yocto with Eco Partner Services

Linux is the most popular embedded OS for transportation, outdoor services, factory automation, and mission critical applications. Its open source and kernel reliability features ease security updates, and make it particularly adaptable to new AI and Edge computing technology. Advantech has cooperated with Canonical and other software partners to provide hardware certified Ubuntu image and Yocto BSP as Linux offerings. The Advantech, Embedded Linux, and Android Alliance (ELAA) delivers local software services and consultation.

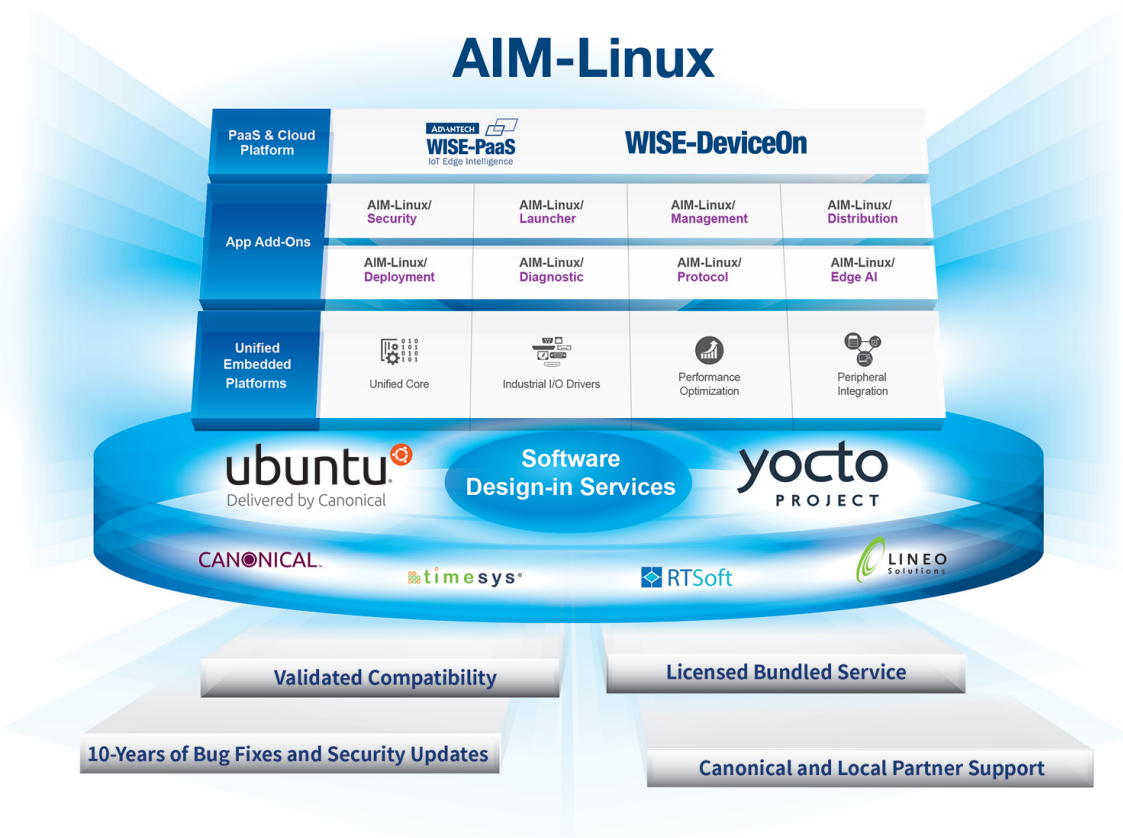

Features

Certified OS and BSP	Licensed Services	Numerous AI and Edge Resources	Local Partner Alliance
- Platform compatibility tests - Preloaded functional driver and software stacks	- License authorized Canonical delivers 10-years of bug fixes and security updates - In-house bundled service	- Containerized technology for service provision and deployment - AI resources from Caffe, TensorFlow, and mxnet	Embedded Linux and Android Alliance (ELAA)

WISE-DeviceOn

Massive IoT Device Management Utility

IoT deployment and management typically involves numerous disparate devices installed on multiple sites. These devices require effective monitoring, managing, and tracking. Advantech's easy-to-use WISE-DeviceOn interface enables users to remotely monitor device health, troubleshoot problems, and send software/firmware updates over-the-air (OTA). In sum, DeviceOn empowers quick real-time responsiveness to emerging problems.



Features

Comprehensive Management

- Devices status
- Peripherals/firmware
- Open for extension

Remote Access

- Real-time monitoring
- Remote controls
- Troubleshooting

Efficient Operations

- Zero-touch on-boarding
- OTA updates
- Batch control

Product Highlights



SOM-6883

High-performance 11th Gen Intel®
COMe Type 6 Module



MIO-5375

Compact 11th Gen Intel® Outdoor
Focused 3.5" SBC



EPC-B5587

10th Gen Intel® Xeon® based Edge
server



EPC-R3220

Arm based IoT Edge Gateway

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při
objednávce nad 10 000 Kč bez DPH
nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače
s možností jejího prodloužení
až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují
za nižší ceny. Výše slevy se odvíjí
od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme
rozšířenou podporu a servis s garancí
výměny zařízení do 48 hodin.