


SOM-5885

Intel® 14th Gen Core Processors (Code Name: Meteor Lake U/H) COM Express® Basic Type 6 Module

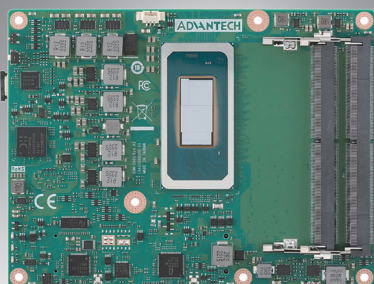

Features

- COM Express® R3.1 Basic Module Type 6 Pinout
- Intel® 14th Gen Core Processors , Up to 14C/20T
- Intel Xe LPG graphic up to 128EU, 4 independent 4K display
- Dual-CH DDR5 5600MT/s up to 96GB SODIMM
- Multiple I/O expansion: 2.5GbE, PCIe gen4, USB4 & USB3.2 Gen2, SATA3.0
- Support Dual BIOS failsafe
- Supports iManager, Embedded Software APIs and Wise-DeviceOn


Software APIs:



Specifications

Form Factor	Form Factor	COM Express Basic						
	Pin-out Type	COM Express R3.1 Type 6 compatible						
Processor System	CPU	Core Ultra 7 165H	Core Ultra 7 155H	Core Ultra 5 125H	Core Ultra 7 165U	Core Ultra 7 155U	Core Ultra 5 125U	
	Base Frequency (P/E-core)	1.4GHz/0.9GHz	1.4GHz/0.9GHz	1.2GHz/0.7GHz	1.7GHz/1.2GHz	1.7GHz/1.2GHz	1.3GHz/0.8GHz	
	Max Turbo Frequency (P/E-core)	5GHz/3.8GHz	4.8GHz/3.8GHz	4.5GHz/3.6GHz	4.9GHz/3.8GHz	4.8GHz/3.8GHz	4.3GHz/3.6GHz	
	Cores (P+E+LPE)	16C (6P+8E+2LPE)	16C (6P+8E+2LPE)	14C (4P+8E+2LPE)	12C (2P+8E+2LPE)	12C (2P+8E+2LPE)	12C (2P+8E+2LPE)	
	LLC	24MB	24MB	18MB	12MB	12MB	12MB	
	Default TDP	45W	45W	45W	28W	28W	28W	
	cTDP	20W-45W	20W-45W	20W-45W	12-28W	12W-28W	12W-28W	
	vPro	Intel vPro® Enterprise	Intel vPro® Essentials	Intel vPro® Essentials	Intel vPro® Enterprise	Intel vPro® Essentials	Intel vPro® Essentials	
	BIOS	AMI UEFI 256Mbit						
Memory	Technology	DDR5						
	Speed	5600 MT/s						
	Max. Capacity	Up to 96GB						
	Channel/Socket	Dual Channel / 2 Sockets SODIMM, 1DPC						
	ECC Support	IB ECC						
Graphics	Controller	Intel® Xe LPG Graphics						
	Graphics EU	128EU	128EU	112EU	64EU	64EU	64EU	
	Max. Frequency	2.3GHz	2.25GHz	2.2GHz	2.0GHz	1.95GHz	1.85GHz	
	3D/HW Acceleration	HW Encode: Supports AVC/H264, JPEG, HEVC/H265, VP9 and AV1. HW Decode: Supports MPEG2, AVC/H264, JPEG/MJPEG, HEVC/H265, VP9 and AV1						
Display	LCD (LVDS/eDP)	1port LVDS Dual channel: 1920 x 1200 @60Hz/eDP 4096 x 2304 @60Hz						
	DDI (HDMI/DisplayPort)	3 DDI Port Support Configurable HDMI/DisplayPort -HDMI 2.1: 4096 x 2304 @ 60Hz -DisplayPort 2.1 HBR3: 4096 x 2304 @ 60Hz						
	Multiple Display	Quad Simultaneous Independent Display						
Expansion	PEG	PEG (H series): PCIe Gen4, 16 lanes, Bifurcate to 1 x8, 2 x4 PEG (U series): PCIe Gen4, 8 lanes, Bifurcate to 2 x4						
	PCI Express	PCIe: PCIe gen4, Up to 8 lanes & Up to 8 end devices -4 PCIe Gen4 lanes, Bifurcate to x1, x2, x4 -Default 4 PCIe Gen4 & Gen3 lanes which support x1 only (Option with 2 SATA & PCIe Switch, Support PCIe x4 bifurcate to x1, x2, x4)						
Serial Bus	SMBus	Yes						
	I2C Bus	Yes						
Ethernet	Gigabit	Intel I226 controller; Speed: 10M / 100M / 1000M / 2.5G speeds						
I/O	SATA3.0	Up to 2 Ports (6Gbps), Configurable by 4 lanes [0,2]/[1,3]						
	USB4	Up to 2 ports, Co-lay with DDI, Support by SOM-M20						
	USB3.2 (Gen2)	4 Ports (10 Gbps)						
	USB2.0	8 Ports (480 Mbps)						
	SPI Bus	Yes. For BIOS EEPROM, Support Dual BIOS failsafe						
	GPIO	8-bit, Default from iManager, Option from CPU						
	LPC	Yes						
	Audio Interface	HD Audio						
	Watchdog	65536 level, 0 ~ 65535 sec						
	COM Port	2 Ports (2-Wire)						
Power	TPM	TPM2.0						
	CAN Bus	Support one CAN Bus option from COM Port						
	Type	ATX: Vin, VSB; AT: Vin						
	Supply Voltage	Vin: 8.5V ~ 20V; VSB: 4.75V ~ 5.25V; RTC Battery: 2.0V ~ 3.3V						
	Power Consumption (Max.)	TBD						
Environment	Power Consumption (Idle)	TBD						
	Operating Temperature	Standard: 0 ~ 60 °C (32 ~ 140 °F)						
	Storage Temperature	-40 ~ 85 °C (-40 ~ 185 °F)						
	Humidity	Operating: 40°C@95% relative humidity, non-condensing Storage: 60°C@95% relative humidity, non-condensing						
	Vibration Resistance	3.5 Grms						
Mechanical	Dimensions	125 mm x 95 mm (4.92" x 3.74")						

Block Diagram

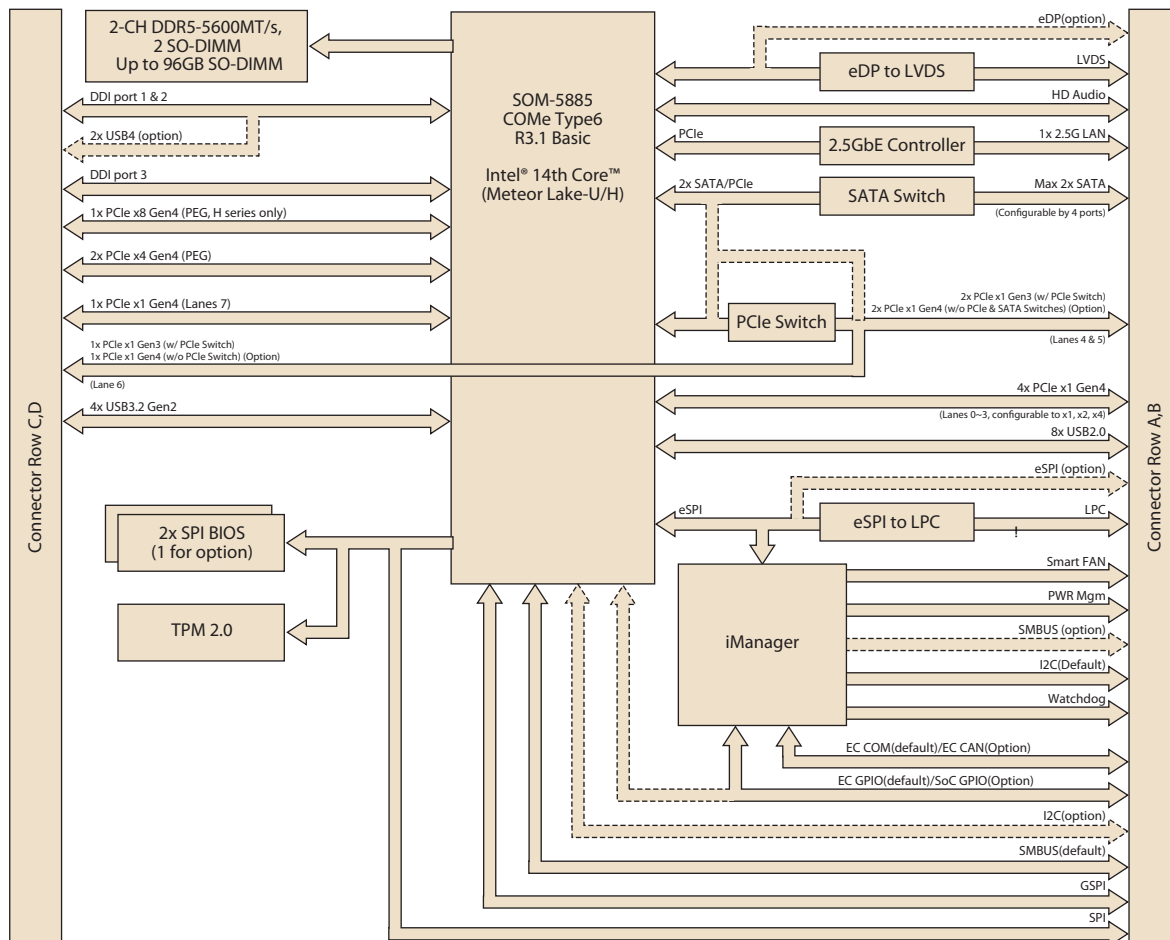

PCIe configuration

	PEG	PCIe	SATA
Configuration 1 (With PCIe switch)	1x PCIe x8 Gen4 (H series only) 2x PCIe x4 Gen4	4x PCIe x1 Gen4 (x1, x2, x4) 1x PCIe x1 Gen4 3x PCIe x1 Gen3	2x SATA3
Configuration 2 (Without PCIe switch)	1x PCIe x8 Gen4 (H series only) 2x PCIe x4 Gen4	4x PCIe x1 Gen4 (x1, x2, x4) 2x PCIe x1 Gen4	2x SATA3
Configuration 3 (Without PCIe switch)	1x PCIe x8 Gen4 (H series only) 2x PCIe x4 Gen4	8x PCIe x1 Gen4 (x1, x2, x4)	N/A

Ordering Information

Part No.	CPU	Cores (P+E+LPE)	Default TDP	cTDP	Base Freq.	Max. Turbo Freq.	LLC	DDR5 SODIMM	PCIe Switch	IBECC	Thermal Solution	Operating Temp.
SOM-5885C7HV-S4A1	Core Ultra 7 165H	16C (6P+8E+2LPE)	45W	20W-45W	1.4GHz/0.9GHz	5GHz/3.8GHz	24MB	Non-ECC	Yes	Yes	Active	0~60°C
SOM-5885C7H-S4A1	Core Ultra 7 155H	16C (6P+8E+2LPE)	45W	20W-45W	1.4GHz/0.9GHz	4.8GHz/3.8GHz	24MB	Non-ECC	N/A	Yes	Active	0~60°C
SOM-5885C5H-S2A1	Core Ultra 5 125H	14C (4P+8E+2LPE)	45W	20W-45W	1.2GHz/0.7GHz	4.5GHz/3.6GHz	18MB	Non-ECC	N/A	Yes	Active	0~60°C
SOM-5885C7UV-S7A1	Core Ultra 7 165U	12C (2P+8E+2LPE)	28W	12W-28W	1.7GHz/1.2GHz	4.9GHz/3.8GHz	12MB	Non-ECC	N/A	Yes	Active	0~60°C
SOM-5885C7U-S7A1	Core Ultra 7 155U	12C (2P+8E+2LPE)	28W	12W-28W	1.7GHz/1.2GHz	4.8GHz/3.8GHz	12MB	Non-ECC	N/A	Yes	Active	0~60°C
SOM-5885C5U-S3A1	Core Ultra 5 125U	12C (2P+8E+2LPE)	28W	12W-28W	1.3GHz/0.8GHz	4.3GHz/3.6GHz	12MB	Non-ECC	N/A	Yes	Active	0~60°C

Any other SKUs or combination is project based support. Please contact sales for details.

Development Board

Part No.	Description
SOM-DB5830-00A3	COMe Devel. Board COMe R3.1 Type6 pin-out (LVDS) 0 ~ 60 °C
SOM-DB5830A-00A3	COMe Devel. Board COMe R3.1 Type6 pin-out (eDP) 0 ~ 60 °C

Optional Accessories

Part No.	Description
1970005036T001	Semi-Cooler 125 x 95 x 33.2 mm with 12V Fan
1970005940T001	QFCS 125x95x26.2mm

Embedded OS

OS	Part No.	Description
Win10	20706WX1HS0106	img W10 21HL SOM-5885 64b 21H2 ENU
Win10	20706WX1VS0106	img W10 21VL SOM-5885 64b 21H2 ENU
Win10	20706WX1ES0106	img W10 21EL SOM-5885 64b 21H2 ENU

Packing List

Part No.	Description	Quantity
-	SOM-5885 COM module	1
1970005918T001	Heatspreader	1

Memory AVL List

Vendor	PN	Speed	Capacity
ADATA	AD5S560048G-B	5600 MT/s	48GB
ADATA	AQD-SD5V32GN56-SB	5600 MT/s	32GB
Advantech	SQR-SD5N32G5K6HNAB	5600 MT/s	32GB
Advantech	SQR-SD5N32G5K6MNDB	5600 MT/s	32GB
Advantech	SQR-SD5N32G5K6SNPB	5600 MT/s	32GB
Apacer	D22.35305S.001	5600 MT/s	32GB
Hynix	HMCG88AGBSA095N2	5600 MT/s	32GB
Micron	MTC8C108YS1SC56BB1	5600 MT/s	24GB
Micron	MTC16C2085S1SC56BD1	5600 MT/s	32GB
Samsung	M425R4GA3PB0-CWMOD	5600 MT/s	32GB

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.