

# IPC-610-P

## 4U Rackmount Chassis with High Wattage Power Supply

NEW



### Features

- With 850W or 1200W ATX 3.1 power supply
- Dual front-access cooling fans provide optimized and streamlined airflow
- Shock-resistant disk drive bay holds up to three 5.25" and one 3.5" disk drives
- Front-access USB interface for easy data transfer
- Front LEDs indicate power status, and HDD activity


CE FCC

### Specifications


|                          |                        |                                              |                                  |
|--------------------------|------------------------|----------------------------------------------|----------------------------------|
| Drive Bay                |                        | External                                     |                                  |
|                          | 3.5"                   | 1*                                           |                                  |
| Cooling                  | Fan                    | 2 (12 cm / 82 CFM each)                      |                                  |
|                          | Air Filter             | Yes                                          |                                  |
| Front I/O Interface      | USB                    | 2                                            |                                  |
| Miscellaneous            | LED Indicators         | Power and HDD                                |                                  |
|                          | Rear Panel             | Five 9-pin D-Sub & one 25-pin D-sub openings |                                  |
| Environment              |                        | Operating                                    | Non-Operating                    |
|                          | Temperature            | 0 ~ 40 °C (32 ~ 104 °F)                      | -20 ~ 60 °C (-4 ~ 140 °F)        |
|                          | Humidity               | 10 ~ 85% @ 40 °C, non-condensing             | 10 ~ 95% @ 40 °C, non-condensing |
|                          | Vibration (5 ~ 500 Hz) | 1 G                                          | 2 G                              |
| Physical Characteristics | Dimensions (W x H x D) | 482 x 177 x 479 mm (19" x 7" x 18.9")        |                                  |
|                          | Weight                 | 14 kg (31 lb)                                |                                  |

\*allow one 2.5" HDD/SSD installed without convert bracket.

### Front View

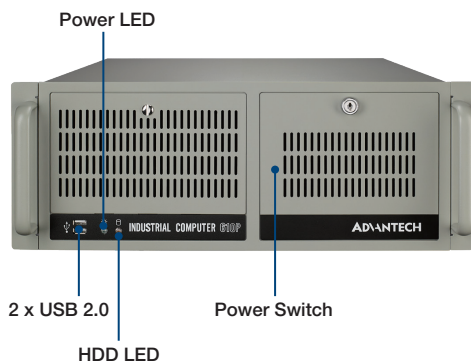


### Rear View

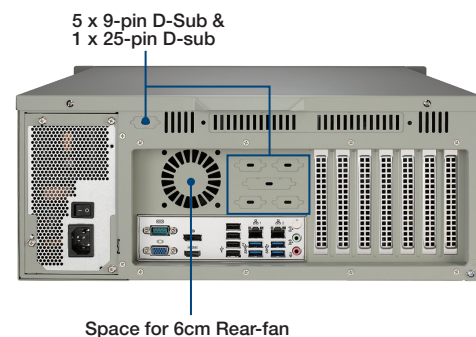

## Dimensions

Unit: mm [inch]

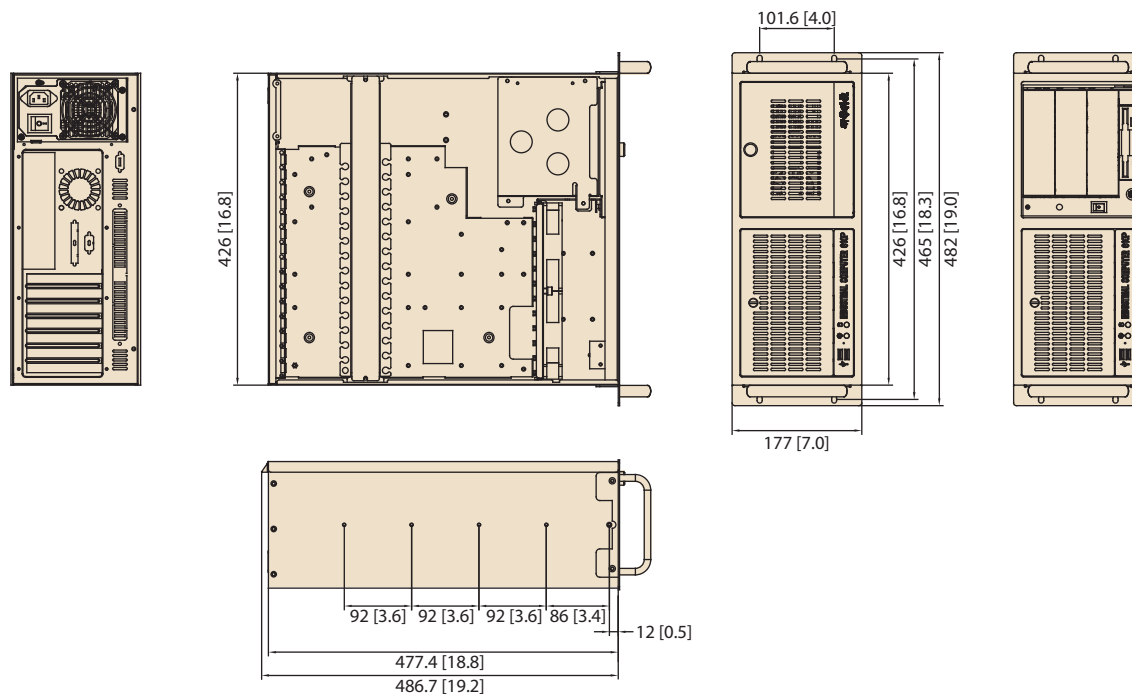

## Ordering Information

| Part Number                | Power Supply    | Switch Type |
|----------------------------|-----------------|-------------|
| <b>Motherboard Version</b> |                 |             |
| IPC-610MB-85PEA1           | 96PS-A850WPS2GF | ATX 3.1     |
| IPC-610MB-12PEA1           | 96PS-A1K2WPS2PF | ATX 3.1     |

## Spare Parts

| Part Number    | Description                    |
|----------------|--------------------------------|
| 2130006147S000 | Door filter 97.6 x 36.6 x 5 mm |
| 2130004803S000 | Fan filter 115 x 195 x 5 mm    |

## Optional Accessories

| Part Number  | Description                                                                   |
|--------------|-------------------------------------------------------------------------------|
| IPC-DT-5230E | Mobile rack for converting dual 5.25" drive bays to three 3.5" SATA HDD trays |
| IPC-DT-3120E | Mobile rack converting a 3.5" drive bay to dual 2.5" SATA HDD/SSD trays       |
| 989K008733   | Module to fix a 3.5" HDD in 5.25" bay                                         |
| 989K008734   | Module to fix two 2.5" HDDs in 3.5" bay                                       |
| 98R1BTOS000  | Module to fix four 2.5" HDDs in 5.25" bay                                     |
| 9680006905   | 26" Slide rails for 2U or higher chassis (pair)                               |

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.