

SKY-602E3

Compact Size Mid Tower GPU Server AMD® EPYC™ Embedded 8004 Series Processor



Features

- Processor: Single AMD® EPYC™ Embedded 8004 Series Server Processor
- Memory: 6 x DDR5-4800 MHz ECC RDIMM, up to 576GB
- Remote Management: IPMI function support
- Expansion: Supports 4 x PCIe x16 double-deck FH/10.5" cards or 2 x PCIe x16 double deck FH/10.5" cards + 4 x PCIe x8 single deck FH/10.5" cards
- PSU: 1200 Watt 1+0 power supply with 80+ platinum level certification




Specifications

Processor System	CPU Technology	AMD LGA4844 with Zen4c support, up to 64 cores / 128 threads	
	CPU Type	Single Socket AMD® EPYC™ Embedded 8004 Series server processor, TDP max 225 W	
	Memory Type	6 x DDR5-4800MHz ECC RDIMM, up to 576GB	
Graphics	Controller	Aspeed AST2600	
	VRAM	64 MB	
Expansion Slots	Slot 1	PCIe x16 slot (PCIe x8 link share from slot 2)	
	Slot 2	PCIe x16 slot (PCIe x16 link)	
	Slot 3	-	
	Slot 4	PCIe x16 slot (PCIe x16 link)	
	Slot 5	-	
	Slot 6	PCIe x16 slot (PCIe x16 link)	
	Slot 7	PCIe x16 slot (PCIe x8 link share from slot 8)	
	Slot 8	PCIe x16 slot (PCIe x16 link)	
Drive Bay	2.5" (Internal)	2	
	3.5" (Front)	-	
	3.5" (Internal)	-	
	M.2 (2280)	2	
Ethernet	Interface	2 x 10GbE	
	Controller	Intel X710-AT2 (dual 10GbE port)	
Front I/O Interface	USB	-	
Rear I/O Interface	USB	2 x USB3.2 Gen1	
	Power Connector	1 (Reserved power output for External storage node)	
	COM	1	
	Display	1 x VGA	
	RJ-45	3 (1 x dedicated NIC for IPMI)	
Internal Connector	USB 2.0 Pin Header	1 (single port)	
	COM	2 (One reserved for side-band signal)	
	LPC	-	
Watchdog Timer	Output	System reset	
	Interval	Programmable, 1~255 sec/min	
Power Supply	Power Output Wattage	80+ platinum 1+0 power supply 1200 W @ 100-240 V _{AC}	
	Input Range	AC 100 ~ 240 V	
Cooling	Chassis Fan	4 x 80 x 38 mm high speed fans (optional 1 x 120 x 25 mm fan)	
	Dust Filter	Yes	
Miscellaneous	LED Indicators	Power status, LAN status, information LED	
	Remote Management	Advantech Remote Monitoring Utility	
Environment		Operating	Non-Operating
	Temperature	0 ~ 40°C (32 ~ 104°F)	-40 ~ 60°C (-40 ~ 140°F)
	Humidity	95% @ 40°C	95% @ 60°C
	Vibration (5 ~ 500 Hz)	0.3 Grms	1.88 Grms
	Shock	10G (with 11ms duration, half sine wave)	Optional
Physical Characteristics	Dimensions (W x H x D)	216 x 170 x 425 mm (8.5 x 6.69 x 16.73 in)	
	Package Dimensions (W x H x D)	380 x 340 x 570 mm (14.96 x 13.39 x 22.44 in)	
	Weight (N.W. / G.W.)	16 / 17.92 kg	
	Installation	Desktop / wall / rack mount	

Dimensions

Unit: mm

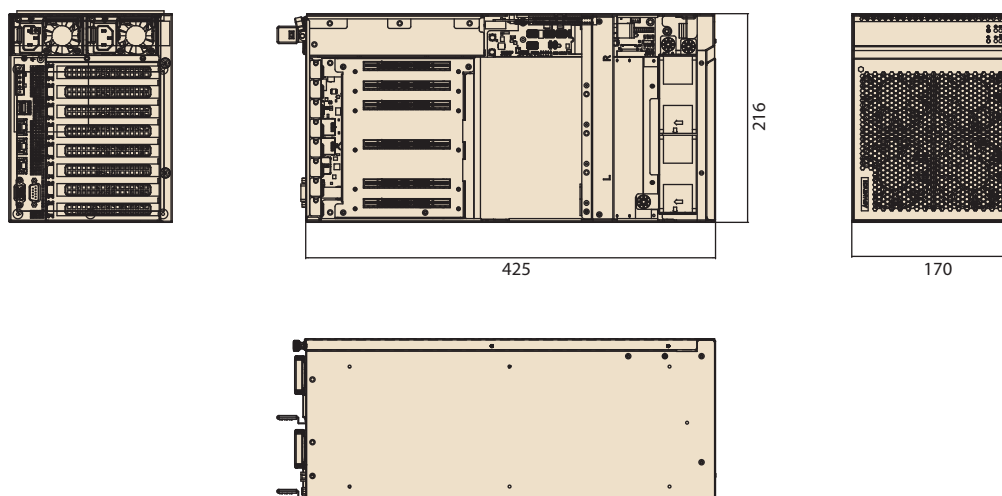

Ordering Information

Ordering PN	CPU	Memory	Storage	Network	IPMI	System FAN	CPU Thermal solution	Power Supply
SKY-602E3-S8A1	Single socket, AMD EPYC Embedded 8004 series Processor	6 x DDR5-4800, up to 576GB	2x M.2 2280 (SATA + PCIE) 2x 2.5" SATA SSD internal	2x 10G (X710)	Yes, Dedicate NIC	1x 12025 quiet fan	Standard 1U passive HS ^{Note 1,3}	800W 1+0 single
SKY-602E3-S12A1						4x 8038 high performance fan	Standard 1U passive HS ^{Note 2,3}	1200W 1+0 single
SKY-602E3-S20A1						4x 8038 high performance fan	Standard 1U passive HS ^{Note 2,3}	2000W 1+0 single

Note 1: CPU TDP support up to 125W under 40C ambient condition

Note 2: CPU TDP support up to 180W under 40C ambient condition

Note 3: for higher CPU TDP support, please select 2U active cooler from optional accessory and limited to GPU support, please contact Advantech technical support.

System Contents

Item	Advantech P/N	Quantity
1U CPU Heatsink	1970005915N001 ^{Note}	1
10.5" GPU extension bracket (supports NVFF4.0 +)	-	4
Startup manual	TBD	1
Desktop mount foot stand	-	4

Note: 1U CPU HS supports different level of CPU TDP under different scenario, max support 180W, for higher CPU TDP, please option 2U cooler

Optional Accessories

Item	Advantech P/N
Wall mount bracket	1960002043T000 (need to order 2 pcs as a set)
2U CPU cooler	1970005926N001
UL power core (125 V,15 A)	1700027928-01
BSMI power core (125 V,15 A)	1700027909-02
EU power core (250 V,10 A)	1702002605
800W CRPS module ^{Note 1}	96PSRM-A800WCRP
1200W CRPS module ^{Note 1}	96PSRM-A1K2WCRPA
2000W CRPS module ^{Note 1}	96PSRM-A2KWCRPA
12V2x6 to 12V2x6 right angle type, up to 600W ^{Note 2,3}	1700035522-01
12V2x6 to 12V2x6 vertical type, up to 600W ^{Note 2,3}	1700035523-01

Note 1: please do NOT mix use different power wattage module in a system.


Note 2: to select different power level for GPU, please set correct DIP switch on PDB board.

Note 3: each power connector on PDB support max 600W, but system support up to 2x 600W or 4x350W GPU under 2000W configuration.


Front View



Rear View

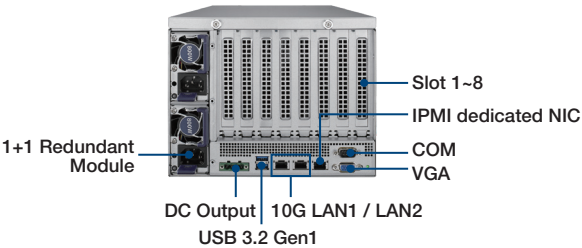

Inside View

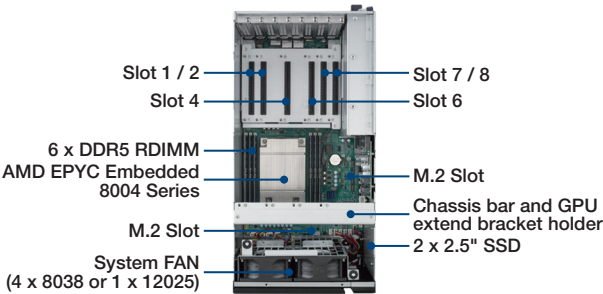

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.