

2.5" SATA SSD

Version 1.2
Jun. 23, 2022

ISSS31C

128GB, 256GB, 512GB, 1TB, 2TB

Proprietary and Confidential

All information, materials and content available in this document are protected by copyrights and other intellectual property rights, all rights are strictly reserved. Any portion of this document shall not be reproduced, copied, or translated to any other forms without permission

Revision History

Revision	Date	Description	Editor
1.0	Mar. 01, 2022	Initial release	Austin Lee
1.1	Mar. 25, 2022	Update TBW information	Austin Lee
1.2	Jun. 23, 2022	Update TBW information	Austin Lee

TABLE OF CONTENTS

1.0 General Description	2
1.1 Functional Block	2
2.0 Mechanical Specifications	3
2.1 Physical Dimensions and Weights	3
2.2 Product Dimensions	3
3.0 Product Specifications	4
3.1 Interface and Configurations	4
3.2 Capacity	4
3.3 Performance	4
3.4 Electrical Specifications	5
3.5 Environmental Conditions	6
3.6 Reliability	6
3.7 Endurance	6
4.0 Support Command Sets	7
4.1 Identify Device Command	7
4.2 S.M.A.R.T. Attribute	19
5.0 Pin Assignment and Descriptions	20
6.0 Ordering Information	21
7.0 Package Specification	21

Key Features


- **Capacity:**
 - 128GB, 256GB, 512GB, 1TB, 2TB
- **NAND Flash:** 3D TLC 112L
- **DRAM Buffer:** DDR3
- **Form Factor:** 2.5 inch SATA
- **Host Interface:**
 - Serial ATA 6Gb/s interface
 - Compliant with ATA-8 Standard
 - Compliant with SATA Revision 3.1
- **Flash Management:**
 - LDPC ECC engine
 - RAID engine
 - Global wear-leveling
 - Bad block management
 - Garbage collection
 - TRIM command
 - SLC cache technology
 - NCQ command
- **Data Integrity:**
 - Thermal throttling
 - S.M.A.R.T. monitor
- **Performance:**
 - Sequential Read: Up to 560 MB/s
 - Sequential Write: Up to 500 MB/s
 - Random 4K Read: Up to 85K IOPS
 - Random 4K Write: Up to 75K IOPS
- **Power Consumption:**
 - Device Sleep: 5mW
 - Slumber: 0.05W
 - Idle: 0.5W
 - Sequential Read/Write: 2.3W/2.2W
 - Random Read/Write: 2.0W/1.9W
- **Temperature:**
 - Standard: 0°C ~ 70°C
 - Non-operation: -55°C ~ 95°C
- **Reliability:**
 - Shock: 1500G/0.5ms
 - Vibration 20G Peak, 20~2000Hz
 - MTBF: 3,000,000 hours
- **Endurance:**
 - TBW: Up to 4320TB

1.0 General Description

ISSS31C industrial-grade 2.5" solid state drives implement 3D NAND Flash for superb transfer rates up to 560/500MB per second. They also feature low power consumption, high reliability, and compatibility across diverse storage applications that require security, convenience, performance, and capacity. ISSS31C solid state drives are purpose-made for industrial computing, embedded applications, and general automation, and take full advantage of proprietary A+ Testing Methodology. This guarantees drives meet the exacting requirements of industrial and enterprise applications. When it comes to SSD quality, A+ Testing Methodology delivers superior functionality and reliability. ISSS31C SSDs undergo the strictest quality controls to provide industrial systems with the best choice for reliability and rugged performance.

1.1 Functional Block

Figure 1-1 Functional Block

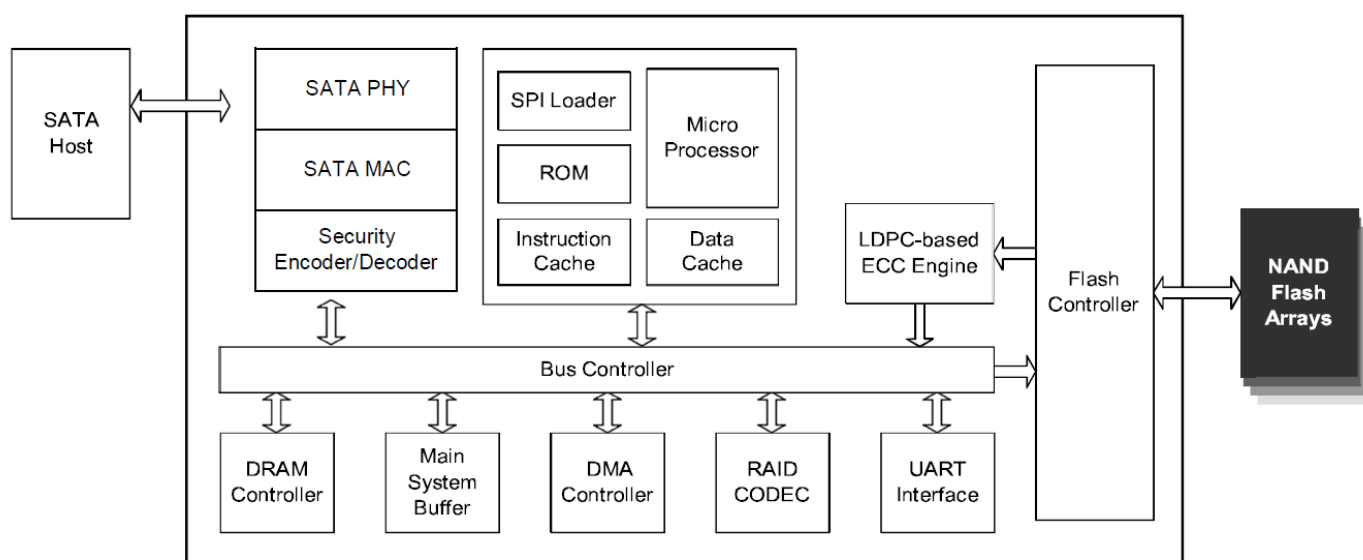

2.0 Mechanical Specifications

All product specifications not covered in this document (electrical performance, appearance, etc.) are in accordance with defined norms and standards.


2.1 Physical Dimensions and Weights

Table 2-1 Dimensions and Weights

Capacity(GB)	Length(mm)	Width(mm)	Height(mm)	Weight(gram)
128	100.25+/-0.2	69.85+/-0.25	7.0+/-0.2	43+/-5
256	100.25+/-0.2	69.85+/-0.25	7.0+/-0.2	43+/-5
512	100.25+/-0.2	69.85+/-0.25	7.0+/-0.2	43+/-5
1024	100.25+/-0.2	69.85+/-0.25	7.0+/-0.2	43+/-5
2048	100.25+/-0.2	69.85+/-0.25	7.0+/-0.2	43+/-5

2.2 Product Dimensions

Figure 2-1 Product Dimensions

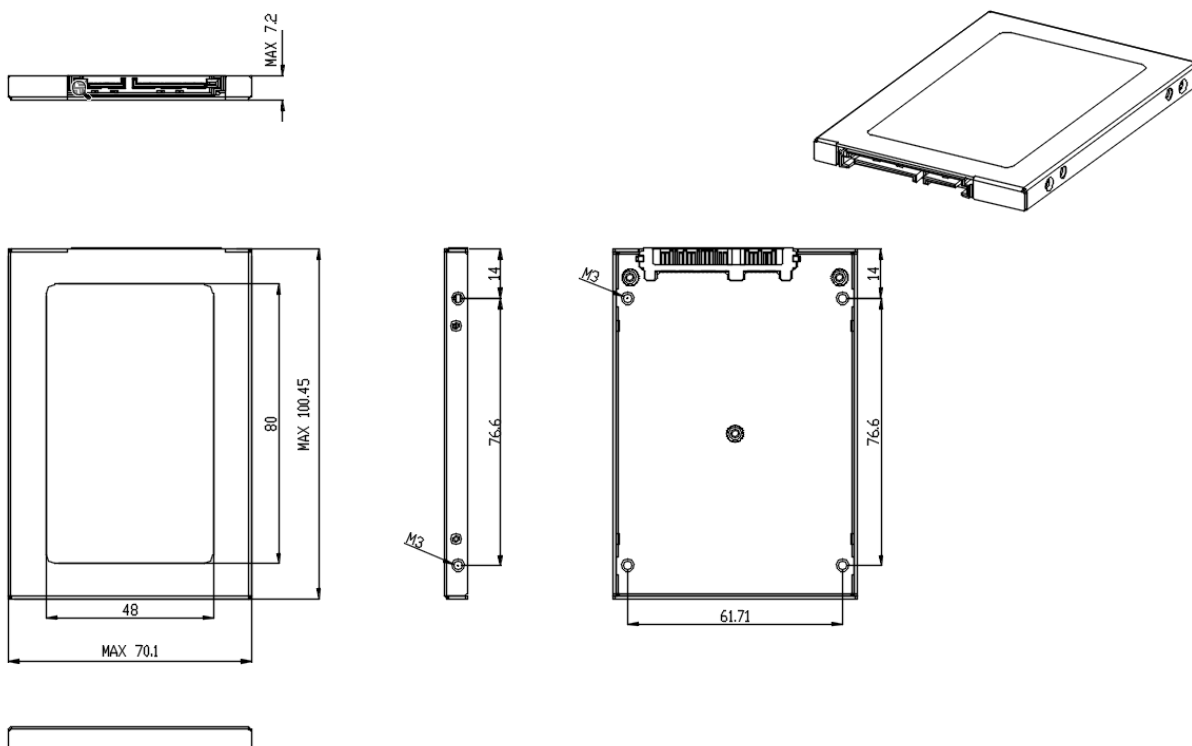

3.0 Product Specifications

3.1 Interface and Configurations

- Compliant with Serial ATA International Organization: Serial ATA revision 3.1
- Compliant with SSD Alliance compliance program
- Support ATA-8 Command Set
- Support 1-port 1.5/3.0/6.0 Gbps SATA I/II/III interface

3.2 Capacity

Table 3-1 User Addressable Sectors

Model	ISSS31C				
Unformatted Capacity	128GB	256GB	512GB	1TB	2TB
Total User Addressable Sectors (LBA Mode)	250,069,680	500,118,192	1,000,215,216	2,000,409,264	4,000,797,360

Total useable capacity may be less (due to formatting, flash management, and other functions).
1GB=1,000,000,000 bytes; 1sector = 512bytes.

3.3 Performance

3.3.1 ATTO Performance

Table 3-2 Read/Write Performance (ATTO)

	128GB	256GB	512GB	1TB	2TB	Unit
Sequential Read	450	540	540	540	540	MB/s
Sequential Write	380	460	480	490	490	MB/s

-Seq. Read & Write speed test by ATTO

-The system conditions and test environment may affect test result

3.3.2 CDM Performance

Table 3-3 Read/Write Performance (CDM)

	128GB	256GB	512GB	1TB	2TB	Unit
Sequential Q32 Read	460	560	560	560	560	MB/s
Sequential Q32 Write	390	470	490	500	500	MB/s

-Seq. Read & Write speed test by Crystal Disk Mark 5.1.2

3.3.3 IOPS Performance

Table 3-4 Read/Write IOPS Performance

	128GB	256GB	512GB	1TB	2TB	Unit
4K Random Read	35K	65K	85K	85K	85K	IOPS
4K Random Write	55K	60K	75K	75K	75K	IOPS

- Seq. Read & Write speed test by IOMeter 2010 with "00" pattern (Queue depth of 32; Measurements are performed on 10% capacity of LBA range. Write cache enable)
- IOPS Test Utility: IOMeter 2010 (Queue depth of 32; Measurements are performed on 10% capacity of LBA range. Write cache enable)
- Different system conditions and test environments may affect test results

3.3.4 AS-SSD Performance

Table 3-5 Read/Write Performance (AS-SSD)

	128GB	256GB	512GB	1TB	2TB	Unit
Sequential Read	410	490	490	490	490	MB/s
Sequential Write	300	390	440	440	440	MB/s
4K-64 Thrd Read	100	200	350	350	350	MB/s
4K-64 Thrd Write	80	170	310	310	310	MB/s

- Seq. Read & Write speed test by AS-SSD with Random pattern

3.4 Electrical Specifications

3.4.1 Operating Voltage

Table 3-6 Operating Voltage

Operating Voltage	
Input Power	DC 5.0V \pm 10%
Maximum Allowable Ripple	100mV p-p

3.4.2 Power Consumption

Table 3-7 Power Consumption (Typical)

	128GB	256GB	512GB	1TB	2TB	Unit
Device Sleep	5	5	5	5	5	mW
Slumber	0.04	0.05	0.06	0.07	0.07	W
Idle	0.5	0.6	0.6	0.6	0.6	W
Sequential Read	1.5	2.0	2.2	2.3	2.3	W
Sequential Write	1.5	1.8	2.0	2.2	2.2	W
Random Read	1.4	1.9	1.9	2.0	2.0	W
Random Write	1.4	1.8	1.8	1.9	1.9	W

- The typical value means to measure the power consumption by using IO Meter with 128KB Sequential and 4K Random read/write transfers within 15 minutes.
- The measurement may vary among different host systems and settings.

3.5 Environmental Conditions

Table 3-8 Temperature and Humidity

Feature	Operating	Non-Operating
Standard Temperature	0°C to 70°C	-55°C to 95°C
Humidity	5%~95% RH, non-condensing	

3.6 Reliability

Table 3-9 Shock and Vibration

Parameter	Conditions	Reference Standards
Shock	1500G, 3 axes, duration 0.5ms, Half Sine Wave	JESD22-B110
Vibration	20G , 3 axes , Peak, 20~2000Hz	JESD22-B103

Table 3-10 MTBF

Parameter	Conditions	Hours
MTBF	MIL-HDBK-217	3,000,000

3.7 Endurance

SSD endurance can be predicted based on the operating workload. The table below shows the drive lifetime for each SSD capacity based JESD219 client workload.

Table 3-11 Terabytes Written

Capacity	128GB	256GB	512GB	1TB	2TB	Unit
TBW	270	540	1080	2160	4320	TB

4.0 Support Command Sets

4.1 Identify Device Command

IDENTIFY DEVICE (ECh). These commands read out 512Bytes of drive parameter information. Parameter Information consists of the arrangement and value as shown in the following table. This command enables the host to receive the Identify Drive Information from the device.

Table 4-1 Identify Device Table

Word	Value	F/V/X	Description
0	0040h	F	General configuration bit-significant information:
	0		15 0 = ATA device
	0		14-8 Retired
	1		7:6 Obsolete
	0		5-3 Retired
	0		2 Response incomplete
	0		1 Retired
	0		0 Reserved
1	3FFFh	X	Obsolete
2	C837h	V	Specific configuration
3	0010h	X	Obsolete
4-5	XXXXh	X	Retired
6	003Fh	X	Obsolete
7-8	XXXXh	V	Reserved for the Compact Flash Association
9	0000h	X	Retired
10-19	XXXXh	F	Serial number
20-21	XXXXh	X	Retired
22	0000h	X	Obsolete
23-26	XXXXh	F	Firmware revision (8 ASCII characters)
27-46	XXXXh	F	Model number (40 ASCII characters)
47	8010h	F	Capabilities
	80		15-8 80h
	10		07-00 00h = Reserved
			01h-FFh = Maximum number of logical sectors that shall be transferred per DRQ data block on READ/WRITE MULTIPLE commands
48	4000h	F	Trusted Computing feature set options
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	0000		13:1 Reserved for the Trusted Computing Group
	0		0 1=Trusted Computing feature set is supported
49	2F00h	F	Capabilities

	0		15:14 Reserved for the IDENTIFY PACKET DEVICE command
	1		13 1 = Standby timer values as specified in this standard are supported
			0 = Standby timer values shall be managed by the device
	0		12 Reserved for the IDENTIFY PACKET DEVICE command
	1		11 1 = IORDY supported
			0 = IORDY may be supported
	1		10 1 = IORDY may be disabled
	1		9 1 = LBA is supported
	1		8 1 = DMA supported
	00		7:2 Reserved
	0		1:0 Current Long Physical Sector Alignment setting
50	4001h	F	Capabilities
	0	F	15 Shall be cleared to zero
	1	F	14 Shall be set to one
	000	X	13:02 Reserved
	0	X	1 Obsolete
	1	F	0 Vendor specific Standby timer value minimum
51-52	XXXXh	X	Obsolete
53	0006h		Field Validity
	00	F	15:8 Free-fall Control Sensitivity
			00h = Vendor's recommended setting
			01h-FFh = Sensitivity level
	00	X	7:3 Reserved
	1	F	2 1 = Word 88 are valid
	1	F	1 1 = Word 70:64 are valid
	0	F	0 Obsolete
54-58	XXXXh	X	Obsolete
59	BD10h		Capabilities
	1	F	15 1 = BLOCK ERASE EXT command is supported
	0	F	14 1 = OVERWRITE EXT command is supported
	1	F	13 1 = CRYPTO SCRAMBLE EXT command is supported
	1	F	12 1 = Sanitize feature set is supported
	6	F	11:9 Reserved
	1	V	8 1 = Multiple logical sector setting is valid
	10	V	7:0 Current setting for number of logical sectors
60-61	XXXXh	F	Total number of user addressable logical sectors
62	0000h	X	Obsolete
63	0007h		Multiword DMA transfer

	00	F	15:11 Reserved
	0	V	10 1 = Multiword DMA mode 2 is selected
	0	V	9 1 = Multiword DMA mode 1 is selected
	0	V	8 1 = Multiword DMA mode 0 is selected
	00	X	7:3 Reserved
	1	F	2 1 = Multiword DMA mode 2 and below are supported
	1	F	1 1 = Multiword DMA mode 1 and below are supported
	1	F	0 1 = Multiword DMA mode 0 is supported
64	0003h		PIO transfer mode
	0000	F	15:2 Reserved
	3	F	1:0 PIO modes supported
65	0078h		Minimum Multiword DMA transfer cycle time per word
		F	15:0 Cycle time in nanoseconds
66	0078h		Manufacturer's recommended Multiword DMA transfer cycle time
		F	15:0 Cycle time in nanoseconds
67	0078h		Minimum PIO transfer cycle time without flow control
		F	15:0 Cycle time in nanoseconds
68	0078h		Minimum PIO transfer cycle time with IORDY flow control
		F	15:0 Cycle time in nanoseconds
69	0D18h	X	Additional Supported
	0		15 1 = CFAST Specification Support
	0		14 1 = Deterministic data in trimmed LBA range(s) is supported
	0		13 1 = Long Physical Sector Alignment Error Reporting Control is supported
	0		12 Obsolete
	1		11 1 = READ BUFFER DMA is supported
	1		10 1 = WRITE BUFFER DMA is supported
	0		9 1 = SET MAX SET PASSWORD DMA and SET MAX UNLOCK DMA are supported
	1		8 1 = DOWNLOAD MICROCODE DMA is supported
	0		7 Reserved for IEEE 1667
	0		6 0 = Optional ATA device 28-bit commands supported
	0		5 1 = Trimmed LBA range(s) returning zeroed data is supported
	1		4 1 = Device Encrypts All User Data
	1		3 1 = Extended Number of User Addressable Sectors is supported
	0		2 1 = All write cache is non-volatile
	0		1:0 Reserved
70	0000h	F	Reserved
71-74	XXXXh	F	Reserved for the IDENTIFY PACKET DEVICE command

75	001Fh		Queue depth
	000	F	15:5 Reserved
	1F	F	4:0 Maximum queue depth - 1
76	850Eh	X	Serial ATA Capabilities
	1		15 1 = Supports READ LOG DMA EXT as equivalent to READ LOG EXT
	0		14 1 = Supports Device Automatic Partial to Slumber transitions
	0		13 1 = Supports Host Automatic Partial to Slumber transitions
	0		12 1 = Supports NCQ priority information
	0		11 1 = Supports Unload while NCQ commands are outstanding
	1		10 1 = Supports the SATA Phy Event Counters log
	0		9 1 = Supports receipt of host initiated power management requests(HIPM)
	1		8 1 = Supports the NCQ feature set
	0		7:4 Reserved for Serial ATA
	1		3 1 = Supports SATA Gen3 Signaling Speed (6.0Gb/s)
	1		2 1 = Supports SATA Gen2 Signaling Speed (3.0Gb/s)
	1		1 1 = Supports SATA Gen1 Signaling Speed (1.5Gb/s)
	0		0 Shall be cleared to zero
77	0006h	X	Serial ATA Additional Capabilities
	000		15:7 Reserved for Serial ATA
	0		6 1 = Supports RECEIVE FPDMA QUEUED and SEND FPDMA QUEUED commands
	0		5 1 = Supports NCQ Queue Management Command
	0		4 1 = Supports NCQ Streaming
	3		3:1 Serial ATA signal speed (01:Gen1, 02:Gen2, 03:Gen3)
	0		0 Shall be cleared to zero
78	014Ch	X	Serial ATA features supported
	0	X	15:9 Reserved for Serial ATA
	1	X	8 1 = Device Sleep supported
	0	X	7 1 = Device supports NCQ Autosense
	1	X	6 1 = Device supports Software Settings Preservation
	0	X	5 Reserved for Serial ATA
	0	X	4 1 = Device supports in-order data delivery
	1	X	3 1 = Device supports initiating power management(DIPM)
	1	X	2 1 = Device supports DMA Setup auto-activation
	0	X	1 1 = Device supports non-zero buffer offsets
	0	F	0 Shall be cleared to zero
79	0040h		Serial ATA features enabled

	00		15:9 Reserved for Serial ATA
	0		8 1 = Device Sleep enabled
	0		7 1 = Automatic Partial to Slumber transitions enabled
	1		6 1 = Software Settings Preservation enabled
	0		5 Reserved for Serial ATA
	0		4 1 = In-order data delivery enabled
	0		3 1 = Device initiated power management enabled(DIPM)
	0		2 1 = DMA Setup auto-activation enabled
	0		1 1 = Non-zero buffer offsets enabled
	0		0 Shall be cleared to zero
80	07F0h	X	Major version number 0000h or FFFFh = device does not report version
	00		15:11 Reserved
	1		10 1 = supports ACS-3
	1		9 1 = supports ACS-2
	1		8 1 = supports ATA8-ACS
	1		7 1 = supports ATA/ATAPI-7
	1		6 1 = supports ATA/ATAPI-6
	1		5 1 = supports ATA/ATAPI-5
	8		4:1 Obsolete
	0		0 Reserved
81	006Dh	V	Minor version number
82	706Bh	X	Commands and feature sets supported
	0		15 Obsolete
	1		14 1 = NOP command is supported
	1		13 1 = READ BUFFER command is supported
	1		12 1 = WRITE BUFFER command is supported
	0		11:10 Obsolete
	0		9 1 = DEVICE RESET command is supported
	0		8:7 Obsolete
	1		6 1 = Read look-ahead is supported
	1		5 1 = Volatile write cache is supported
	0		4 1 = PACKET feature set is supported
	1		3 1 = Power Management feature set is supported
	0		2 Obsolete
	1		1 1 = Security feature set is supported
	1		0 1 = SMART feature set is supported
83	7409h	X	Commands and feature sets supported

	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	1		13 1 = FLUSH CACHE EXT command is supported
	1		12 1 = Mandatory FLUSH CACHE command is supported
	0		11 Obsolete
	1		10 1 = 48-bit Address feature set is supported
	0		9:8 Obsolete
	0		7 Reserved for the Address Offset Reserved Area Boot Method
	0		6 1 = SET FEATURES subcommand is required to spin-up after power-up
	0		5 1 = PUIS feature set is supported
	0		4 Obsolete
	1		3 1 = APM feature set is supported
	0		2 1 = CFA feature set is supported
	0		1 Obsolete
	1		0 1 = DOWNLOAD MICROCODE command is supported
84	4163h	X	Commands and feature sets supported
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	0		13 IDLE IMMEDIATE command with UNLOAD feature is supported
	0		12 Reserved for TLC
	0		11 Reserved for TLC
	0		10:9 Obsolete
	1		8 1 = 64-bit world wide name is supported
	0		7 Obsolete
	1		6 1 = WRITE DMA FUA EXT and WRITE MULTIPLE FUA EXT commands are supported
	1		5 1 = GPL feature set is supported
	0		4 1 = Streaming feature set is supported
	0		3 Obsolete
	0		2 1 = Media serial number is supported
	1		1 1 = SMART self-test is supported
	1		0 1 = SMART error logging is supported
85	7069h	X	Commands and feature sets supported or enabled
	0		15 Obsolete
	1		14 1 = NOP command is supported
	1		13 1 = READ BUFFER command is supported
	1		12 1 = WRITE BUFFER command is supported
	0		11:10 Obsolete

	0		9 1 = DEVICE RESET command is supported
	0		8 1 = SERVICE interrupt is enabled
	0		7 1 = Release interrupt is enabled
	1		6 1 = Read look-ahead is enabled
	1		5 1 = Volatile write cache is enabled
	0		4 1 = PACKET feature set is supported
	1		3 1 = Mandatory Power Management feature set is supported
	0		2 Obsolete
	0		1 1 = Security feature set is enabled
	1		0 1 = SMART feature set is enabled
86	B409h	X	Commands and feature sets supported or enabled
	1		15 1 = Words 119-120 are valid
	0		14 Reserved
	1		13 1 = FLUSH CACHE EXT command supported
	1		12 1 = FLUSH CACHE command supported
	0		11 Obsolete
	1		10 1 = 48-bit Address features set is supported
	0		9:8 Obsolete
	0		7 1 = Reserved for Address Offset Reserved Area Boot Method
	0		6 1 = SET FEATURES subcommand is required to spin-up after power-up
	0		5 1 = PUIS feature set is enabled
	0		4 Obsolete
	1		3 1 = APM feature set is enabled
	0		2 1 = CFA feature set is supported
	0		1 Obsolete
	1		0 1 = DOWNLOAD MICROCODE command is supported
87	4163h	X	Commands and feature sets supported or enabled
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	0		13 1 = IDLE IMMEDIATE command with UNLOAD FEATURE is supported
	0		12 Reserved for TLC
	0		11 Reserved for TLC
	0		10:9 Obsolete
	1		8 1 = 64-bit world wide name is supported
	0		7 Obsolete
	1		6 1 = WRITE DMA FUA EXT and WRITE MULTIPLE FUA EXT commands are supported

	1		5 1 = GPL feature set is supported
	0		4:3 Obsolete
	0		2 1 = Media serial number is valid
	1		1 1 = SMART self-test supported
	1		0 1 = SMART error logging is supported
88	407Fh	X	Ultra DMA modes
	0		15 Reserved
	1		14 1 = Ultra DMA mode 6 is selected
	0		13 1 = Ultra DMA mode 5 is selected
	0		12 1 = Ultra DMA mode 4 is selected
	0		11 1 = Ultra DMA mode 3 is selected
	0		10 1 = Ultra DMA mode 2 is selected
	0		9 1 = Ultra DMA mode 1 is selected
	0		8 1 = Ultra DMA mode 0 is selected
	0		7 Reserved
	1		6 1 = Ultra DMA mode 6 and below are supported
	1	F	5 1 = Ultra DMA mode 5 and below are supported
	1	F	4 1 = Ultra DMA mode 4 and below are supported
	1	F	3 1 = Ultra DMA mode 3 and below are supported
	1	F	2 1 = Ultra DMA mode 2 and below are supported
	1	F	1 1 = Ultra DMA mode 1 and below are supported
	1	F	0 1 = Ultra DMA mode 0 is supported
89	0001h	F	Time required for security erase unit completion
	0		15 1 = Extended Time is reported in bits 14:0
			0 = Extended Time is reported in bits 7:0
	00		14:8 Extended Time required for Normal Erase mode
	01		7:0 Extended Time required for Normal Erase mode
90	0001h	F	Time required for Enhanced security erase completion
	0		15 1 = Extended Time is reported in bits 14:0
			0 = Extended Time is reported in bits 7:0
	00		14:8 Extended Time required for Enhanced Erase mode
	01		7:0 Extended Time required for Enhanced Erase mode
91	00FEh	V	Advanced Power Management Level
	00		15:8 Reserved
	FE		7:0 Current APM level value
92	FFFEh	V	Master Password Identifier
93	0000h	X	Hardware reset result
	0		15 Shall be cleared to zero

	0		14 Shall be set to one
	0		13 1 = device detected the CBLID- above
			0 = device detected the CBLID- below
	00		12:8 Device 1 hardware reset result
	00		7:0 Device 0 hardware reset result
94	0000h	V	Obsolete
95	0000h	V	Stream Minimum Request Size
96	0000h	V	Streaming Transfer Time - DMA
97	0000h	V	Streaming Access Latency - DMA and PIO
98-99	XXXXh	V	Streaming Performance Granularity
100-103	XXXXh	V	Number of User Addressable Logical Sectors
104	0000h	V	Streaming Transfer Time - PIO
105	0008h	V	Maximum number of 512-byte blocks per DATA SET MANAGEMENT command
106	4000h		Physical sector size / logical sector size
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	0		13 1 = Device has multiple logical sectors per physical sector
	0		12 1 = Device Logical Sector longer than 256 Words
	00		11:4 Reserved
	0		3:0 2^logical sectors per physical sector
107	0000h		Inter-seek delay for ISO 7779 standard acoustic testing
108-111	XXXXh	V	World wide name
112-115	XXXXh	X	Reserved
116	0000h	X	Reserved for TLC
117-118	XXXXh	X	Logical sector size
119	411C		Commands and feature sets supported
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	01		13:8 Reserved
	0		7 1 = Extended Power Conditions feature set is supported
	0		6 1 = Sense Data Reporting feature set is supported
	0		5 1 = Free-fall Control feature set is supported
	1		4 1 = Download Microcode mode 3 is supported
	1		3 1 = READ LOG DMA EXT and WRITE LOG DMA EXT commands are supported
	1		2 1 = WRITE UNCORRECTABLE EXT command is supported
	0		1 1 = Write-Read-Verify feature set is supported
	0		0 Reserved for DDT

120	401C		Commands and feature sets supported or enabled
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	00		13:8 Reserved
	0		7 1 = Extended Power Conditions feature set is enabled
	0		6 1 = Sense Data Reporting feature set is enabled
	0		5 1 = Free-fall Control feature set is enabled
	1		4 1 = Download Microcode mode 3 is supported
	1		3 1 = READ LOG DMA EXT and WRITE LOG DMA EXT commands are supported
	1		2 1 = WRITE UNCORRECTABLE EXT command is supported
	0		1 1 = Write-Read-Verify feature set is enabled
	0		0 Reserved for DDT
121-126	XXXXh	X	Reserved for expanded supported and enabled settings
127	0000h	F	Obsolete
128	0021h	V	Security status
	00		15-9 Reserved
	0		8 Master Password Capability: 0 = High, 1 = Maximum
	0		7-6 Reserved
	1		5 1 = Enhanced security erase supported
	0		4 1 = Security count expired
	0		3 1 = Security frozen
	0		2 1 = Security locked
	0		1 1 = Security enabled
	1		0 1 = Security supported
129-159	XXXXh	X	Vendor specific
160	0000h	X	CFA power mode
	0		15 Word 160 supported
	0		14 Reserved
	0		13 CFA power mode 1 is required for one or more commands implemented by the device
	0		12 CFA power mode 1 disabled
	000		11:0 Maximum current in mA
161-167	XXXXh	X	Reserved for the CompactFlash Association
168	0003h		Device Nominal Form Factor
	000		15:4 Reserved
	3		3:0 Device Nominal Form Factor
169	0001		DATA SET MANAGEMENT command is supported

	0000		15:1 Reserved
	1		0 1 = Trim bit in the DATA SET MANAGEMENT command is supported
170-173	XXXXh	X	Additional Product Identifier
174-175	XXXXh	X	Reserved
176-205	XXXXh	V	Current media serial number
206	0031h	X	SCT Command Transport
	0		15:12 Vendor Specific
	0		11:8 Reserved
	0		7 Reserved for Serial ATA
	0		6 Reserved
	1		5 1 = SCT Data Tables command is supported
	1		4 1 = SCT Feature Control command is supported
	0		3 1 = SCT Error Recovery Control command is supported
	0		2 1 = SCT Write Same command is supported
	0		1 Obsolete
	1		0 1 = SCT Command Transport is supported
207-208	XXXXh	X	Reserved
209	4000h		Alignment of logical blocks within a physical block
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	0000		13:0 Logical sector offset within the first physical sector where the first logical sector is placed
210-211	XXXXh	V	Write-Read-Verify Sector Count Mode 3
212-213	XXXXh	V	Write-Read-Verify Sector Count Mode 2
214-216	XXXXh	X	Obsolete
217	0001h	V	Nominal media rotation rate
220	0000h	V	Write-Read-Verify feature
	00		15:8 Reserved
	00		7:0 Write-Read-Verify feature set current mode
221	0000h	X	Reserved
222	11FFh	X	Transport major version number
	1		15:12 Transport Type (0:Parallel, 1:Serial, 2-F:Reserved)
	07		11:6 Parallel = Reserved / Serial = Reserved
	1		5 Parallel = Reserved / Serial = SATA Rev 3.0
	1		4 Parallel = Reserved / Serial = SATA Rev 2.6
	1		3 Parallel = Reserved / Serial = SATA Rev 2.5
	1		2 Parallel = Reserved / Serial = SATA II Extensions
	1		1 Parallel = ATA/ATAPI-7 / Serial = SATA 1.0a

	1		0 Parallel = ATA8-APT / Serial = ATA8-AST
223	0000h	X	Transport minor version number
224-229	XXXXh	X	Reserved
230-233	XXXXh	X	Extended Number of User Addressable Sectors
234	0001h	X	Minimum number of 512-byte data blocks per Download Microcode mode 03h operation
235	0200h	X	Maximum number of 512-byte data blocks per Download Microcode mode 03h operation
236-254	XXXXh	X	Reserved
255	XXXXh	X	Integrity word
	XX		15-8 Checksum
	XX		7-0 Checksum Validity Indicator

Notes:

F/V = Fixed/variable content.

F = the content of the word is fixed and does not change. For removable media devices, these values may change when media is removed or changed.

V = the contents of the word is variable and may change depending on the state of the device or the commands executed by the device.

X = the content of the word may be fixed or variable.

4.2 S.M.A.R.T. Attribute

The following table defines the vendor specific data in byte 2 to 361 of the 512-byte SMART data.

Table 4-2 S.M.A.R.T. Attribute

ID (Dec)	ID (Hex)	Attribute Name
1	01h	Read Error Rate
5	05h	Reallocated Sectors Count
9	09h	Power-On Hours Count
12	0Ch	Power Cycle Count
160	A0h	Uncorrectable Sector Count On Line
161	A1h	Number of Pure Spare
163	A3h	Number of Initial Invalid Block
148	94h	SLC Total Erase Count
149	95h	SLC Max Erase Count
150	96h	SLC Min Erase Count
151	97h	SLC Average Erase Count
164	A4h	TLC Total Erase Count
165	A5h	TLC Max Erase Count
166	A6h	TLC Min Erase Count
167	A7h	TLC Average Erase Count
159	9Fh	DRAM 1 bit ECC Count
168	A8h	Max Erase Count in Spec
169	A9h	Remain Life Percentage
177	B1h	Wear Leveling Count
181	B5h	Program Fail Count
182	B6h	Erase Fail Count
192	C0h	Power off Retract Count
194	C2h	Temperature
195	C3h	Hardware ECC Recovered
196	C4h	Reallocation Event Count
199	C7h	UltraDMA CRC Error Count
232	E8h	Available Reserved Space
241	F1h	Write Sector Count
242	F2h	Read Sector Count
245	F5h	Flash Write count

5.0 Pin Assignment and Descriptions

Table 5-1 Pin assignment and descriptions

Signals	S1	GND	System Ground
	S2	Rx+	Differential signals pair receive
	S3	Rx-	
	S4	GND	System Ground
	S5	Tx-	Differential signals pair transmit
	S6	Tx+	
	S7	GND	System Ground
Power	P1	V33	NC
	P2	V33	NC
	P3	DEVSLP	Device Sleep Signal Pin
	P4	GND	System Ground
	P5	GND	System Ground
	P6	GND	System Ground
	P7	V5/PC	+5V Power supply, 2 nd Pre-charge
	P8	V5	+5V Power supply
	P9	V5	+5V Power supply
	P10	GND	System Ground
	P11	DAS	Device Activity Signal
	P12	GND	System Ground
	P13	V12/PC	NC
	P14	V12	NC
	P15	V12	NC


6.0 Ordering Information

Table 6-1 Ordering Information

Model Name	Capacity	P/E cycles	Type	Remark
ISSS31C-128GCTB5	128GB	3K	2.5 SATA	0°C ~ 70°C
ISSS31C-256GCTB5	256GB	3K	2.5 SATA	
ISSS31C-512GCTB5	512GB	3K	2.5 SATA	
ISSS31C-001TCTB5	1TB	3K	2.5 SATA	
ISSS31C-002TCTB5	2TB	3K	2.5 SATA	

7.0 Package Specification

Figure 7-1 Package Specification

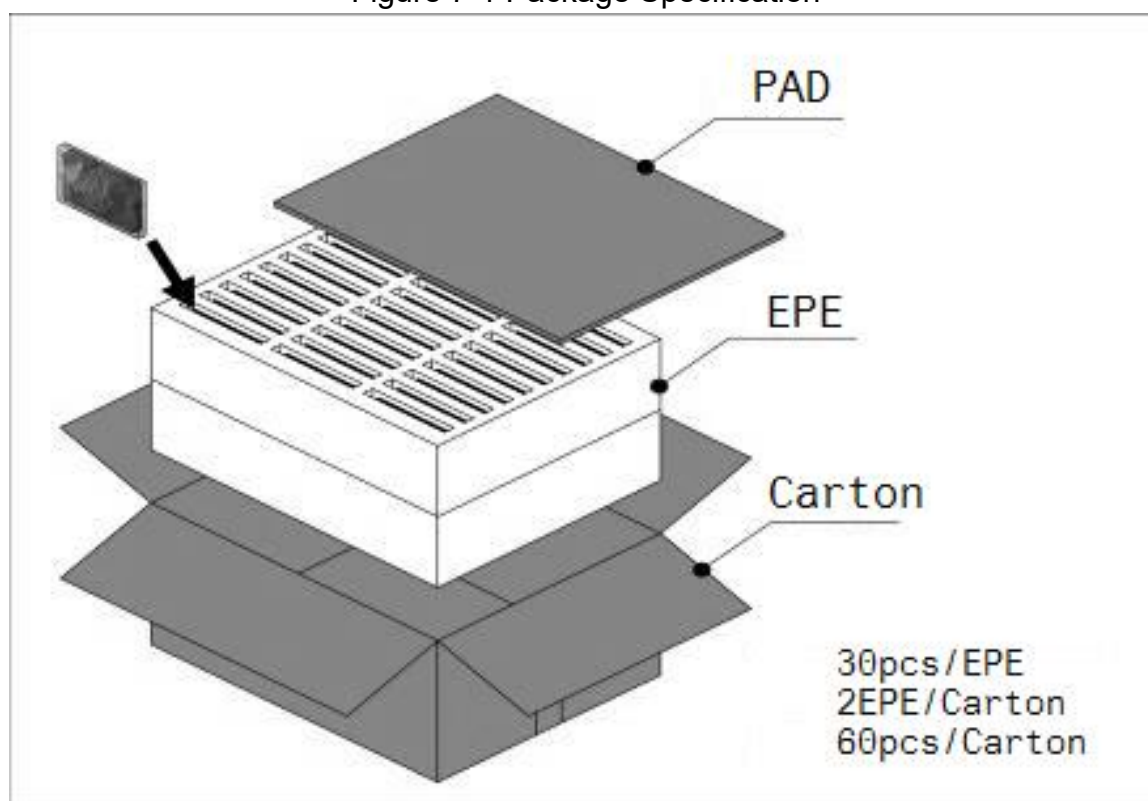

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.