

AIM-68H

10.1" Medical-Grade Tablet with Intel® Alder Lake-N Processor



Features

- Performance - Intel® N200 processor support on Windows 10/11 Enterprise
- High resolution - WUXGA 1920 x 1200 resolution with anti fingerprint, anti-glare Corning® Gorilla® Glass
- EN/UL 60601 certification - ensuring patient and medical staff safety by protecting against excessive heat and electronic interference
- Customized I/O - 16-pin pogo connector for Office/VESA Docking Stations
- Accurate patient data capture - Built-in Barcode Scanner/NFC Reader provide
- Rapid Access to Critical Patient Data - LPDDR5 RAM/m.2 NVMe SSD
- High speed connectivity - Built-in Wi-Fi 6E, Bluetooth 5.3
- Ruggedness - IP65-rated & 4-ft drop tolerance
- Equipped with DeviceOn iService Suite software for remote device management

Introduction

AIM-68H tablet is a slim, multi-functional, Intel-powered 12th Alder Lake-N N200 processor high performance tablet for medical uses. The IP65 water/dustproof 10.1" IPS Full HD screen with capacitive 10-point multi-touchscreen, anti-fingerprint (AF), anti-glare (AG), Gorilla Glass, could support touch mode under glove, water puddle. Built-in Wifi 6E, Bluetooth 5.3 supports fast, steady connectivity. Internal front (5M) and rear (13M) camera provide picture capturing wherever. Shock/vibration compliant tested on our rugged design with 4ft (1.2m) drop tolerance. ITE/Medical grade dual certification are ready for indoor and healthcare environment.

Moreover, AIM-68H is equipped with Advantech's DeviceOn - iService Suite software, which is a next-generation unified device management solution based on the WISE-DeviceOn platform. With support for batch operations and multi-device control, DeviceOn - iService Suite enables easy device configuration and deployment for convenient remote device management.

Specifications


System	Processor	Intel® N200 Processor quad-core (6M Cache, up to 3.70 GHz)
	Memory	8GB LPDDR5
	OS	Windows 10/11 IoT Enterprise (Linux OS Optional)
Storage	SSD	m.2 NVMe SSD 128 GB (256GB Optional)
Display	Type	10.1" IPS LCD
	Resolution	WUXGA 1920x1200
	Brightness	800 cd/m²
	Touch Type	10-point multi-touch P-CAP touch control
	Glass Type	Corning® Gorilla® Glass 3 (Anti-Fingerprint, Anti-Glare)
	Touch mode	Normal, Glove
Communication	WLAN	IEEE 802.11 a/b/g/n/ac/ax (Wi-Fi 6E)
	Bluetooth	Bluetooth® v5.3
	NFC	13.56 MHz, compatible with ISO15693, ISO14443A, ISO 14443B, FeliCa
Connectivity	Standard I/O	1x USB3.1 Type-C for Charging & DP, 1x USB 3.1 Type-A
	Extended I/O	1 x AIM extension 14-pin pogo connector: 1 x USB 2.0, 1 x 2-wire UART, 5V/1A power
	Docking	1 x AIM docking 16-pin pogo connector: 1 x USB 3.0, 12V power
Audio	Audio Jack	1 x Audio combo jack (combines stereo audio output and mono microphone input)
	Speaker	2 x Internal water proof speakers (2 W)
Camera	Front	5.0-megapixel fixed-focus camera
	Rear	13.0-megapixel auto-focus camera with LED flash
Barcode Scanner (Optional)		Integrated 1D/2D barcode scanner
Sensors		Ambient Light Sensor, e-Compass, G-sensor, Gyroscope
Control Buttons		1 x Power button, 2 x Volume key (up/down), 1 x Programmable button
System Indicator		Full: green (>=95%); Charging: blue; Low: orange (10%)

Specifications (Cont.)


Power System	Input Voltage	USB Type-C: 20V/3.25A Docking pogo: 12V/2A	
	Battery (Removable)	Smart battery with capacity LED indicators; 11.55V, 4010mAh, 46.31Wh Operating time: Up to 5.5 hours (depending on usage scenario) Charging time: < 3 hours	
Environment	Operating Temperature	0 ~ 40°C (32°F – 104°F)	Discharging: 0 ~ 40°C (32°F – 104°F) Charging: 0 ~ 35°C (32°F – 95°F)
	Storage Temperature	-20 ~ 60°C (-4 ~ 140°F)	
	IP Rating	IP65	
	Shock	IEC60068-2-27	
	Vibration	IEC60068-2-64	
	Drop Tested	Up to 120 cm (4 ft) onto plywood over concrete	
	Humidity	Operating: 95% @40°C non-condensing Storage: 95% @60°C non-condensing	
Security		TPM 2.0	
Warranty		Standard 2 years	
Physical Characteristics	Dimension (W x D x H)	280 x 18.3 x 180.1 mm (11 x 0.7 x 7.1 in)	
	Weight	1.1 kg (2.4 lb)	
	Color	White/Blue	
Certifications		FCC, CE, UKCA, IEC/EN/UL60601-1, EN 60601-1-2, TELEC, VCCI, CCC, RCN, IC	

Dimensions

Unit: mm

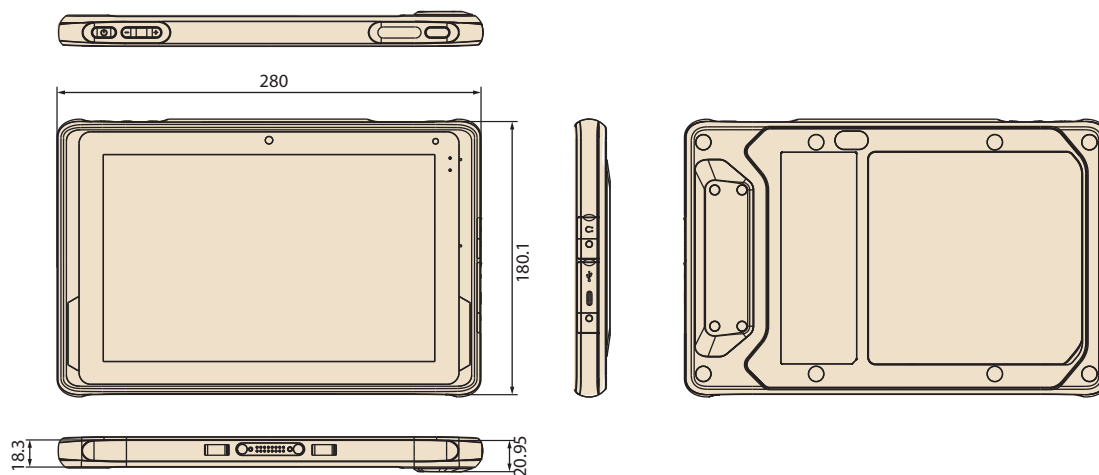

System Layout

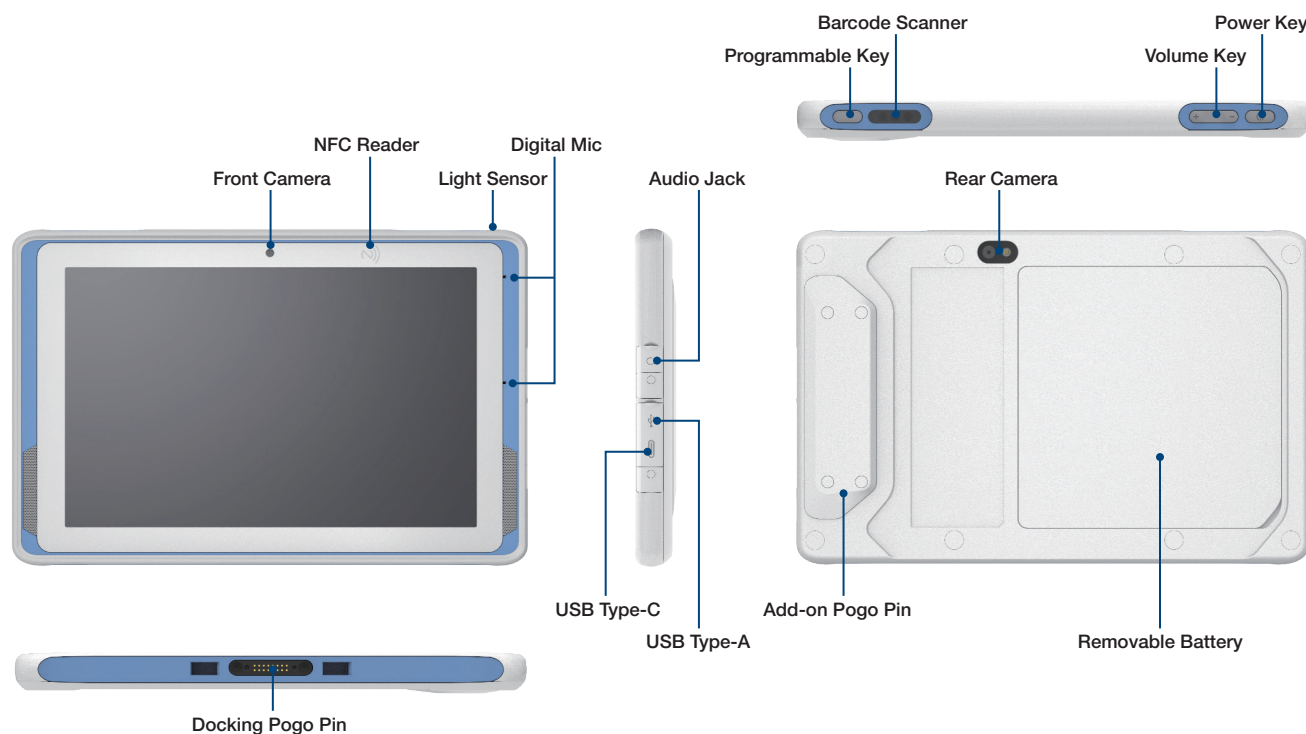

Ordering Information

Part Number	CPU	Memory	Storage	Barcode Scanner	OS
AIM-68H-202000	N200	8GB	128GB	X	Windows 10 LTSC 21H2
AIM-68H-202B00	N200	8GB	128GB	V	Windows 10 LTSC 21H2
AIM-68H-202001	N200	8GB	128GB	X	Windows 11 LTSC 24H2
AIM-68H-202B01	N200	8GB	128GB	V	Windows 11 LTSC 24H2
AIM68H2501-T	N200	8GB	128GB	X	Without OS


Optional Accessories

Part Number	Description
1702002600	US - Power Cord UL 3P 10A 125V 183cm
1702002605	EU - Power Cord EU 3P 10A 250V 183cm
1700009652	CN - Power Cord CCC 3P 10A 250V 187cm
1700000237	JP - Power Cord PSE 3P 12A 125V 183cm
1702031801	UK - Power Cord BSI 3P 10A 250V 183cm

Packing List

Description
1 x AIM-68H tablet
1 x AC/DC Type-C adaptor (96PSA-A65WPDUC-M)

DeviceOn - iService Suite

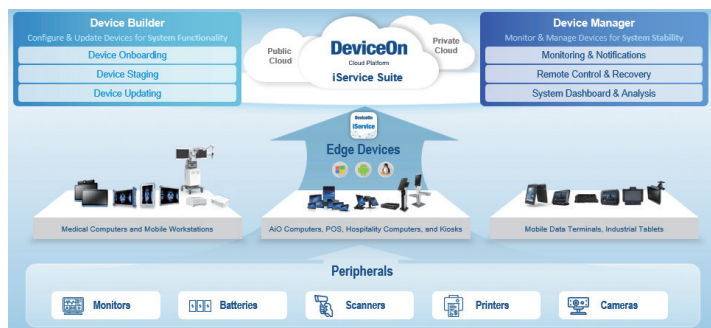

Introduction

Advantech's DeviceOn - iService Suite is an advanced remote device management solution that enables you to centrally manage your devices, minimizing the need for expensive on-site visits and saving your valuable time and resources. Device Builder ensures that your devices are always up-to-date with the latest configuration and software updates, reducing the risk of data breaches and other security threats. Meanwhile, Device Manager helps to ensure that your devices are functioning correctly, reducing downtime and enhancing productivity.

Key Functions

Device Builder



Device Onboarding

- Support Windows, Linux, Android devices
- Quick enrollment process



Device Staging

- OS configuration
- Software/peripheral watchlist
- Device label, Location management



Device Updating


- Cloud software storage
- Installation package for multiple software updating
- Android OS upgrading

Device Manager



Monitoring & Notifications

- Connection/hardware status
- Software/peripheral status
- Device abnormal notifications



Remote Control & Recovery

- Reboot & power controls
- Audio & backlight settings
- Screenshots & remote desktop / SSH



System Dashboard

- Devices working status
- Software version sync status
- Results of scheduled tasks

Services & Specifications

Functions List	OS Platform			Service Type	
	Windows	Android	Linux (Ubuntu)	Builder	Manager
	10, 11	8, 10, 12	20.04, 22.04, 24.04		
Device Onboarding - Enrollment, Locations and Labels	✓	✓	✓	✓	✓
Profile - OS Settings (Kiosk Mode, ON/Off Schedule, others are OS dependent)	✓ (LTSC)	✓		✓	✓
Profile - Alarm Rules, Software & Peripheral Monitoring, Task Schedule	✓	✓	✓		✓
OTA Update - Installation Packs, Software Storage, Android OS	✓	✓	✓	✓	✓
Monitoring - Device Hardware (CPU/RAM/Storage/Battery)	✓	✓	✓		✓
Monitoring - Advanced Battery Management	✓ (Dependent on battery model)				✓
Monitoring - Device Software (Running Status/CPU & Memory Usage)	✓	✓	✓		✓
Monitoring - Peripherals & Display (Connect Status)	✓	✓	✓ (USB Only)		✓
Control - Audio volume & Backlight	✓	✓	✓		✓
Control - Screenshot, Reboot, Shutdown	✓	✓	✓		✓
Control - Schedule Tasks	✓	✓	✓		✓
Control - Remote Desktop	✓	✓	20.04 support		✓
Control - Remote SSH			✓		✓

Ordering Information

Ordering P/N	Cloud Type	Description
36CSDOISSASP01	SaaS subscription	DeviceOn - iService Suite device annual fee (365 days)
36CSDOISPSRP01	On-premise server	DeviceOn - iService Suite device license (perpetual)
36CSDOISPSRP02	On-premise server	Server software license and installation fee for new deployment
36CSDOISPSRP03	On-premise server	Annual maintenance fee after warranty

AIM-68H VESA Docking Station



Features

- 9 ~ 32 V wide input voltage range
- VESA (75 x 75 mm)-compliant docking stations
- -10 ~ 50 °C (14 ~122 °F) operating temperature
- Reliable docking connector for office applications


CE FCC

Specifications

		Advanced VESA Docking Station	VESA Docking Station with USB
I/O		2 x USB 3.0	
		1 x RS-232 COM	2 x USB 2.0
		1 x Gigabit LAN	1 x Power jack
		1 x Power jack	
Stand		N/A	N/A
Power	Input Voltage	9 ~ 32 V	19 V
Mechanical	Dimensions (W x D x H)	159.13 x 75.49 x 227 mm (6.3 x 2.9 x 8.9 in)	159.13 x 75.49 x 227 mm (6.3 x 2.9 x 8.9 in)
	Weight	0.33 kg (0.72 lb)	0.32 kg (0.71 lb)
Environment	Operating Temperature	-10 ~ 50 °C (14 ~122 °F); 0 ~ 40 °C (32 ~104 °F) for charging	-10 ~ 50 °C (14 ~122 °F); 0 ~ 40 °C (32 ~104 °F) for charging
	Storage Temperature	-20 ~ 70 °C (-4 ~ 158 °F)	-20 ~ 70 °C (-4 ~ 158 °F)
	Safety	UL, CB, LVD, CCC	UL, CB, LVD, CCC
	Certifications	CE, FCC, CCC	CE, FCC, CCC

Dimensions

Unit: mm

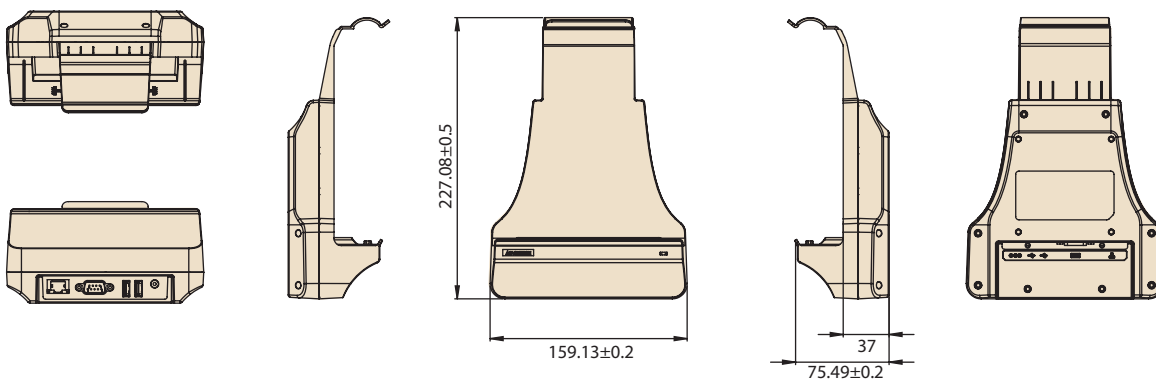

Ordering Information

Part Number	Description
AIM-VSD0-1001	AIM 10 advanced VESA docking station
AIM-VSD0-1003	AIM 10 VESA docking station with USB

Packing List


Item	AIM-VSD0-1001	AIM-VSD0-1003
1	1 x VESA Dock (Advanced I/O)	1 x VESA Dock (Charging & USB Only)
2	1 x XAIM-FSP065-DBCM1	1 x XAIM-FSP065-DBCM1

Note: The packing list doesn't include power cord. Please order based on following PNs.

Optional Accessories

Part Number	Description
1700029083-11	Power cable, UL, 2P, 10A, 125V, 112 cm (US)
1700001949	Power Cord(UK) BSI 2P 2.5A 250V 183cm
1700029278-01	Power Cord (Japan) PSE 2P 7A 125V 183cm
1700029279-01	Power Cord (NZ/AU) SAA 2P 2.5A 250V 183 cm
1700008972	Power cord (China)CCC 2P 2.5A 250 V 183 cm
1700001948-11	Power cord (EU) EU 2P 2.5A 250 V 183 cm
1700021662-01	Power Cord (TW) BSMI 2P 2.5A 125V 183cm

AIM-68H Desk Docking Station

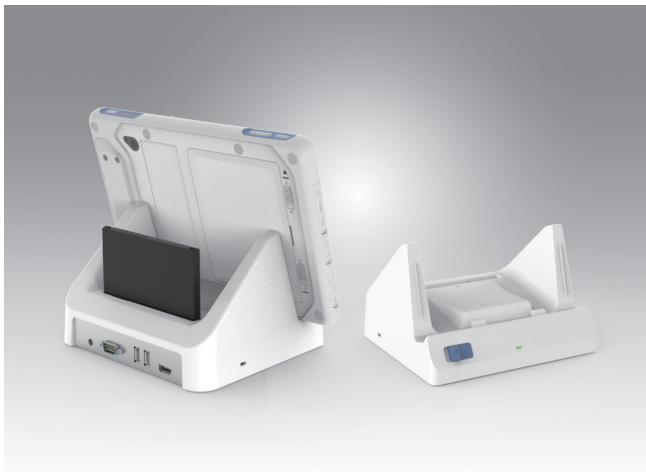

CE FCC CCC

Features


- -10 ~ 50 °C (14 ~ 122 °F) operating temperature
- Reliable docking connector for office applications

Specifications

		Advanced Desk Docking Station	Desk Docking Station with USB
I/O		2 x USB 2.0	
		1 x RS-232 COM	
Power		1 x Power jack	2 x USB 2.0
		1 x HDMI	1 x Power jack
Mechanical		1 x Battery charging bay	
	Input Voltage	19 V	19 V
Environment	Dimensions (W x D x H)	196 x 169.44 x 122.12 mm (7.72 x 6.67 x 4.81 in)	196 x 169.44 x 122.12 mm (7.72 x 6.67 x 4.81 in)
	Weight	0.76 kg (1.68 lb)	0.75 kg (1.65 lb)
Environment	Operating Temperature	-10 ~ 50 °C (14 ~ 122 °F); 0 ~ 40 °C (32 ~ 104 °F) for charging	-10 ~ 50 °C (14 ~ 122 °F); 0 ~ 40 °C (32 ~ 104 °F) for charging
	Storage Temperature	-20 ~ 70 °C (-4 ~ 158 °F)	-20 ~ 70 °C (-4 ~ 158 °F)
	Safety	CE, FCC, CCC	UL, CB, LVD, CCC
	Certifications	UL, CB, LVD, CCC	CE, FCC, CCC

Dimensions

Unit: mm

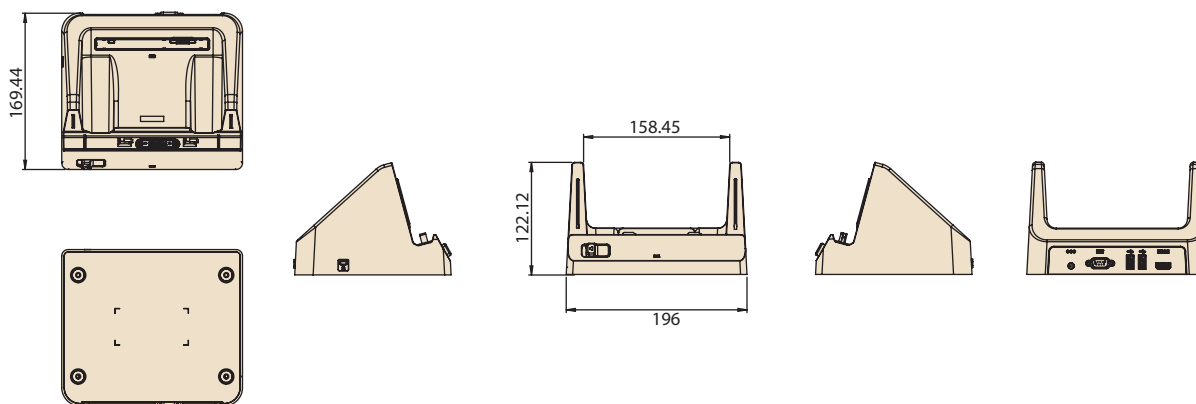

Ordering Information

Part Number	Description
AIM-OFD0-0001	AIM 10 advanced desk dock station
AIM-OFD0-0003	AIM 10 desk dock station with USB

Packing List

Item	AIM-OFD0-0001	AIM-OFD0-0003
1	1 x Desk Dock (Advanced I/O)	1 x Desk Dock (Charging & USB Only)
2	1 x XAIM-FSP065-DBCM1	1 x XAIM-FSP065-DBCM1

Note: The packing list doesn't include power cord. Please order based on following PNs.

Optional Accessories

Part Number	Description
1700029083-11	Power cable, UL, 2P, 10A, 125V, 112 cm (US)
1700001949	Power Cord(UK) BSI 2P 2.5A 250V 183cm
1700029278-01	Power Cord (Japan) PSE 2P 7A 125V 183cm
1700029279-01	Power Cord (NZ/AU) SAA 2P 2.5A 250V 183 cm
1700008972	Power cord (China)CCC 2P 2.5A 250 V 183 cm
1700001948-11	Power cord (EU) EU 2P 2.5A 250 V 183 cm
1700021662-01	Power Cord (TW) BSMI 2P 2.5A 125V 183cm

AIM-68H Vehicle Docking Station



Features

- Compatible with 9 ~ 32 V_{DC} in-vehicle power supply
- Easy and instant single-handed docking and undocking
- Anti-theft locking mechanism
- External GPS antenna
- Programmable function keys
- High-density connectors
- Compliant with SAE J1455 for vibration and shock tolerance
- Safe and reliable design for vehicle applications

CE FCC CCC

Specifications

		Fully Configured Unit	Charging Dock Only
I/O	High-Density Connector	1 x CAN bus (supports raw CAN, J1939, OBD-II/ISO 15765) with configurable firmware 5 x Digital inputs 1 x Odometer (supports dry and wet contact) with configurable and switchable firmware (default wet contact) 2 x Digital outputs (supports speed pulse) 1 x RS-232 (4 wire) 1 x RS-232/485 (2 wire) (default RS-485, termination enabled) 1 x USB 2.0 1 x Power input 12 V 1 A	1 x Power input 12 V 1 A
GPS	GPS Extended	1 x External GPS antenna	N/A
Function Keys		5 x Programmable function keys	N/A
Key Lock		Anti-theft key lock (key can be removed)	N/A
Power	Input Voltage	Supports 12/24 V vehicle power (9 ~ 32 V _{DC} input range)	
Mechanical	Dimensions (W x D x H)	226 x 83.08 x 250.24 mm (8.9 x 3.27 x 9.9 in)	
	Weight	0.77 kg (1.70 lb)	
Environment	Operating Temperature	-10 ~ 50 °C (14 ~ 122 °F); 0 ~ 40 °C (32 ~ 104 °F) for charging	
	Storage Temperature	-30 ~ 80 °C (-22 ~ 176 °F)	
	IP Rating	IP54	
	Vibration/Shock	SAE J1455	
	Safety	UL, CB, LVD, CCC	
	Vehicle Power Regulation	E-Mark, ISO7637-2	
	Certifications	CE, FCC, CCC	

Ordering Information

Part Number	Description
AIM-VED0-0422	AIM vehicle docking station (full configuration)
AIM-VED0-0423	AIM vehicle docking station (charging only)
1700026766-01	High-density cable
PWS-770-GPSAN00E	External GPS antenna
1700027666-01	Vehicle power cable (In-house engineer testing only)
1700027665-01	Vehicle power cable (vehicle battery)
XAIM-FSP065-DBC1	Adapter A/D 100-240V 65W 19V C8 DC JACK MEDICAL

Packing List


Item	AIM-VED0-0422	AIM-VED0-0423
1	1 x Vehicle Dock(Fully I/O)	1 x Vehicle Dock (Charging Only)
2	1 x Vehicle power cable (vehicle battery)	1 x Vehicle power cable (vehicle battery)

Optional Accessory


Part Number	Description
RAM-MOUNT-07E	AMPS mount w/VESA base, 1.5" ball

Dimensions

Unit: mm

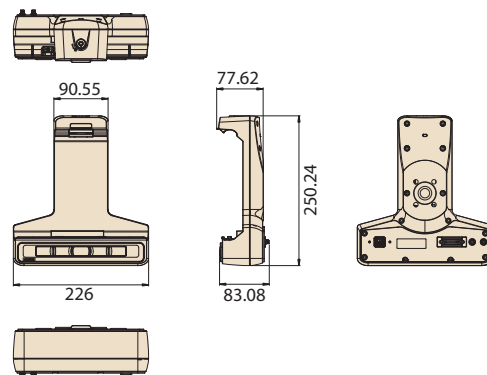

AIM Muti-Battery Charging Station

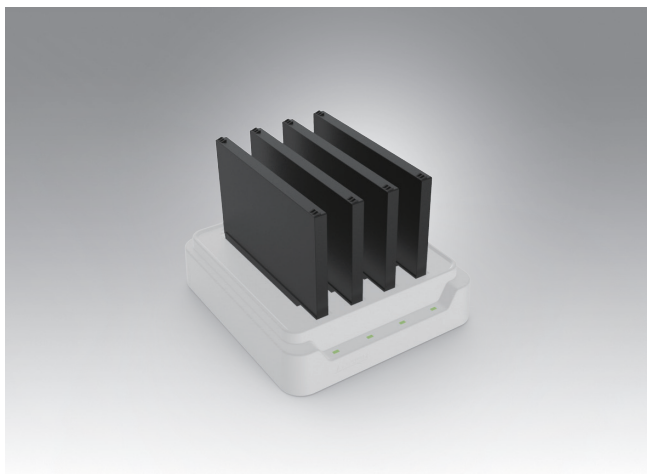

Features


- Supports charging of up to 4 batteries simultaneously
- Overcurrent and overvoltage protection provided
- LED indicators for monitoring charging status



Specifications

Multi-Battery Charging Station for AIM		
Capacity	Number of Bays	4
	Charging Current	1 A
Power	Charging Voltage	12.6 V
	Input Voltage	19 V
LED Indicators		Green: Full
		Amber: Charging
		Red: Error
Mechanical	Dimensions (W x D x H)	144 x 155 x 39 mm (5.7 x 6.1 x 1.5 in)
	Weight	0.48 kg (1.05 lb)
Environment	Operating Temperature	0 ~ 40 °C (32 ~104 °F)
	Storage Temperature	-10 ~ 50 °C (14 ~ 122 °F)
	Safety	UL, CB, LVD, CCC, RCM
	Certifications	CE, FCC, CCC, RCM, BSMI

Dimensions

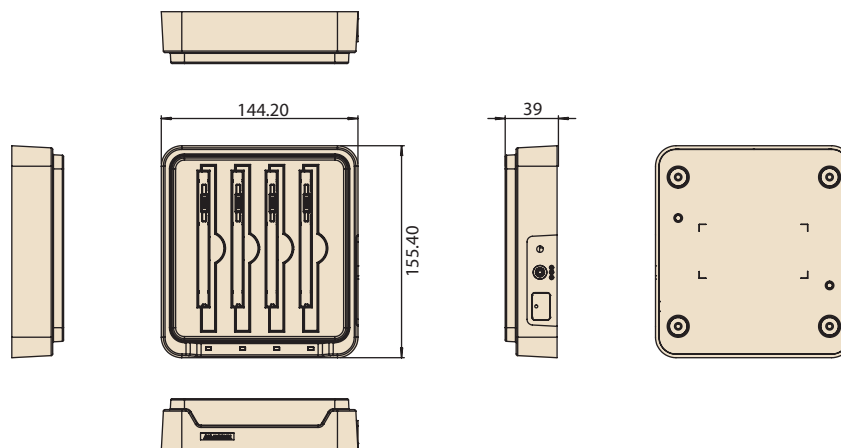

Unit: mm

Ordering Information

Part Number	Description
AIM-MBCS-0001	Multi-battery charging station for AIM

Packing List

Item	AIM-MBCS-0001
1	1 x Multi Battery Charger
2	1 x AC/DC adaptor

Note: The packing list doesn't include power cord. Please order based on following PNs.

Optional Accessories

Part Number	Description
96PSA-A65W19V1-3	ADP A/D 100-240V 65W 19V C6 DC PLUG 180° 62368
1700001524	Power cord (USA) UL 3P 10A 125V 183 cm
1700008921	Power cord (Japan) PSE 3P 7A 125V 183 cm
1700019146	Power cord (China) CCC 3P 10A 250V 183 cm
1700018553	Power cord (NZ/AU) SAA 3P 10A 250V 183 cm
170203180A	Power cord (UK) BSI 3P 10A 250V 183 cm
170203183C	Power cord (EU) 3P 2.5A 250V 183 cm

AIM-68H Extensions and Accessories

Extension Modules

Barcode Scanner (20°)



Barcode Scanner (70°)



LAN RJ-45 module



UHF RFID reader (flat type)



Part Number	AIM-BCRS-0020	AIM-BCRS-0070	White: Project-based Black: AIM-P531A0	White: Project-based Black: AIM-EXT0-0050
Features	- Sensor: 640 x 480 CMOS sensor - Illumination & Aiming: White LED illuminator/Red LED dot aimer - Frame rate: 30 fps - Field of view: Horizontal: 37.8°; Vertical: 28.8°	- Sensor: 640 x 480 CMOS sensor - Illumination & Aiming: White LED illuminator/Red LED dot aimer - Frame rate: 30 fps - Field of view: Horizontal: 37.8°; Vertical: 28.8°	- Color Black only (Color White Optional) 1 x 10/100 Ethernet port	- Color Black only (Color White Optional) - RFID output: 25W - Antenna type: Linear polarization - Frequency: EU: 867 ~ 869 MHz - Supported tag standard: EPC Class 2, Gen. 2/ ISO 18000-6C
Dimensions	130.2 x 38.7 x 27.8 mm (5.12 x 1.52 x 1.09 in)	130.2 x 38.7 x 32 mm (5.12 x 1.52 x 1.25 in)	130 x 38.7 x 31 mm (5.12 x 1.52 x 1.22 in)	130.2 x 110.75 x 82.51 mm (5.12 x 4.35 x 3.25 in)
Weight	0.042 kg (0.092 lb)	0.042 kg (0.092 lb)	0.044 kg (0.097 lb)	160 g (0.352 lb)

Accessories

Hand Strap



Shoulder Strap (Portrait)



Shoulder Strap (Landscape)



360° rotatable hand strap



Stylus Holder

Part Number	AIM-SRP0-0000	AIM-SRP0-0001	AIM-SRP0-0002	AIM-SRP0-0004
Features	Black With one stylus holder	Black With one stylus holder	Black With one stylus holder	Black 360° rotatable
Dimensions	240 x 20 mm (9.44 x 0.78 in)	380 x 135 x 20 mm (14.96 x 5.31 x 0.78 in)	1820 x 20 mm (71.65 x 0.78 in)	160 x 160 mm (6.3 x 6.3 in)
Weight	0.022 kg (0.048 lb)	0.05 kg (0.11 lb)	0.05 kg (0.11 lb)	158g (0.35lb)

Battery with Meter



Active Stylus



KickStand



Part Number	AIM-BAT0-0552	AIM-P705	AIM-KST0-1200
Features	11.55V, 4010mAh, 46.31Wh	Silver	Kickstand with 20-45 degree, Handle
Dimensions	118.4 x 116.4 x 8 mm (4.65 x 4.56 x 3.15 in)	140 x 9.7 mm (5.51 x 0.38 in)	232 x 140 x 47 mm (9.13 x 5.51 x 1.85 in)
Weight	0.21 kg (0.46 lb)	0.02 kg (0.044 lb)	0.2kg (0.44 lb)

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.