

ARK-1250L

Intel® 11th Gen Core™ i processor with
Triple LAN/ Quadruple COM Din-Rail
Fanless Box PC

NEW



Features

- Intel 11th Gen. Core i5/i3
- DIN-Rail system with essential I/O ports on front-side bezel
- Up to 4 x Intel GbE, 4 x RS-232/422/485, 8-bit DIO, optional CANBus
- 3 Expansions: M.2 E-Key 2230, M.2 B-Key 2280, 1 x Full-size mSATA share with mPCIe slot
- Dual independent displays with 1 x 4K HDMI + 1 x VGA or 2 x 4K HDMI
- 3 x USB 3.2 and 3 x USB 2.0
- mSATA and 1 x 2.5" SATA storage device
- 12V ~ 24V wide range power input
- 40 ~ 60 °C extended operating temperature
- Advantech iEdge support Qualified for Edge AI SRP of WISE-DeviceOn



WISE-DeviceOn

SUSI API



Specifications

Model Name	ARK-1250L		
Processor System	CPU	Core i5-1145G7E	Core i3-1115G4E
	Frequency	1.5GHz turbo boost up to 4.1 GHz	2.2 GHz turbo boost up to 3.9 GHz
	Core Number	4	2
	BIOS	AMI EFI 256 Mbit	
Memory	Technology	DDR4 3200 MHz	
	Max capacity	Up to 64 GB with 2 x slots	
	Socket	2 x Dual Channel DDR4 3200 MHz 260 pin SO-DIMM (no support ECC)	
Graphics	Chipset	Intel® Iris® Xe graphics	
	HDMI	Up to 4096 x 2160 @ 60Hz	
	VGA	Up to 1920 x 1200 @ 60Hz	
	Dual Display	HDMI + VGA or HDMI + HDMI (support by ARK-1250L-S5A2)	
Ethernet	LAN1	10/100/1000/2500 Mbps Intel i225 GbE, support Wake On LAN	
	LAN2	10/100/1000 Mbps Intel i219 GbE, support Wake On LAN	
	LAN3	10/100/1000/2500 Mbps Intel i225 GbE, support Wake On LAN	
	LAN4	10/100/1000/2500 Mbps Intel i225 GbE, support Wake On LAN (support by ARK-1250L-S5A2)	
Audio	Interface	Realtek ALC888S, High Definition Audio, Mic-in or Line-out	
I/O Interface	Serial Ports	4 x RS-232/422/485 with auto flow control	
	USB Ports	3 x USB3.2, 3 x USB2.0, 1 x internal USB 2.0 supported by project	
	GPIO	8-bit Programmable DIO	
	CANBus	Optional (supported by project)	
Expansion	Mini PCIe	1 x Full-size mPCIe	
	M.2	1 x M2. 2230 E key and 1 x M.2 2280 B key (PCIe) with nano SIM holder #1	
Storage	SSD/HDD	1 x 2.5" SATAIII Drive bay (compatible with 9.5mm height)	
	mSATA	1 x Full-size mSATA (*share with mPCIe slot)	
Other	WatchDog Timer	255 levels timer interval, setup by software	
	TPM	TPM 2.0 (by optional AMO-I029)	
Software Support	Microsoft Windows	Windows 10/11	
	Linux	Ubuntu 20.04/22.04	
Power Requirement	Power Type	ATX/AT	
	Power Input Voltage	12 ~ 24 V _{DC}	
	Power Adaptor	AC to DC, 90W adaptor by default	
Power Consumption	Typical (OS idle mode)	19.8W	18W
	Max. (Full loading)	35.1W	30.6W
Mechanical	Construction	Aluminum housing	
	Mounting	DIN-rail/Wall Mount	
	Dimensions (W x H x D)	60 x 173 x 141 mm (2.36 x 6.73 x 5.55 in)	
	Weight	1.5KG	
Environment	Operating Temperature	With extended temp. peripherals: -40 ~ 60° C with 0.7m/s air flow	
	Storage Temperature	-40 ~ 85 °C (-40 ~ 185°F)	
	Relative Humidity	95% @ 40 °C (non-condensing)	
	Vibration during Operation	With SSD: 3 Grms, IEC60068-2-64, random, 5~500 Hz, 1hr/axis (with Wall Mount)	
	Shock during Operation	With SSD: 30 G, IEC-60068-2-27, half sine, 11 ms duration (with Wall Mount)	
	EMC	CE/FCC Class B, CCC, UKCA	
	Safety	UL, CB, CCC, UKCA	

#1 SIM holder and M.2 slot are hardware interfaces for wireless communication integration only. System level RF certification is not available.

M.2 B key requires additional mechanical parts to fix for sizes other than 2280.

ADVANTECH

Fanless Embedded Box PCs


All product specifications are subject to change without notice.

Last updated: 4-Jul-2025


Dimensions

Unit: mm


DIN Rail

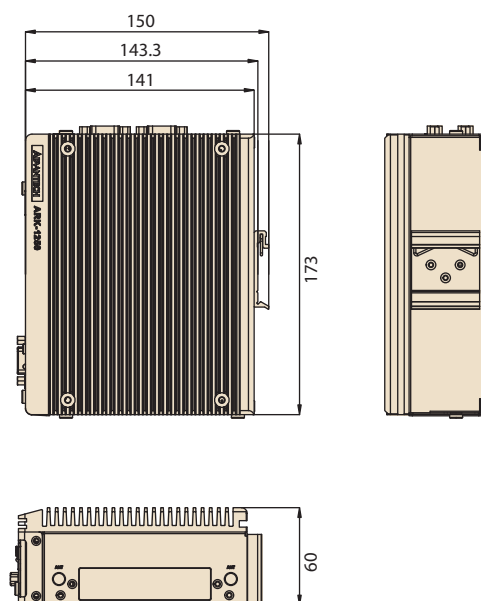


Wall Mount

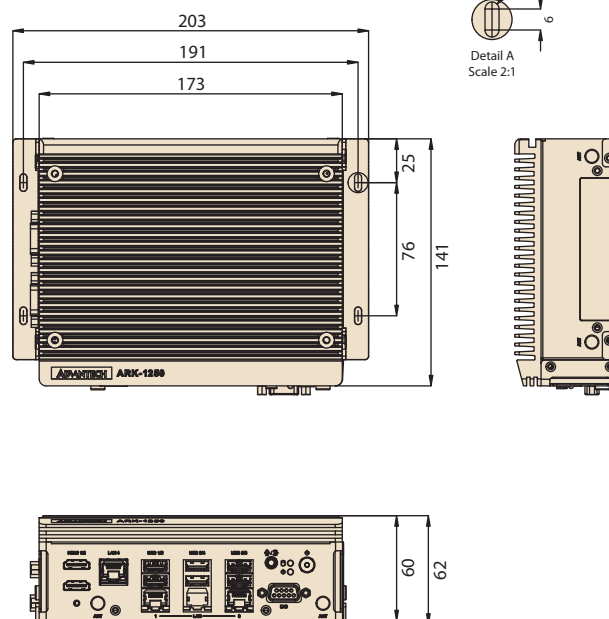


A1 Front Panel External I/O Mechanical Layout/Drawing

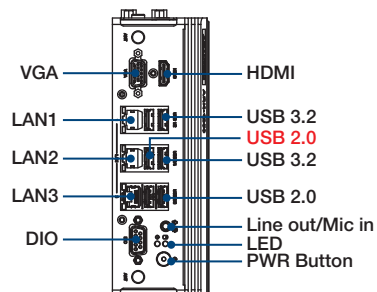


A2 Front Panel External I/O Mechanical Layout/Drawing

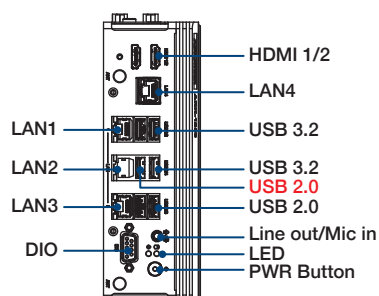

Top Panel External I/O Mechanical Layout/Drawing



Bottom View External I/O Mechanical Layout/Drawing



Ordering Information

Part No.	CPU	RAM	HDMI	VGA	GbE	USB 3.2	USB 2.0	RS-232/422/485	Audio	Full-size MiniPCle	SIM	M.2	2.5" SATA III HDD Bay	mSATA	Made in
ARK-1250L-U2A1	Intel Core i3-1115G4E	Up to 64 GB	1	1	3	3	3	4	Mic in or Line out	1	1	2	1	1 (shared w/ mPCle)	China
ARK-1250L-S5A1	Intel Core i5-1145G7E	Up to 64 GB	1	1	3	3	3	4	Mic in or Line out	1	1	2	1	1 (shared w/ mPCle)	China
ARK-1250L-U2A1U	Intel Core i3-1115G4E	Up to 64 GB	1	1	3	3	3	4	Mic in or Line out	1	1	2	1	1 (shared w/ mPCle)	Taiwan
ARK-1250L-S5A1U	Intel Core i5-1145G7E	Up to 64 GB	1	1	3	3	3	4	Mic in or Line out	1	1	2	1	1 (shared w/ mPCle)	Taiwan
ARK-1250L-S5A2	Intel Core i5-1145G7E	Up to 64 GB	2	0	4	3	3	4	Mic in or Line out	1	1	2	1	1 (shared w/mPCle)	China
ARK-1250L-S5A2U	Intel Core i5-1145G7E	Up to 64 GB	2	0	4	3	3	4	Mic in or Line out	1	1	2	1	1 (shared w/mPCle)	China

Note: P/N with alphabet "U" as suffix are Made in TW. Memory, storage and operating system bundled by request.

Packing List

Part Number	Description
-	1 x ARK-1250L Unit
-	1 x User Manual (Simplified Chinese)
-	Wrench for top cover
XARK-ADP-90MDH	AC to DC adaptor , 19V/90W
1950016395T10C	1 x DIN-rail bracket
1652004519	1 x 3-pin plug-in block for power in
1652007880-01	1 x 4-pin terminal block for switch

Embedded OS

Part Number	Description
20706WX9VS0158	Win 10 IoT Ent 2019 LTSC 64bit, English
20706WX1VS0011	Win 10 IoT Ent 2021 LTSC MultiLang ORY OEI Value EPKEA (for A1)
20706WX1VS0048	Win 10 IoT Ent 2021 LTSC Mullg ORY OEI Value EPKEA (for ARK-1250L-S5A2)
20706U20DS0042	Ubuntu 20.04 ARK-1250L 64b ENU
20706U22DS0024	Ubuntu 22.04 ARK-1250L 64b ENU
20706WLV1S0027	Win 11 IoT Ent 2024 LTSC ARK-1250L 64b 24H2 ENU

Optional Items

Part Number	Description
96PSA-A120W24T2-4	AC to DC adaptor, 24V/120W
1700001524	Power Cable 3-pin 180cm, USA type (for XARK-ADP-90MDH)
170203183C	Power Cable 3-pin 180cm, Europe type (for XARK-ADP-90MDH)
170203180A	Power Cable 3-pin 180cm, UK type (for XARK-ADP-90MDH)
1700008921	Power Cable 3-pin PSE Mark 183cm (for XARK-ADP-90MDH)
1702002600	Power cable 3-pin 183cm, USA type (for 96PSA-A120W24T2-3)
1702002605	Power cable 3-pin 183cm, EU type (for 96PSA-A120W24T2-3)
1702031801	Power cable 3-pin 183cm, UK type (for 96PSA-A120W24T2-3)
1700000237	Power cable 3-pin 183cm, PSE type (for 96PSA-A120W24T2-3)
1700024369-01	1M HDMI cable
1700031560-01	1.8M HDMI cable
1700023855-11	1M Lockable HDMI cable
1700030518-01	CANBus Cable (replacing GPIO)
1960103315N010	M.2 3052 Extend Bracket
AMK-W006	ARK-1250 wall mount kit
AMK-V023E	ARK-1250 VESA mount kit

Note: Please note that the AMK-V023E needs to be used in conjunction with the AMK-W006.

Optional TPM module

Part Number	Description
AMO-I029	TPM 2.0 Infineon SLB9670V2.0

Optional Thermal kit for 5G or Hailo module

Part Number	Description
AMK-A045	Thermal kit of ARK-1250 for 5G or Hailo AI B Key

Note: Please use mSATA or slim SATA as storage when using thermal kit.

Optional MOS modules for iDoor Expansion

Part Number	Description
MOS-2230-Z1201E	CANBus module, 2-Ch, USB Interface
MOS-2220-X1101E	Parallel LPT module, 1-Ch, USB Interface
MOS-2110Z-1201E	USB module, 2-Ch, PCle Interface
MOS-2120-Z1101E	Giga LAN Ethernet module, 1-Ch, PCle Interface
MOS-1120Y-0202E	Isolated RS-232, 2-Ch, DB9, PCle Interface
MOS-1121Y-0202E	Isolated RS-422/485, 2-Ch, DB9, PCle Interface
MOS-1120Y-1402E	Non-Isolated RS-232, DB37, 4-Ch, PCle Interface
MOS-1130Y-0201E	Isolated CANBus, 2-Ch, DB9, PCle Interface
MOS-1110Y-0101E	Isolated 16 DI/8 DO, 1-Ch, DB37, PCle Interface
MOS-2120-Z1201	GigaLAN Ethernet module, mPCle, RJ45 2-Ch, PCle I/F
MOS-2220-Z1101E	High Speed Serial COM module, 1-Ch, USB Interface
AMO-I032	Expansion kit M.2 B key for mPCle idoor

Note

- Need to order AMO-I032 together with MOS modules

- mPCle and M.2 E Key cannot be used when adding any MOS module due to mechanical interference

WISE-DeviceOn

Edge AI OTA and Container Management

WISE-DeviceOn End-to-End Solution for Edge AI

Even if all datasets, algorithms, trainings, UI/UX, and more are functioning, how can you easily deploy an AI application to hundreds, or thousands, of inference devices in production? How can you efficiently manage AI models (software updates, CI/CD), in addition to all remote, hardware devices, such as sensors?



Solution Advantages



Performance Booster

- Inference optimization
- Open Neural Network Compiler (ONNC)
- Save over 45% DRAM consumption



Fleet Management

- Remote batch control for power management, reboot, terminal and screenshot
- Real-time monitoring, diagnostics and notification
- Over 10,000 devices around the globe



Container and OTA

- Streamlined deployment process
- Docker container management
- Software OTA (over-the-air) updates



AI Security

- AI containers deployed via Azure Container Registry and Harbor
- Secured data connection (TLS/SSL)
- Integrity protection based on digital signature

👉 Find More Information about [WISE-DeviceOn End-to-End Solution for Edge AI](#)

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.