

DS-330

Fanless Outdoor System with Intel® Atom® Core™ Processor



Features

- Intel® Atom™ x7433RE, N97, i3 N305 Processor
- Book-sized Fanless System
- 3 Independent Display: HDMI x 2 + USB-C
- Versatile I/O: 2 x LAN, 4 x USB, 2 x COM
- Suitable for outdoor usage: -20 to 60°C wide temperature and 12-24V wide voltage
- Equipped with firmware TPM (fTPM) by default; discrete TPM 2.0 available as a BOM option based on project request

Trellix Acronis WISE-PaaS/SignageCMS WISE-DeviceOn


Specifications

Model Name		DS-3300F-U0A1E	DS-3300F-U1A1E	DS-3300F-U2A1E
Processor System	CPU	Intel® Atom™ X7433RE (Amston Lake)	Intel® Atom™ N97 (Alder Lake N)	Intel® Core™ i3-N305 (Alder Lake N)
	Frequency	1.5GHz	2.0GHz	1.8GHz
	Max. Frequency	3.4 GHz	3.60 GHz	3.80 GHz
	Core	4	4	8
	CPU TDP	9W	12W	15W
	System Chipset	Integrated in CPU		
Memory	Technology	DDR5 4800 MHz SODIMM		
	Max. Capacity	16GB		
	Socket	Single Slot		
Thermal Solution		Fanless		
Display	Graphics Engine	Intel UHD graphics		
	Output	HDMI 1 and 2 support up to 4K UHD resolution (HDMI 1 and 2 support HW EDID) USB-C support up to 4K UHD Resolution Supports 2 x 4K UHD and 1 x FHD Resolution in Triple Display scenario		
	Max. Resolution (HDMI 2.1 TMDS)	3840x2160 @60Hz		
	CEC	BOM Option (By project support)		
I/O Interfaces	Ethernet	2 x Intel i226IT (2.5GbE)		
	USB	4 x USB 3.2 Gen1 (Type A), 5V/0.9A 1 x USB-C: Support 1 x DP 1.4a 4K 60Hz + 1 x USB 3.2 Gen1, 5V/3A		
	Serial Ports	2 x 5V/12V Powered COM (RS-232, DB9), (Setting via jumpers; default: 0V)		
	Audio	3.5mm Audio Jack for jack sense (Line-in/out or Mic-in)		
	Function Port	1 x EDID Reset Button		
	Other	12V RJ12 for cash drawer		
	LED Indicators	1 x Power, 1 x Storage Access		
Expansion	M.2	2242 M-Key (SATA/PCIex2) 2230 E-Key (PCIe & USB2.0) ^{#1}		
Power Requirement	Power Management	ACPI 3.0		
	Input Voltage	12 ~ 24V DC-in (ATX/AT mode)		
Trusted Platform Module	TPM2.0	fTPM 2.0, Default TPM 2.0 (NPCT764AABYX), BOM option by project support		
Watchdog Timer	Output	Interrupt, system reset		
	Interval	255-level timer interval, setup by software		
Physical Characteristics	Mounting	Wall Mount		
	Dimensions (W x D x H)	180 x 150 x 35 mm		
	Weight	1.27kg		
Environment	Operating Temperature	-20 ~ 60°C / -4 ~ 140°F (with 0.7m/s air flow)	0 ~ 60°C / -32 ~ 140°F (with 0.7m/s air flow)	0 ~ 60°C / -32 ~ 140°F (with 0.7m/s air flow)
	Relative Humidity	95% @ 40°C (non-condensing), operating		
Operating System	Operating System	Windows 11 IoT, Windows 10 IoT		
	Linux	supported by project		
Certifications	EMC	CE/FCC Class B, BSMI, CCC		
	Safety	UL, CB, BSMI, UKCA, CCC		


#1 M.2 E key slot are hardware interfaces for wireless communication integration only. RF Certification is not available.

Dimensions


Unit: mm

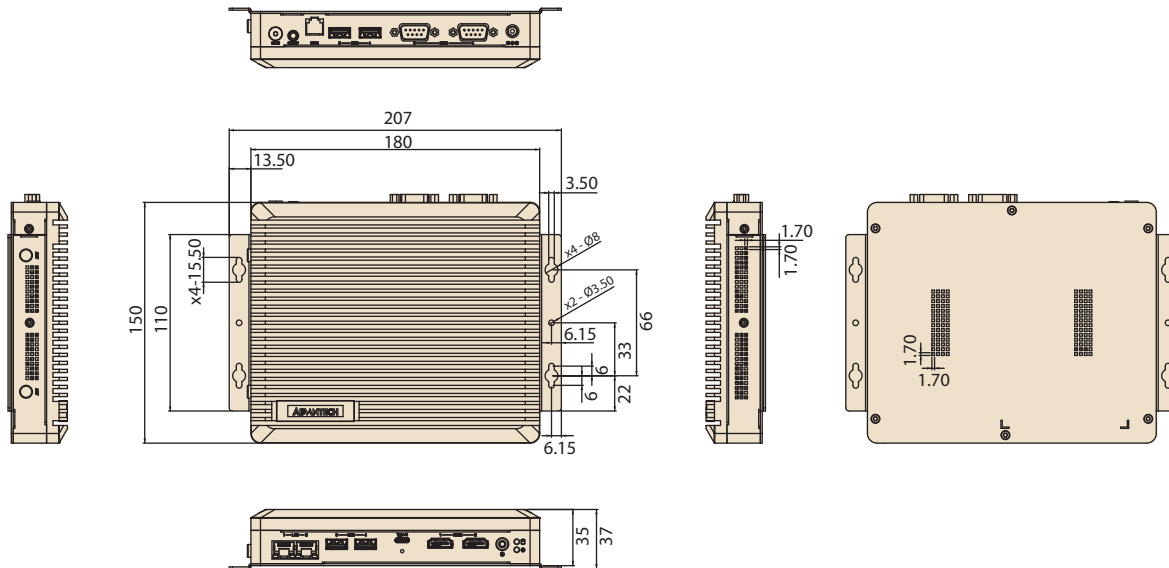

Front View




Rear View




Installation Scenarios

VESA Mount

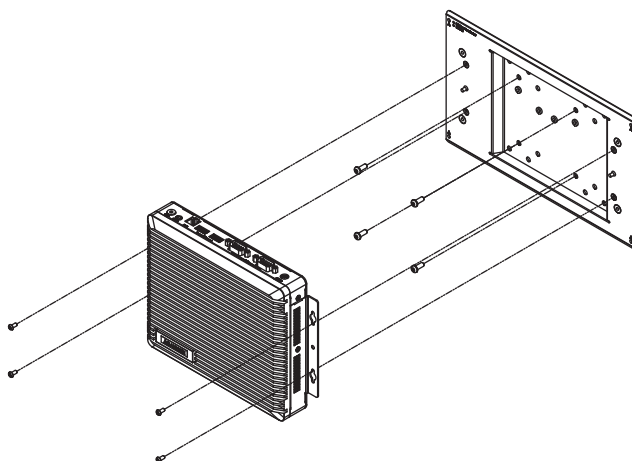

Protective Cover

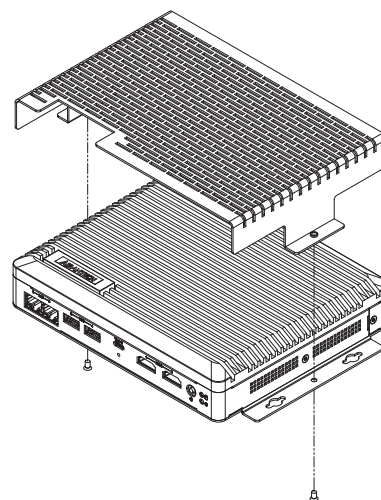

Ordering Information

Part No.	CPU	TDP	RAM	Display	LAN	USB	COM (RS-232)	RJ12	M.2	Power Input	Made In	
DS-3300F-U0A1E	x7433RE	9W	Up to 16GB	2 x HDMI 1 x USB-C	2 x Intel i2261T (2.5G)	4 x USB 3.2 Gen 1 1 x USB-C: Support DP 1.4a + USB 3.2 Gen 1	2 x COM: RS-232 (Powered)	1 x RJ12	1 (SATA/PCIex2)	12-24V DC-IN	China	
DS-3300F-U0A1U											Taiwan	
DS-3300F-U1A1E	N97	12W									China	
DS-3300F-U1A1U												Taiwan
DS-3300F-U2A1E	i3 N305	15W										China
DS-3300F-U2A1U												Taiwan

Note: RAM / Storage and Operating System bundled by request

Packing List

Part Number	Description
-	1 x DS-330
96PSA-A65W19V1-3	1 x 19V Power adapter
1990023486N001	5 x Thermal PAD for CPU/SSD/WIFI
1990025595N000	2 x Thermal PAD for Memory

RAM and Storage

Part Number	Description
SQR-SD518G5K6HNGAG	RAM DDR5 4800 8GB W.T.
SQR-SD5116G5K6HNAG	RAM DDR5 4800 16GB W.T.
SQF-C4MV2-128GDEDM	Storage M.2 NVMe 2242 TLC 128GB W.T.
SQF-C4MV2-256GDEDM	Storage M.2 NVMe 2242 TLC 256GB W.T.
SQF-C4MV2-512GDEDM	Storage M.2 NVMe 2242 TLC 512GB W.T.
SQF-C4MV4-1TDEDM	Storage M.2 NVMe 2242 TLC 1TB W.T.
SQF-S4BV1-128GDSDM	Storage M.2 SATA 2242 TLC 128GB W.T.
SQF-S4BV1-256GDSDM	Storage M.2 SATA 2242 TLC 256GB W.T.
SQF-S4BV2-512GDSDM	Storage M.2 SATA 2242 TLC 512GB W.T.
SQF-S4BV2-1TDSDM	Storage M.2 SATA 2242 TLC 1TB W.T.

Note: RAM and storage listed in the table are wide temp. version. Standard temp. options are also available by request.

Embedded OS

Part Number	Description
20706WLE1S0097	Win11 IoT LTSC EN, 64b Entry
TBD	Win10 IoT LTSC EN, 64b Entry

Power Cord

Part Number	Description
1700001524	3-pin power cord (US)
170203183C	3-pin power cord (EU)
170203180A-01	3-pin power cord (UK)
1700008921	3-pin power cord with PSE (Japan)
1700019146	3-pin power cord (CCC)
1700018553	3-pin power cord (AU)
1700024849-01	3-pin power cord (TW)

Optional Items

Part Number	Description
1960056999T301	DS-330 VESA Mount
1960119683N001	DS-330 Protective Cover
AIW-170BQ-001	Qualcomm WiFi6E M.2 2230 E key
1751000648-01	1 x Cable Ant. 100mm (usage:2 pcs)
AIW-512	2 x Antenna

Note: If Wi-Fi is required, the package must include the module, antenna, and antenna cable.

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.