

ITA-360

Fanless System with 12th/13th Generation Intel® Core™ i Processors for Traffic Management Application

NEW



Specifications


Features

- Intel® 12th/13th generation Core™ i9/i7/i5/i3 Processors
- Support 2 x SO-DIMM slots, up to 64G DDR4
- Support 4 x 2.5G LAN, 4 x USB3.2, 4 x COM ports
- Support 2 x 2.5" storage, 1 x mSATA, 1 x M.2 B key
- Support wide temperature -25 ~ 60 °C
- Support 9 ~ 36V wide range DC input


13th Processor System	CPU	i3-13100T(E)	i5-13500T(E)	i7-13700T(E)	i9-13900T(E)	i3-13100(E)	i5-13500(E)	i7-13700(E)	i9-13900(E)
	Total Cores	4	14	16	24	4	14	16	24
	Total Threads	8	20	24	32	8	20	24	32
	Performance-core Base Frequency (up to)	2.40 GHz	1.30 GHz	1.10 GHz	1.00 GHz	3.30 GHz	2.40 GHz	1.90 GHz	1.80 GHz
	L3 Cache	12 MB	24 MB	30 MB	36 MB	12 MB	24 MB	30 MB	36 MB
	TDP	35 W	35 W	35 W	35 W	60 W	65 W	65 W	65 W
12th Processor System	Operating Temperature	60/65W: -25 ~ 50 °C (with industry SSD, 0.7m/s airflow) 35W: -25 ~ 60 °C (with industry SSD, 0.7m/s airflow)							
	CPU	i3-12100T(E)	i5-12500T(E)	i7-12700T(E)	i9-12900T(E)	i3-12100(E)	i5-12500(E)	i7-12700(E)	i9-12900(E)
	Total Cores	4	6	12	16	4	6	12	16
	Total Threads	8	12	20	24	8	12	20	24
	Performance-core Base Frequency (up to)	2.10 GHz	1.90 GHz	1.40 GHz	1.10 GHz	3.20 GHz	2.90 GHz	2.10 GHz	2.30 GHz
	Cache	12 MB	18 MB	25 MB	30 MB	12 MB	18 MB	25 MB	30 MB
Memory	TDP	35 W	35 W	35 W	35 W	60 W	65 W	65 W	65 W
	Operating Temperature	60/65W: -25 ~ 50 °C (with industry SSD, 0.7m/s airflow) 35W: -25 ~ 60 °C (with industry SSD, 0.7m/s airflow)							
Graphics	Technology	Dual-channel DDR4 2400/2666/3200 MHz SO-DIMM (without ECC)							
	Capacity	Up to 64GB							
Ethernet	Controller	Intel® UHD Graphics 770							
	HDMI	2 x HDMI, support HDMI1.4 standard, max to 3840 x 2160 @ 30Hz							
	DP	2 x Box Header on board							
Storage	Display Option	3 x independent displays (third display output via optional cable)							
	Interface	100/1000/2500 Mbps							
	Controller	4 x Intel I226							
I/O	Connector	4 x RJ-45							
	Internal	1 x mSATA socket 1 x M.2 B key for 2280 SATA SSD							
	External	2 x 2.5" storage bay							
Expansion Slot	SATA	2 x SATA							
	USB	4 x USB3.2 (gen1)							
	LAN	4 x RJ45							
	Serial Port	2 x DB9 (RS232/422/485 with automatic flow control) 2 x DB9 (only RS232)							
	M.2	1 x M.2 B key (SATA/ USB 3.0 signal) for 2280 SATA SSD or 3052 5G module							
	Audio	1 x Speaker out, 1 x Mic-in							
Power	Input Voltage	9 ~ 36V DC in							
Watchdog Timer	Output	System reset							
	Interval	Programmable 1~255 sec/min							
Environment	Operating Temperature	Industry SSD: max to -25 ~ 60 °C (with 0.7m/s airflow)							
	Storage Temperature	-40 ~ 85 °C							
Mechanical Features	Dimension (W x H x D)	185 x 70 x 220 mm							
	Install	Wall mount bracket							
Certifications	EMC	CE/FCC, CCC, BSMI							
	Safety	UL, CCC, BSMI							
OS	Windows	WIN10, WIN11							
	Linux	Ubuntu, Fedora							

Dimensions


Unit: mm [inch]

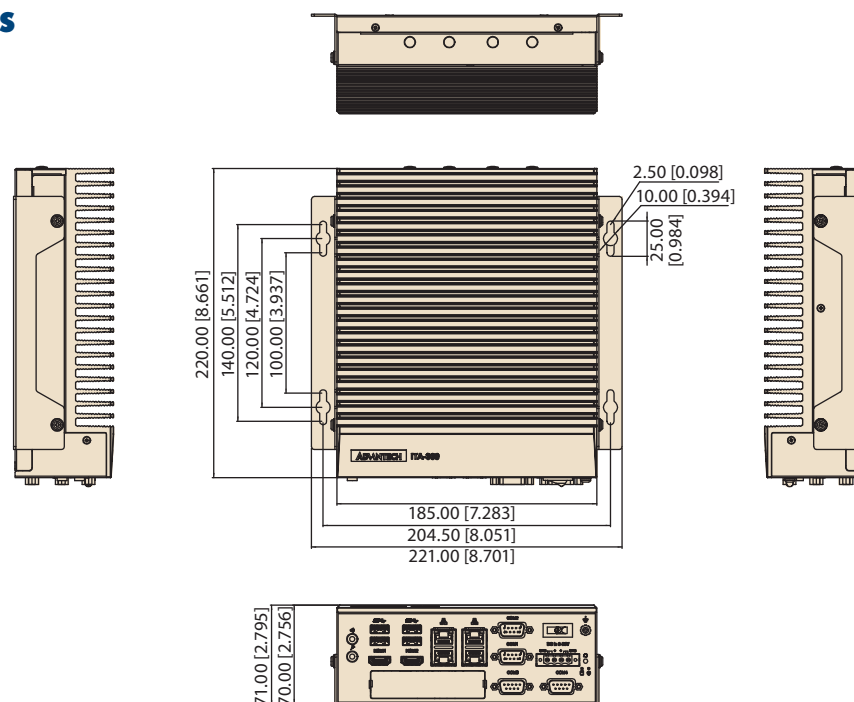

Front View

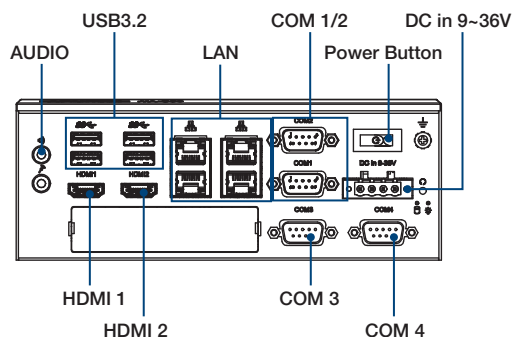

Rear View

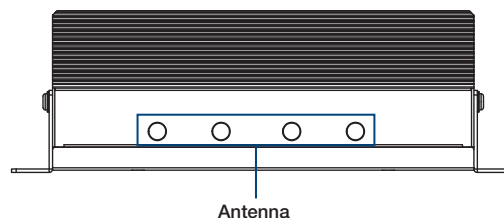

Ordering Information

Part Number	SO-DIMM slots (DDR4)	LAN (RJ-45)	USB3.2	COM	HDMI	M.2	SSD	Msata/MiniPCIe	IDOOR
ITA-360V1-00A1	2	4	4	4	2	1	2	1	1

Optional Accessory

Part Number	Description
96PSA-A230W24P4-3	ADP A/D 100-240V 230W 24V C14 TERMINAL BLOCK 4P
9891B17120E	Econ Package 9891B17120E for 9696B17120E
1700020944-01	F Cable D-SUB 9P(M)x2/IDE#2 20P-2.0 25cm ITA-171
1700024019-01	A CABLE HDMI 19P/2*10P-1.25 22cm
1700028645-01	M CALBE DP 20P(F)/2x10P-1.25+G-TEM 3.2 6CM

Optional Indoor Modules

Part Number	Description
PCM-24R2GL-AE	2 Port Giga LAN Intel i350 PCIe mini card
PCM-26D2CA-AE	SJA1000 CANBus, CANOpen, DB9 x 2
PCM-24U2U3-BE	PCM-24U2U3, 2-Port USB 3.0, mPCIe
PCM-24D2R2-BE	Isolated RS-232, DB9 x 2, (USB type)
PCM-24D2R4-BE	Isolated RS-422/485, DB9 x 2, (USB type)

Packing List

Part Number	Description
1652003234	PLUG-IN BLOCK 4P 5.00mm 90D(F)MC101-50004Y
1960109429N001	Mounting Bracket for ITA-360 Powder 877C

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.