


AIMB-289 A1/A2

Mini-ITX Motherboard 12/13/14th Gen Intel® Core™ Processor

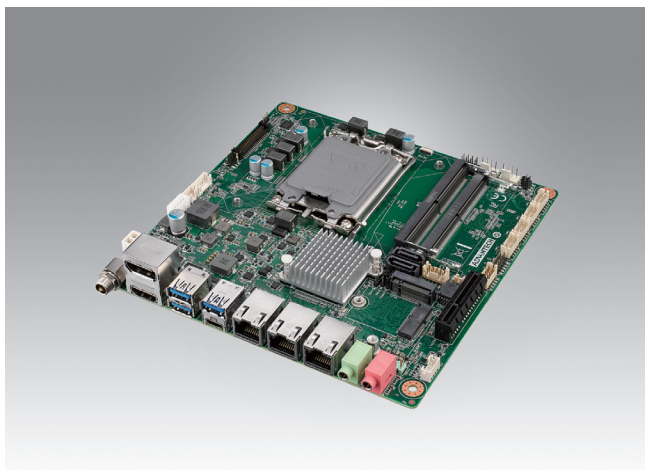

Features


- 12th/13th/14th Gen Intel® Core™ Desktop Processors, Up to 24Core, support H610E chipset
- Up to 96GB DDR5 5600 MT/s with two SO-DIMM
- Super Speed I/O: PCIe x4 Gen3, USB3.2 Gen2 (10Gbps), 2.5GbE
- Triple independent 4K displays with 1 DP, 1 HDMI, 1 LVDS (or eDP)
- TPM2.0 support
- SUSI API, WISE-DeviceOn and Embedded Software



Specifications

14th Generation Processors	CPU	i9-14900	i9-14900T	i7-14700	i7-14700T	i5-14500	i5-14500T	i5-14400	i5-14400T	i3-14100	i3-14100T		
	Core Number	24	24	20	20	14	14	10	10	4	4		
	Base frequency (GHz)	2.0/1.5	1.1/0.8	2.1/1.5	1.3/0.9	2.6/1.9	1.7/1.2	2.5/1.8	1.5/1.1	3.5/NA	2.7/NA		
	Max Speed (GHz)	5.8/4.3	5.5/4.0	5.4/4.2	5.2/3.7	5.0/3.7	4.8/3.4	4.7/3.5	4.5/3.2	4.7/NA	4.4/NA		
	Smart cache (MB)	36	36	33	33	24	24	20	20	12	12		
	TDP (W)	65	35	65	35	65	35	65	35	65	35		
13th Generation Processors	CPU	i9-13900E / i9-13900	i9-13900TE	i7-13700E / i7-13700	i7-13700TE	i5-13500E / i5-13500	i5-13500TE	i5-13400E / i5-13400	i3-13100E / i3-13100	i3-13100TE			
	Core Number	24	24	16	16	14	14	10	4	4			
	Base frequency (GHz)	1.8/2.0	1	1.9/2.1	0.8	2.4/2.6	1.3	2.4/2.5	3.3/3.4	2.4			
	Max Speed (GHz)	5.2/5.6	5	5.1/5.2	4.8	4.6/4.8	4.5	4.6	4.4/4.5	4.1			
	Smart cache (MB)	36	36	30	30	24	24	20	12	12			
	TDP (W)	65	35	65	35	65	35	65	60	35			
12th Generation Processors	CPU	i9-12900E / i9-12900	i9-12900TE	i7-12700E / i7-12700	i7-12700TE	i5-12500E / i5-12500/12400	i5-12500TE	i3-12100E / i3-12100	i3-12100TE	G7400E	G7400TE	G6900E	G6900TE
	Core Number	16	16	12	12	6	6	4	4	2	2	2	2
	Base frequency (GHz)	2.3/2.4	1.1	2.1	1.4	2.9/3.0/2.5	1.9	3.2	2.1	3.6	3	3	2.4
	Max Speed (GHz)	5	4.8	4.8	4.7	4.5/4.6/4.4	4.3	4.2/4.3	4	NA	NA	NA	NA
	Smart cache (MB)	30	30	25	25	18	18	12	12	6	6	4	4
	TDP (W)	65	35	65	35	65	35	60	35	46	35	46	35
Processor System	Chipset	H610E											
	BIOS	AMI EFI 256 Mbit SPI											
Expansion Slot	M.2	A1: 1 x B-Key(2242/3042, for SSD & 4G) + 1 x E-Key(2230, for Wifi/BT) A2: 1 x M-Key(2242/3042, for SSD & 4G) or 1 x B-Key by option + 1 x E-Key(2230, for Wifi/BT)											
	PCIe x4	1 x PCIe x4 Gen3											
Memory	Technology	Dual Channel DDR5, up to 5600 MT/s (non-ECC)											
	Max. Capacity	96GB (up to 48GB per DIMM)											
	Socket	2 x 262 pin DDR5 SO-DIMM											
Graphics	Controller	Intel® UHD Graphics 770											
	HDMI	1 x HDMI 2.1 TMDS, up to 4096 x 2160 @ 60 Hz											
	DP	1 x DP1.4b, up to 4096 x 2160 @ 60 Hz											
	eDP	1 (by Option) up to 4096 x 2160 @ 60 Hz (colay with LVDS)											
	LVDS	1 (by default) up to 1920 x 1200 @ 60 Hz											
	Multi Displays	Triple independent display. DP + HDMI + LVDS (or eDP)											
Network	ETHERNET	10/100/1000/2500 Mbps											
	Controller	LAN1: 2.5 GbE Intel i226-V LAN 2: 2.5 GbE Intel i226-V LAN 3: 2.5 GbE Intel i226-V											
	Connector	3 x RJ45											
Audio	Codec	Realtek ALC888S, High Definition Audio (HD), Line-Out (default)											
	Amplifier	Yes (Option, 3.0W)											
SATA	Max data transfer rate	6.0 Gb/s											
	Channel	2 (SATA III)											
Rear I/O	DP	1											
	HDMI	1											
	Ethernet	3											
	USB	2 x USB 3.2 Gen1x1 + 1 x USB 3.2 Gen2x1 + 1 x USB 3.2 Gen2 Type-C (Full SKU)											
	Audio	1 (Line out/Mic in)											
Internal Connector	USB	4 x USB2.0											
	LVDS/eDP	1 (LVDS colay with eDP)											
	Serial	4 (COM1 RS-232, supports 5V/12V by jumper selection, COM2 & 3 RS232/422/485, COM4 RS-232)											
	SATA	2											
	M.2	A1: 1 x B-Key(2242/3042, for SSD & 4G) + 1 x E-Key(2230, for Wifi/BT) A2: 1 x M-Key(2242/3042, for SSD & 4G) or 1 x B-Key by option + 1 x E-Key(2230, for Wifi/BT)											
Watchdog Timer	GPIO	8-bit											
	Output	System reset											
	Interval	Programmable 1 ~ 255 (second or minute)											
Power Requirements	Input voltage	12-24V DC-in											
	Connector	DC Jack											
	Power consumption	Configuration	Intel® Core™ i9-14900, 2pcs 48 GB DDR5 5600 MT/s										
		Max.	133W										
		Typical	96W										
Physical Characteristics	Dimensions	170 mm x 170 mm (6.69" x 6.69")											
Environment	Temperature	Operating: 0 ~ 60 °C (32 ~ 140 °F)											
	Storage	Non-Operation: -40 ~ 85 °C (-40 ~ 185 °F)											

Block Diagram

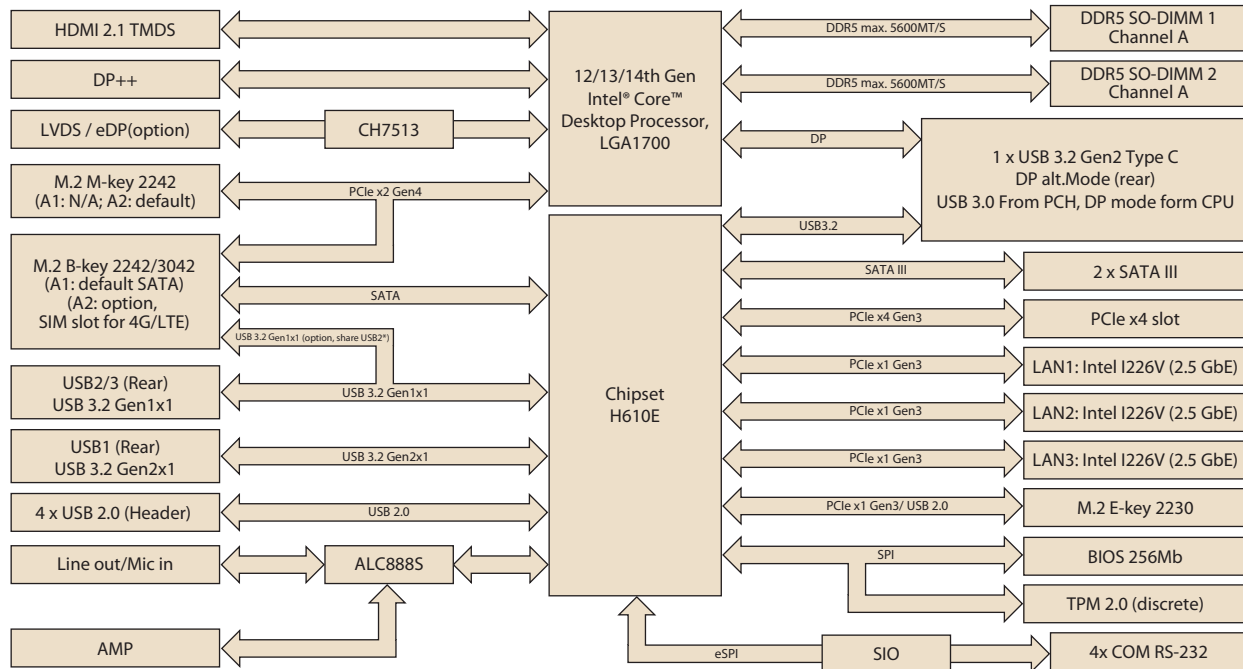

Ordering Information

A1

Part Number	Chipset	HDMI	LVDS/ eDP	DP	2.5GbE	COM	SATAIII	USB Type-C	USB3.2	USB2.0	M.2 E key	M.2 M key	M.2 B key	PCIex4	TPM	AMP
AIMB-289HF-LDA1	H610E	1	1/(1)	1	3	4	2	1	2 x USB3.2 Gen1x1 1 x USB3.2 Gen2x1	4	1	-	1	1	1	(1)
AIMB-289HL-EDA1	H610E	1	(1)/1	1	2	2/(2)	2	-	2 x USB3.2 Gen1x1 1 x USB3.2 Gen2x1	4	1	-	1	1	(1)	(1)

A2

Part Number	Chipset	HDMI	LVDS/eDP	DP	2.5GbE	COM	SATAIII	USB Type-C	USB3.2	USB2.0	M.2 E key	M.2 M key/B key	PCIex4	TPM	AMP
AIMB-289HF-LDA2	H610E	1	1/(1)	1	3	4	2	1	2 x USB3.2 Gen1x1* 1 x USB3.2 Gen2x1	4	1	1/(1)**	1	1	(1)

() Supports by BOM options

*M.2 B key USB 3.2 signal (option) co-design with one USB 3.2 in rear side.

** M.2 M key and B key is co-design.

Packing List

Part Number	Description	Quantity
19350304A0	Screw M3x4L	2
1700018785	SATA power cable	1
1700034404-02	1-to-1 serial port cable, 50cm	1
1700003194	SATA HDD cable	1
1960116395T001	I/O port bracket	1
1700023082-11	ATX 2*10P to 1*3P-2.0 15cm cable	1

Optional Accessory

Part Number	Description
1700034405-01	1-to-2 USB 2.0 cable, 50cm
1970005349T001	LGA1700 CPU Cooler H: 55.4mm (for TDP 65W)
1970005672T001	LGA1700 CPU Cooler H: 32mm (for TDP 35W)

I/O View



Embedded OS/API

OS/API	Part Number	968 P/N	Description
Win 11	20706WLE1S0022	968QW1124ELOXE	img W11 24EL AIMB-289 64b 24H2 ENU
Win 11	20706WLH1S0022	968QW1124HLOXE	img W11 24HL AIMB-289 64b 24H2 ENU
Win 11	20706WLV1S0022	968QW1124VLOXE	img W11 24VL AIMB-289 64b 24H2 ENU
Win 10	20706WX1ES0120	968QW21ELE	img W10 21EL AIMB-289 64b 21H2 ENU
Win 10	20706WX1HS0120	968QW21HLE	img W10 21HL AIMB-289 64b 21H2 ENU
Win 10	20706WX1VS0120	968QW21VLE	img W10 21VL AIMB-289 64b 21H2 ENU
Ubuntu 22.04	20706U22DS0060	968MOU204D	img UbuntuD AIMB-289 64b 22.04 ENU
Ubuntu 24.04	20706U24DS0004	968MOU204D	img UbuntuD AIMB-289 64b 24.04 ENU

Optional Chassis

Part Number	Description
EPC-B2000-AC00	Mini-ITX Chassis

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.