

UTC-307

7" Ubiquitous Touch Computer UTC-307J with Celeron® J6412



Features

- Low power and fanless system design
- Built-in Celeron® J6412 (UTC-307J)
- 7" monitor with 16:9 widescreen display
- IP65-rated front panel for water and dust resistance
- Supports both landscape and portrait screen orientations
- VESA 75 mm standard mounting holes for varied mounting demands
- Detachable plastic frame design for panel mount applications
- Support TPM 2.0



Introduction


UTC-307 features an all-in-one computing system equipped with wide format, touch based LCD panel. It is easy to integrate key peripherals and display systems for diversified self-service and interactive signage deploy in different application areas. The systems deliver updated information with well-designed interactive interfaces, fully ensure relevant content and targeted promotions are delivered. UTC series touch panel computers are the best investments to enhance user satisfaction, further brand equity, and maximize business profits.

Specifications

Processor System	CPU	Intel® Celeron® J6412 (UTC-307J)
	Base Frequency	2.0 GHz (Quad-Core)
	Cache	L2 Cache 1.5MB
	Memory	DDR4-3200 up to 32GB
	Storage	1 x M.2 2242 SSD
	Network (LAN)	2 x Gigabit Ethernet ports (Supports Wake on LAN)
	I/O ports	2 x RS-232 COM (COM2 RS-232/422/485)
		2 x USB3.0
		2 x Gigabit Ethernet ports
	Stereo Speaker	1 x 2W
	Bus expansion	1 x M.2 key2230, 1 x M.2 key2242
	Mounting	VESA 75 x 75 mm (Screw Size, M4, 4mm)
	Dimensions (W x H x D)	185 x 121 x 32 mm
	Weight	0.95kg (2.09lbs)
Security		Support TPM2.0
OS Support		Windows 10 IoT Enterprise 2021
		Windows 11 IoT Enterprise LTSC
		Android12
		Linux
Environmental Specifications	Operating Temperature	0 ~ 40 °C (32 ~ 104 °F)*
	Relative Humidity	10 ~ 95% @ 40 °C non-condensing
	Vibration	0.5G
	Shock	10G peak acceleration (11 msec. duration)
	Certification	CE, FCC, CB, UL, CCC, BSMI
	Front Panel Protection	IP 65 Compliant
Power Supply	DC Input Rating	12 V/3 A ~ 24 V/1.5 A, 36W ITE Adapter
	Power consumption	Typical 21.5W Max 28W
LCD Display	Size/Type	7" TFT LCD with LED backlight
	Max.Resolution	800 x 480
	Max. Color	262K
	Pixel Pitch (um)	192.6 x 179
	Brightness (cd/m²)	450
	View Angle	140°/ 160°
Touch Screen Option (PE/GE)	Type	Projected Capacitive. Glass panel (by required)
	Light Transmission	80% ± 5% / 90%
	Controller	USB Interface

Dimensions

Unit: mm

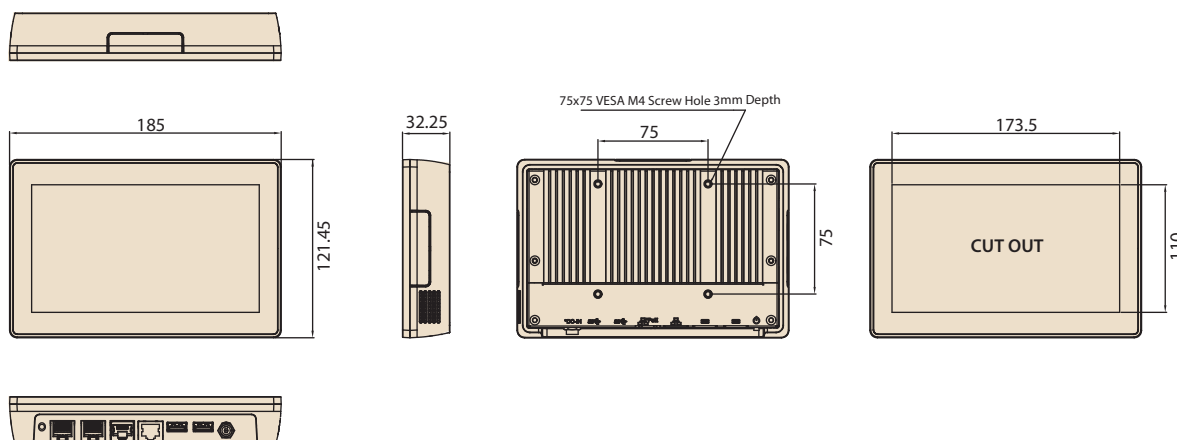

Ordering Information

Part No.	Description
UTC-307JP-ATB1E	7" Pcap, J6412, 8G RAM, Black
UTC-307JP-ATW1E	7" Pcap, J6412, 8G RAM, White
UTC-307JP-USB1E	7" Pcap, J6412, 8G RAM, Black, Made in Taiwan
UTC-307JP-USW1E	7" Pcap, J6412, 8G RAM, White, Made in Taiwan
1700001524	Power Cord 3P UL 10A 125V 180cm
170203180A	Power Cord 3P UK 2.5A/3A 250V 1.83M
170203183C	Power Cord 3P Europe (WS-010+WS-083)183cm
1700019146	Power Cord CCC 3P 2.5A 250V 183cm
1700025928-02	COM Port Converter cable RJ48-10P10C to D-SUB 9P 35cm

* UTC-307 PN (UTC-307JP-ATXXX) include the system and the 36W power adapter (96PSA-A36W12W7-5)

Peripherals for UTC-307 series


Tentative Part No.	Description
UTC-300P-M70E	Magnet Strip Reader, White, for UTC-307/UTC-310 series
UTC-300P-M71E	Magnet Strip Reader, Black, for UTC-307/UTC-310 series
UTC-300P-R70E	RFID Reader, White, for UTC-307/UTC-310 series
UTC-300P-R71E	RFID Reader, Black, for UTC-307/UTC-310 series
UTC-300P-B70E	2D Barcode Reader, White, for UTC-307
UTC-300P-B71E	2D Barcode Reader, Black, for UTC-307
UTC-300P-L70E	LED Light Bar, for UTC-307/UTC-310 series
UTC-300P-W72E	UTC-307 M.2 Wi-Fi(159),2T2R,BT5.0,A-E key

* All peripherals must be ordered together with UTC-307, and assembled by Advantech only

Installation Accessory

Part No.	Description
UTC-WALL-MOUNT5E	UTC VESA mount (75x75)
UTC-PANEL-MOUNT2E	PANEL Mount Kit (UTC-307)
UTC-TABLE-STAND0E	Table Stand, White, For UTC-307/310
UTC-TABLE-STAND1E	Table Stand, Black, For UTC-307/310

Fully- Integrated I/O

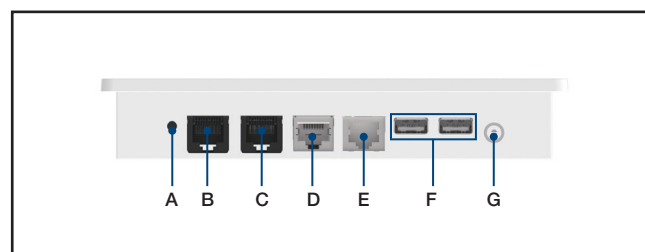

- A. POWER BUTTON
- B. COM W/RS-232
- C. COM W/RS-232/422/485
- D. LAN Port
- E. LAN
- F. USB 3.0 x 2
- G. DC Power Jack

OS Information

Part No.	Description
20708WX1ES0027	Img WIN10 LTSC-21-ELE UTC-307J/310J V1.00 7MUI
20708WLE1S0007	WIN11 LTSC_24H2 ELE UTC-307/310J V1.00 7MUI
20708AI0NS0060	UTC-307J/310J Android 12 image V0.5.7

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při
objednávce nad 10 000 Kč bez DPH
nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače
s možností jejího prodloužení
až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují
za nižší ceny. Výše slevy se odvíjí
od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme
rozšířenou podporu a servis s garancí
výměny zařízení do 48 hodin.