

# AIMB-506A3

## Micro-ATX Motherboard 8th/9th Gen Intel® Core™ Processor LGA1151



### Features

- Supports Intel® 8th/9th Gen Core i7/i5/i3 processor with H310 chipset
- Supports up to 14 x COM, 8 x USB 3.0, 12 x USB 2.0, TPM 2.0
- Supports Dual display of VGA, DP, DVI, eDP, LVDS (optional) and two GbE LAN
- Two DIMM sockets support up to 64 GB DDR4 2666 MHz SDRAM
- Supports WISE PaaS/Device-On, McAfee, Acronis and Embedded Software APIs

#### Software APIs:




#### Utilities:



### Specifications

|                          |  |  |                      |                        |                      |                        |                      |                         |                         |  |
|--------------------------|--|--|----------------------|------------------------|----------------------|------------------------|----------------------|-------------------------|-------------------------|--|
| Processor System         | CPU  | I7-9700E/<br>I7-9700TE   | I7-8700/<br>I7-8700T | I5-9500E/<br>I5-9500TE | I5-8500/<br>I5-8500T | I3-9100E/<br>I3-9100TE | I3-8100/<br>I3-8100T | Pentium<br>G5400/G5400T | Celeron<br>G4900/G4900T |  |
|                          | Core Number  | 8/8  | 6/6                  | 6/6                    | 6/6                  | 4/4                    | 4/4                  | 2/2                     | 2/2                     |  |
|                          | Max. Speed   | 2.6GHz/<br>1.8GHz  | 3.2 GHz/<br>2.4 GHz  | 3.0GHz/<br>2.2GHz      | 3.0 GHz/<br>2.1 GHz  | 3.1GHz/<br>2.2GHz      | 3.6GHz/<br>3.1GHz    | 3.7GHz/<br>3.1GHz       | 3.1GHz/<br>2.9GHz       |  |
|                          | L3 Cache   | 12MB/12MB  | 12MB/12MB            | 9MB/9MB                | 9MB/9MB              | 6MB/6MB                | 6MB/6MB              | 4MB/4MB                 | 2MB/2MB                 |  |
|                          | TDP (W)  | 65W/35W  | 65W/35W              | 65W/35W                | 65W/35W              | 65W/35W                | 65W/35W              | 58W/25W                 | 54W/35W                 |  |
|                          | Chipset  | H310   |                      |                        |                      |                        |                      |                         |                         |  |
|                          | BIOS   | AMI EFI 128 Mbit SPI   |                      |                        |                      |                        |                      |                         |                         |  |
| Expansion Slot           | PCI  | 32-bit/33 MHz, 2 slot (F sku; G2 sku)  |                      |                        |                      |                        |                      |                         |                         |  |
|                          | PCIe x1 (Gen3)   | 1 GB/s per direction, 1 slot   |                      |                        |                      |                        |                      |                         |                         |  |
|                          | PCIe x16 (Gen3)  | 16 GB/s per direction, 1 slot  |                      |                        |                      |                        |                      |                         |                         |  |
| Memory                   | Technology   | Dual Channel DDR4 2666 MHz SDRAM   |                      |                        |                      |                        |                      |                         |                         |  |
|                          | Max. Capacity  | 64 GB/32 GB per DIMM   |                      |                        |                      |                        |                      |                         |                         |  |
|                          | Socket   | 2 x 288-pin UDIMM (Non-ECC)  |                      |                        |                      |                        |                      |                         |                         |  |
| Graphics                 | Controller   | Intel HD Graphics  |                      |                        |                      |                        |                      |                         |                         |  |
|                          | LVDS   | Supports dual channel 48 bit and up to 1920 x 1200 @ 60 Hz (optional)  |                      |                        |                      |                        |                      |                         |                         |  |
|                          | eDP  | Internal pin header, supports max. resolution 3840 x 2160 @ 60 Hz (F sku on board, G2 sku optional)  |                      |                        |                      |                        |                      |                         |                         |  |
|                          | VGA  | Yes, Max resolution 1920 x 1200 @ 60 Hz  |                      |                        |                      |                        |                      |                         |                         |  |
|                          | DP   | Supports max resolution 4096 x 2304 @ 60 Hz  |                      |                        |                      |                        |                      |                         |                         |  |
|                          | DVI-D  | Up to 1920 x 1200 @ 60Hz refresh rate  |                      |                        |                      |                        |                      |                         |                         |  |
| Ethernet                 | Dual Display   | DP+DVI-D, DP+VGA, DVI-D+VGA, DP+eDP (LVDS), DVI-D+eDP (LVDS), VGA+eDP (LVDS)   |                      |                        |                      |                        |                      |                         |                         |  |
|                          | Interface  | 10/100/1000 Mbps   |                      |                        |                      |                        |                      |                         |                         |  |
| SATA                     | Controller   | GbE LAN1: Realtek 8111K<br>GbE LAN2: Realtek 8111K   |                      |                        |                      |                        |                      |                         |                         |  |
|                          | Connector  | RJ-45 x 2  |                      |                        |                      |                        |                      |                         |                         |  |
| Rear I/O                 | Max Data Transfer Rate   | 600 MB/s (SATA 3.0)  |                      |                        |                      |                        |                      |                         |                         |  |
|                          | Channel  | 3  |                      |                        |                      |                        |                      |                         |                         |  |
|                          | VGA  | 1  |                      |                        |                      |                        |                      |                         |                         |  |
|                          | DVI-D  | 1  |                      |                        |                      |                        |                      |                         |                         |  |
|                          | Ethernet   | 2 (F, G2 x2)   |                      |                        |                      |                        |                      |                         |                         |  |
| Internal Connector       | USB  | 12 (8 USB 3.0, 4 USB 2.0 on F sku)<br>8 (4 USB 3.0, 4 USB 2.0 on G2)   |                      |                        |                      |                        |                      |                         |                         |  |
|                          | Display port   | 1 (F and G2 only)  |                      |                        |                      |                        |                      |                         |                         |  |
|                          | Audio  | 2 (Mic-In, Line-out)   |                      |                        |                      |                        |                      |                         |                         |  |
|                          | USB  | 8 ( F sku, 8 USB 2.0)<br>4 (G2, 4 USB 2.0)   |                      |                        |                      |                        |                      |                         |                         |  |
|                          | Serial   | 14 (F-00 sku: 12 x RS-232, 2 x RS-232/422/485; COM 3 and COM 7 support RS-232/422/485 auto flow control; COM1 and COM 2 support 5V/12V by jumper selection)<br>10 (G2-00 sku: 8 x RS-232, 2 x RS-232/422/485; COM 3 and COM 7 support RS-232/422/485 auto flow control; COM1 and COM 2 support 5V/12V by jumper selection) |                      |                        |                      |                        |                      |                         |                         |  |
|                          | M.2 (B Key)  | 1 (2242/3042 with SIM card holder, F and G2 sku only)  |                      |                        |                      |                        |                      |                         |                         |  |
|                          | SATA   | 3 x 600 MB/s (SATA 3.0)  |                      |                        |                      |                        |                      |                         |                         |  |
| Watchdog Timer           | Extended Display Port (eDP)/LVDS   | 1 (F sku only; Default: eDP)   |                      |                        |                      |                        |                      |                         |                         |  |
|                          | GPIO   | 16-bit GPIO  |                      |                        |                      |                        |                      |                         |                         |  |
|                          | PS/2 (KBMS1)   | 1  |                      |                        |                      |                        |                      |                         |                         |  |
| Power Requirements       | Output   | System reset   |                      |                        |                      |                        |                      |                         |                         |  |
|                          | Interval   | Programmable 1 ~ 255 sec/min   |                      |                        |                      |                        |                      |                         |                         |  |
| Environment              | Operation  | +5V  | 3.3V                 | 12V                    | 12V_4P               |                        |                      |                         |                         |  |
|                          | Configuration: Intel® Core™ i7-9700E 8-Core Processor 2.6GHz, with UDIMM DDR4 2666 16GB*2pcs | 1.27771A   | 1.22934A             | 0.60099A               | 11.2426A             |                        |                      |                         |                         |  |
|                          | Standby (5Vsb)   | 2A   |                      |                        |                      |                        |                      |                         |                         |  |
| Physical Characteristics | Operating  | 0 ~ 60° C (32 ~ 140° F), depends on CPU speed and cooler solution  |                      |                        |                      |                        |                      |                         |                         |  |
|                          | Temperature  | 244 mm x 244 mm (9.6" x 9.6")  |                      |                        |                      |                        |                      |                         |                         |  |

## Block Diagram

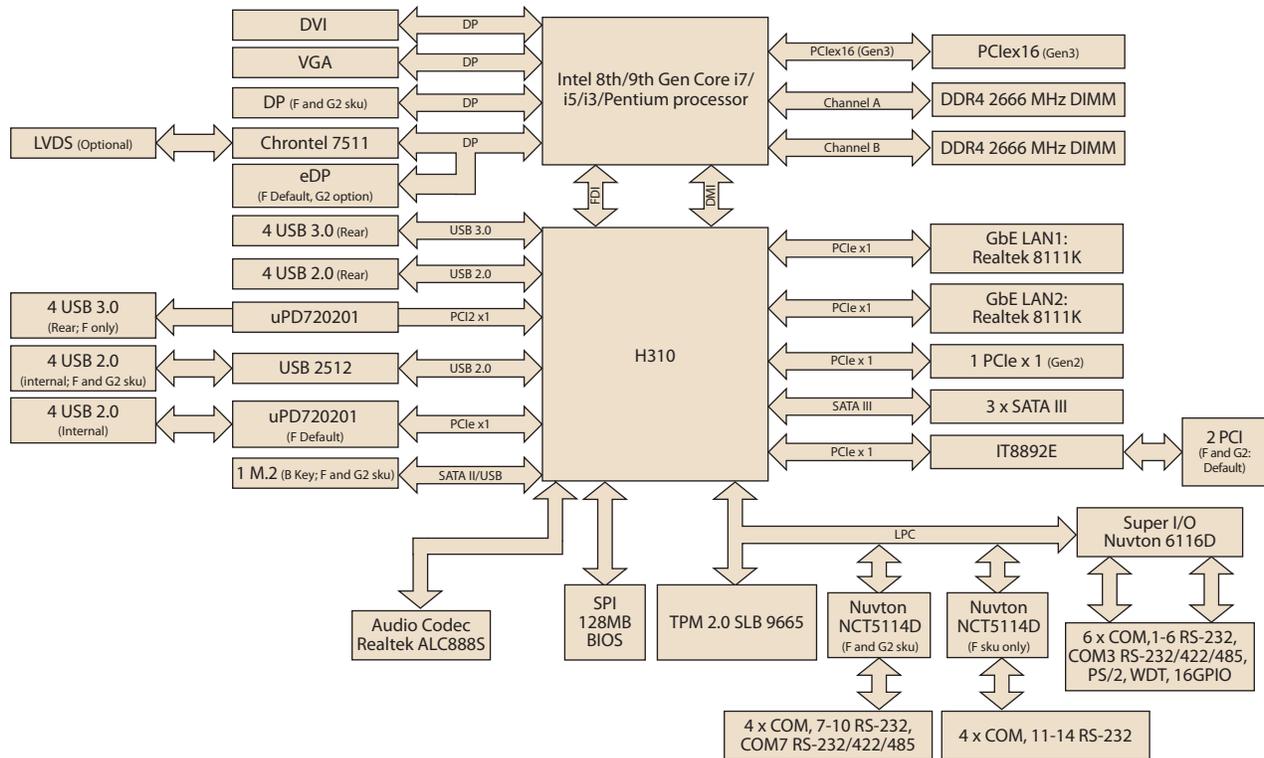

## Ordering Information

| Part Number      | PCH  | Memory  | VGA | DVI | DP | eDP/LVDS | USB 3.0/2.0 | COM | SATA | LAN | PCIe x 16 | PCIe x 1 | M.2 B-Key | PCI slot | AMP |
|------------------|------|---------|-----|-----|----|----------|-------------|-----|------|-----|-----------|----------|-----------|----------|-----|
| AIMB-506F-00A3E  | H310 | Non ECC | 1   | 1   | 1  | 1/(1)    | 8/12        | 14  | 3    | 2   | 1         | 1        | 1         | 2        | 1   |
| AIMB-506G2-00A3E | H310 | Non ECC | 1   | 1   | 1  | (1)/(1)  | 4/8         | 10  | 3    | 2   | 1         | 1        | 1         | 2        | 1   |

\*( ) BOM options available on MP version.

## Riser Card

| Part Number      | Description                             |
|------------------|---|
| AIMB-RP10P-01A1E | 1U riser card with 1 PCI expansion      |
| AIMB-RP30P-03A1E | 2U riser card with 3 PCI expansion      |
| AIMB-RF10F-01A1E | 1U riser card with 1 PCIe x16 expansion |

## Packing List

| Part Number         | Description                    | Quantity |
|---------------------|--------------------------------|----------|
| 1930006770-01       | M.2 screws                     | 2        |
| 1700003194-21       | Serial ATA HDD data cable      | 2        |
| 17AD14GS1400013V04* | 1-to-4 COM cable 50cm          | 1        |
| 1700031615-02       | 1-to-2 serial port cable, 50cm | 1        |
| 1960094997T001      | I/O port bracket               | 1        |
| 2046050600          | Startup manual                 | 1        |

\*Only for F and G2 Sku.

## I/O View



## Optional Accessories

| Part Number    | Description   |
|----------------|---|
| 1960053207N001 | LGA1150 CPU cooler for CPU TDP 65W, 92.9 (W) x 92.9 (L) x 46 (H) mm |
| 1960060732N001 | LGA1150 CPU cooler for CPU TDP 45W, 80 (W) x 80 (L) x 32.2 (H) mm   |
| 1700000447     | 1-to-4 serial ports cable kit, 45cm                                 |
| 1701400181     | 1-to-4 serial ports cable kit, 18cm                                 |
| 1700002204     | Dual port USB 2.0 cable 27cm with bracket                           |
| 1700018699     | 1-to-2 PS/2 KB/MS cable cable 25cm                                  |

Note: Purchasing AIMB-506's proprietary CPU cooler from Advantech is a must; other brands of CPU coolers are NOT compatible with AIMB-506.

## Embedded OS/API

| OS/API        | Part No        | Description   |
|---------------|----------------|---|
| Win10 IoT EnT | 20706WX9HS0057 | img W10 19HL  |
|               | 20706WX9VS0061 | img W10 19VL  |
|               | 20706WX9ES0071 | img W10 19EL  |
| Ubuntu20.4    | 20706U20DS0044 | Ubuntu Desktop 20.04 LTS 64bit Image & license sticker for AIMB-506 |

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



### POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



### AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



### PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



### NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



### INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



### MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



### SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.