FWA-6183

Rackmount Network Appliance with Dual AMD EPYC™ 9004 Processors for Gateway and NGFW



Features

- Dual AMD EPYC™ 9004 Processors, up to 256 Cores
- 16 x DDR5 ECC RDIMM slots
- Hot-swap 2.5" disk bays and system fan, redundant PSU, 1 x HH/HL Gen5 PCIe x16 slot
- Integrated security features with root of trust, memory encryption, and encrypted virtualization
- IPMI v2.0 compliant, with web interface
- 8 x Advantech network module expansions w/ PCIe Gen5 bandwidth

Specifications


System P/N		FWA-6183-00A1R
Form Factor		2U Rack Mount
Processor System	Processor	4th Generation AMD EPYC™ Processors
	Core Count	Up to 128C
	Base Frequency	Up to 4.1 GHz
	BIOS	AMI UEFI
Memory	Technology	DDR5, up to 4800 MT/s
	Max. Capacity	1024 GB (64 GB per slot)
	Socket	16 x 288-pin DIMM
	ECC Support	RDIMM
Networking	Controller	2 x Intel i210
	1GbE	2 x 1GbE RJ45
Expansion Slot	PCIe x16	1 x PCIe Gen5 x16 HH/HL
	NMC	8 x PCIe Gen5 x8
IPMI		IPMI 2.0 and Redfish compliant
Storage	2.5" Bay	2 x External 2.5" HDD/SSD
	M.2	2 x M.2 2280 M-Key for SATA SSD or PCIe Gen3 x4 NVMe
I/O	Console	1 x RJ45 type console
	USB	2 x USB 3.0
	LED Indicator	1 x Power LED, 1 x Alert LED, 1 x Locate LED, 1 x Software-defined LED
	Display	1 x VGA port
	Button	1 x Power button, 1 x Software-defined button
	Others	1x dedicated 1GbE LAN for IPMI
TPM		TPM 2.0
LCD Module		16 x 2 graphic display, 5 buttons
Power Supply	Power Type	AC Redundant CRPS (Option: DC Redundant CRPS)
	Watts	1200 W
	Input	AC: 100-240V~, 12-7A, 50-60Hz (Option: DC -48V)
	Connector	AC 3pin plug
Environment	Operating Temperature	0 ~ 40 °C (32 ~ 104 °F)
	Non-operating Temperature	-40 ~ 70 °C (-40 ~ 158 °F), 60 °C@95% Non-Condensing Humidity
	Vibration Resistance (Operation)	5-500 Hz, 0.3 Grms, 3 axes, 1 hr/per axis
	Shock Protection (Operation)	10 G, 11 ms
Cooling		4 x Hot swap 8038 mm fan
Mechanical	Metallic Material	SGCC
	Mounting	Rackmount
	Dimensions (W x H x D)	438 x 88 x 600 mm (17.2" x 3.4" x 23.6")
	Weight (G.W.)	23.5 kg (51.8 lbs)
OS Support		Linux (CentOS, Red Hat, Ubuntu, Fedora)
Advantech S/W Packages		1. ALBPCU 2. APOECU 3. ipmitool 4. Server iManager (Linux base) -Health Guard -Diagnostic Framework -Network device identifier (NDI) 5. Quick Start Linux Image
Certification	EMC/Safety	CE, FCC, CB, UL, CCC

All product specifications are subject to change without notice.


Last updated: 25-Apr-2025

Dimensions


Unit: mm

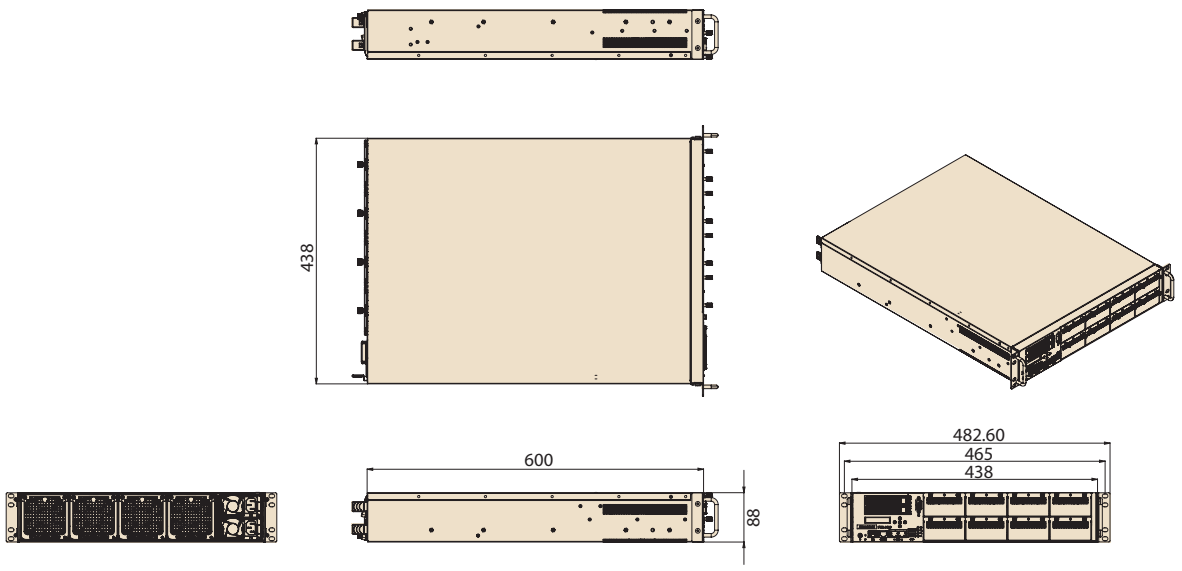

Front Panel External I/O Mechanical Layout/Drawing

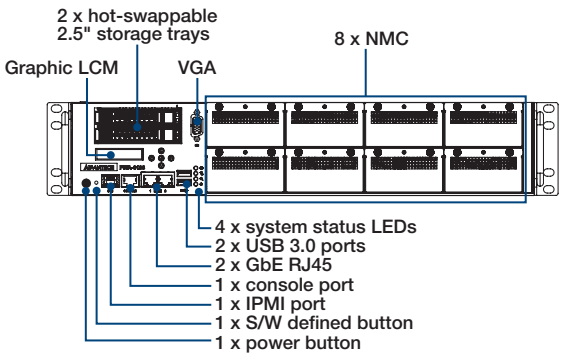

Rear Panel External I/O Mechanical Layout/Drawing

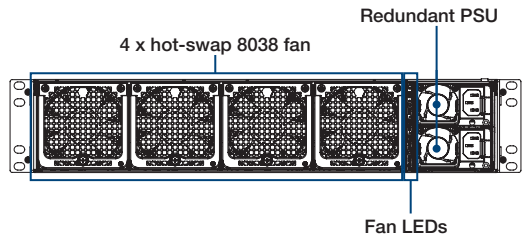

Ordering Information

Part Number	Processor	DDR5	NMC Slot	PCIe Slot	Storage Bay	USB3.0	IPMI Port	Console Port	LAN Port			System Fan	PSU
									1G RJ45	1G SFP	10G SFP+		
FWA-6183-00A1R	Dual socket, 4th Generation AMD EPYC™ processors	16	8	1	2	2	1	1	2	0	0	4	2

Packing List

Part Number	Description	Quantity
1700020691-01	M CABLE D-SUB 9P(F)/RJ45 220cm	1
1970005850T001	CPU Heatsink	1
1930008928	Screws for slide rail installation	10
1930007259-01	Screws for mounting ear	4
1960083584N021	Mounting ear	2

Optional Accessories

Part Number	Description
1702002600	Power cord 3P 180 cm, USA
1702002605	Power cord 3P 180 cm, Europe
1702031801	Power cord 3P 180 cm, UK
1700000237	Power cord 3P 180 cm, JP
1700009652	Power cord 3P 180 cm, China
1930008928	Screws for slide rail installation (Order 10 pieces per system
968DE00026	Slide rail for post to post dimension 558.9 - 850.9mm
FWA-3050-800WPSU	800W DC Power kit
1700027334-01	USB for RJ45 console cable, 190cm

Online Download www.advantech.com/products

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.

IPC AutoCont

AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

Uhlířská 1064/3, 710 00 Ostrava, Česká republika

obchod@autocont-ipc.cz +420 733 688 944 www.autocont-ipc.cz

PRŮMYSLOVÉ POČÍTAČE *fanless embedded PC, do racku, ...*

POČÍTAČE S DISPLEJEM *panelové PC, terminály, do vozidel, ...*

AUTOMATIZACE A SBĚR DAT *převodníky, karty, moduly, switche, ...*

PERIFERIE A KOMPONENTY *monitory, klávesnice, desky, skříně, ...*

NOTEBOOKY A TABLETY *odolné, windows, android, IP65, ...*

INFORMAČNÍ KIOSKY *interiérové, venkovní, ...*

MEDICÍNSKÁ TECHNIKA *počítače, tablety, LCD, klávesnice, ...*

SOFTWAROVÁ ŘEŠENÍ *pro výrobu, zaměstnance, kiosky, ...*

PŘEJÍT DO E-SHOPU *eshop.autocont-ipc.cz*

DOPRAVA ZDARMA
Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.

PRODLOUŽENÁ ZÁRUKA
Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.

ODMĚNA ZA VĚRNOST
Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obratu.

SERVIS ON-SITE A IN-TIME
K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.