


- Industrial Monitor in metal cased
- Fanless solution
- Display LCD 46" Full HD - LED backlight
- Resolution UXGA 1920 x 1080
- IP65 on front panel
- Laminated glazing 6.7 mm non glare
- Compatible with all PC: VGA - DVI-D Input
- Internal industrial power supply
- Available with IR Multi-touch touch screen



Metal chassis
IP65 on front




I/O protection trap







Fanless chassis

I/O ports


- 1 - DVI-D
- 2 - VGA
- 3 - USB (Touch screen)
- 4 - COM 3 option
- 5 - ATX switch button
- 6 - Keylock

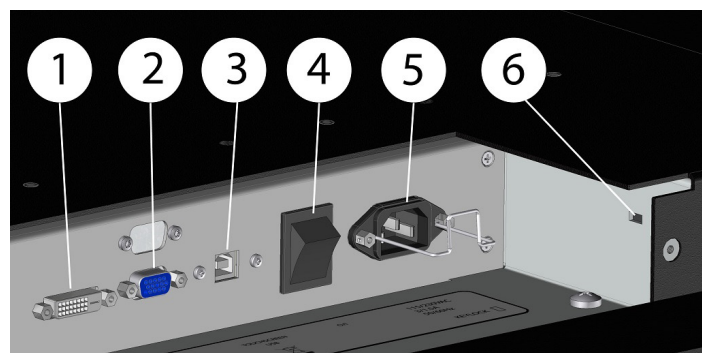

Mechanical Drawing

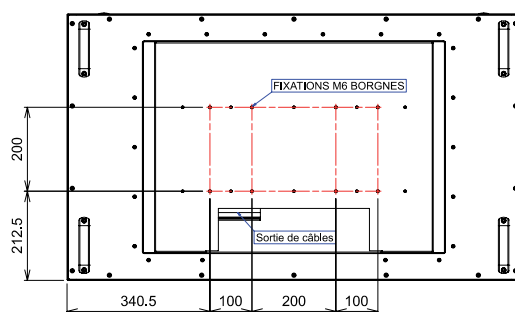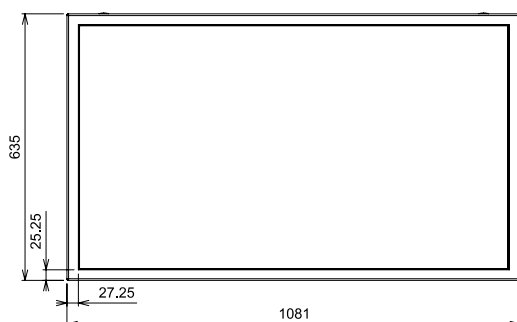

Chassis	Construction Chassis	2 mm thick
	Colors	black paint RAL-9005
	Mounting	VESA 200x200 / VESA 400x200 compatible
	Anti-reflection Glass	6.7mm laminated glazing - non glare no touch version
	Protection	IP65 on front panel
Display	LCD Size	46" - Full HD - 16:9
	Active area	1018 x 572 mm
	Resolution	1920 x 1080 UXGA
	LCD Color	16.7 millions
	Pixel Pitch	0.53 mm
	Brightness	500 cd/m2
	Contrast Ratio	3000 : 1
	Viewing Angle	+/- 89°
Touch Screen	Technology	IR Multitouch (6 touch)
I/O (trap protection)		1 x VGA
		1 x DVI-D
		1 x USB
		1 x Keylock
Button / Indicator	Under trap protection	ATX On/Off switch button
		Power Led
		Brightness control keypad
		Control monitor button (OSD)
Others		Remote control - Mouse type
System Cooling		Fanless
Dimensions	Dimension WxHxD (mm)	1081 x 635 x 110.8
	Weight (kg)	40
Industrial Power Supply	AC~	115/230VAC - 3/1.5A - 50/60Hz. Power consumption: 120 W max.
Safety & EMC	Security	EN60950-1
	EMC	EN55022, EN61000-3-2, EN61000-3-3, EN55024, EN-61000-4-2, EN-61000-4-3, EN-61000-4-4, EN-61000-4-5, EN-61000-4-6, EN-61000-4-8, EN-61000-4-11
Environnement	Operating Temperature	0° ~ + 35°C
	Storage Temperature	- 20 + 60°C
	Relative Humidity	5 95 %
Warranty	2 years Parts & Labour return to base as standard	
Options & Accessories	IR (in end of items serie)	Multitouch IR touch screen
	XSUPPORTMUR/26-52	Wallmount support - security lock possible
	XSUPPORTPLAF/32-60	Ceiling mount solution



Ordering Information

ELIOS 46SF/AC/NG	Fanless industrial Monitor in metal cased - LCD TFT 46" Full HD - VGA/DVI-D - 230VAC
ELIOS 46SF/IR/AC	Fanless industrial Monitor in metal cased - LCD TFT 46" Full HD - VGA/DVI-D - IR Multi-touch touch screen - 230VAC

Please ask for additional information about **Options & Accessories**.

Packing list

- Power cord CE22 1.80 m (AC~ version)
- Utility CD includes: User's manual
- Utility CD includes: Drivers
- Software Licence (label format)
- Production&Traceability datasheet

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při
objednávce nad 10 000 Kč bez DPH
nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače
s možností jejího prodloužení
až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují
za nižší ceny. Výše slevy se odvíjí
od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme
rozšířenou podporu a servis s garancí
výměny zařízení do 48 hodin.