

# Chassis Monitor

## Chassis Monitor




30" (16:10)

### Specifications




|                                |                                                                                                                                                                                                                                                                                          |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model Name                     | W30L100-CHL1                                                                                                                                                                                                                                                                             |
| Viewable Size Image            | 30"(16:10)                                                                                                                                                                                                                                                                               |
| Active Display Area(mm)        | 641.28 (H) x 335.6 (V)                                                                                                                                                                                                                                                                   |
| Pixel Pitch(mm)                | 0.2505x0.2505                                                                                                                                                                                                                                                                            |
| Number of Pixels               | 2560x1600                                                                                                                                                                                                                                                                                |
| Contrast Ratio                 | 1000:1(typ.)                                                                                                                                                                                                                                                                             |
| Display Color                  | 1.07Billion Color                                                                                                                                                                                                                                                                        |
| Brightness(cd/m <sup>2</sup> ) | 350(typ.)                                                                                                                                                                                                                                                                                |
| Viewing Angle(CR>=10)          | -89~89(H);-89~89(V)                                                                                                                                                                                                                                                                      |
| Recommended Resolution         | 2560x1600@ 60Hz                                                                                                                                                                                                                                                                          |
| Signal Connector               | <ul style="list-style-type: none"><li>• HDMI x 1, with HDMI 1.4 Cable, support to WQHD (2560x1600)</li><li>• Display Port x 1, support to WQHD (2560x1600)</li><li>• DVI x 1, with dual link cable, support to WQHD (2560x1600)</li><li>• D-Sub x 1, support to FHD(1920x1080)</li></ul> |
| Power Source                   | 12VDC in, with External AC to DC Adapter (100~240V AC)                                                                                                                                                                                                                                   |
| Power Consumption              | 86W typical, normal operation                                                                                                                                                                                                                                                            |
| Power Management               | VESA DPMS Compliant                                                                                                                                                                                                                                                                      |
| Plug & Play                    | VESA DDC 1/2B                                                                                                                                                                                                                                                                            |
| Optional Touch Screen          | SAW                                                                                                                                                                                                                                                                                      |
| Operating Temp                 | 0~50                                                                                                                                                                                                                                                                                     |
| Storage Temp                   | -20~60                                                                                                                                                                                                                                                                                   |
| Operating Humidity             | 30%~90%                                                                                                                                                                                                                                                                                  |
| Storage Humidity               | 10%~90%                                                                                                                                                                                                                                                                                  |
| Anti-Vibration                 | Random vibration: 5~ 500Hz<br>Impact acceleration: 1G<br>(follow IEC- 60068-2-64)                                                                                                                                                                                                        |

### Mechanical Drawing

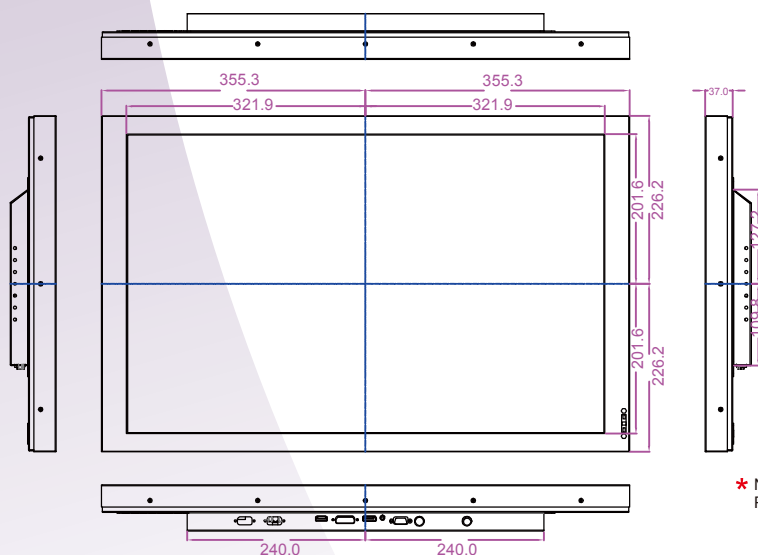

UNIT:mm

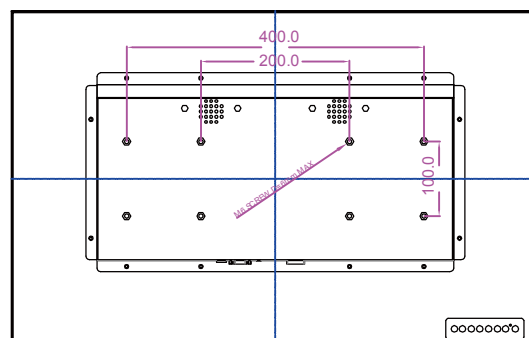

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Revised date: 24-Jun-2016 V1.6

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.