

W10L100-PCH2LB, 10.1-inch Multi-touch Chassis Display

Enhanced User Experience with PCAP Touch and All-Around LED Status Light Bar

The Multi-touch Chassis Display - W10L100-PCH2LB is a 10.1-inch display designed specifically as an interface for smart access control. Ease of cleaning has also been taken into consideration and resulted in the series being built with a true flat surface for easy cleaning and avoiding clogged dust on the edges while delivering superior readability. Experience ultimate access control with all-around programmable LED status light bar for a diverse range of applications including access control systems, conference room management platforms, interactive POS/ kiosk terminals, and many more smart facility control scenarios.



Highlights

- 10.1" 1280 x 800 Resolution with Projected Capacitive Multi-Touch (PCAP)
- VGA and HDMI input
- All-around LED status light bar (RS-232)
- USB port for touch
- Front IP65 waterproof and dustproof
- Stylish design for room booking, access control and room information applications

W10L100-PCH2LB, 10.1-inch Multi-touch Chassis Display

Enhanced User Experience with PCAP Touch and All-Around LED Status Light Bar

Display Specification

Panel Size	10.1" TFT (Wide screen)
Resolution	1280 x 800
Contrast Ratio	800:1 (typ.)
Brightness	350 (typ.) nits ¹
Viewing Angle	-85~85(H); -85~85(V)
Max Colors	16.7M (8 bits/color)
Touch	Projected Capacitive Multi-Touch (PCAP), optional anti-glare coating

Interface

VGA	1 x VGA (D-sub 15)
Power Input	1 x DC Power Jack
HDMI	1 x HDMI (Type-A)

Keyboard and Input

Physical Buttons	OSD Control 5 Keys: -, +, Power, Esc, Enter
LED Indicators	All-around RGB LED status light bar (RS-232 control)
Touch	PCAP touch (USB interface)

Power Management

Power Input	12V DC
Power Consumption	10 W typical, normal operation

Standards and Certification

EMC	CE
Safety	FCC

Mechanical Specifications

Dimensions	263.28 x 171 x 35.7 mm ²
Cutout	157.6 x 249 mm
Mounting	VESA Mount (75x75mm), Panel Mount, Front Side Wall Mount

Environment


Operating Temperature	0 °C to 50 °C
Storage Temperature	10 °C to 60 °C
Operating Humidity	30% to 90% (non-condensing)
IP Rating	Front IP65 waterproof and dustproof

Accessories

Standard

VGA cable (1.8m), HDMI cable (2m)

Drawing ³

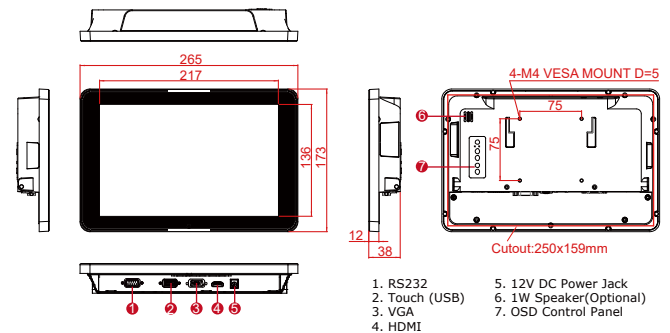

1. Measured at dimming LCD brightness. Varies depending on the usage conditions, or when an external device is attached.
2. Length measurements do not include protrusions. Weight varies with options.
3. This is a simplified drawing and some components are not marked in detail.
4. Accessories and integrated options may vary depending on your configuration.

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při
objednávce nad 10 000 Kč bez DPH
nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače
s možností jejího prodloužení
až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují
za nižší ceny. Výše slevy se odvíjí
od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme
rozšířenou podporu a servis s garancí
výměny zařízení do 48 hodin.