

IP67 G-Win Display

Flat Touch Panel Mount Display


MODEL : R19L100-67FTP

Mechanical Design



Features

- Totally sealed IP67 aluminum compact housing design
- 19-inch 1280x1024 panel with Projected Capacitive Touch
- -10°C to 60°C wide operating temperature
- Fanless, streamlined enclosure for highly efficient heat dissipation
- Rugged Front Anti-Impact Design
- Front control membrane keys Lockable by software
- Full IP67 male connectors with external female cables
- Optical Bonding with Panel and Touch

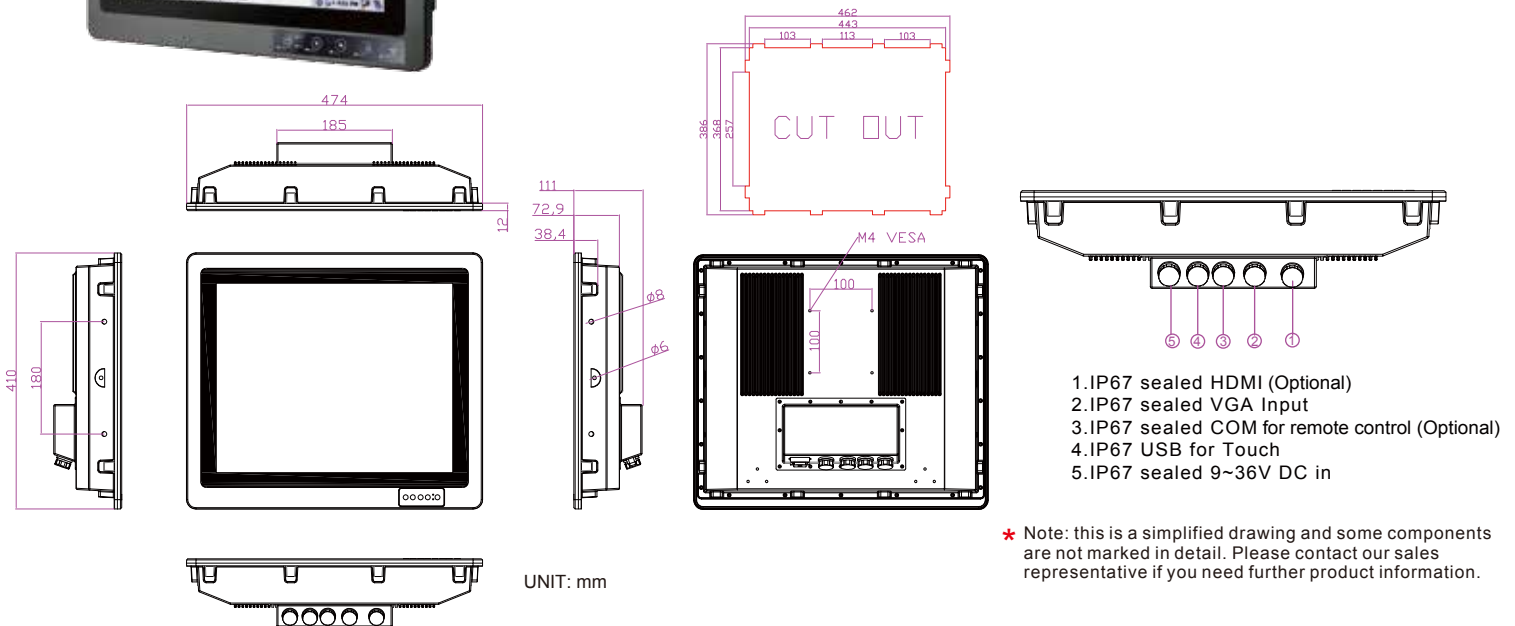

UNIT: mm

System Specifications :

- Model Name : R19L100-67FTP
- Resolutions : 1280 x 1024
- Brightness : 400 cd/m² (typ.) for R19L100-67FTP
1000 cd/m² (optional)
for R19L100-67FTPHB (High Brightness)
- Contrast Ratio : 1000 : 1 (typ.)
- Viewing Angles : -85~85(H); -80~80(V)
- Max Colors : 16.7M
- Recommended Resolution : 1280 x 1024 @ 60Hz~75Hz
- Signal Input : 15 pin D-Sub
- Power Input : 9~36V DC in, with External AC to DC Adapter(100-240V AC)
- Touch Screen : Projected Capacitive (Optional AR Protection glass)

Standards and Certifications

- CE
- FCC
- Shock : Compliant with MIL-STD-810G Method 516.6
- Vibration : Compliant with MIL-STD-810G Method 514.6

Mechanical Specification :

- Mechanical Housing : Panel Mount
- Dimension(W x H x D) : 474mm x 410mm x 111mm
- Gross Weight : 13.5 kg
- Net Weight : 10.0 kg

Power Specifications :

- Power Input : 9~36V DC input

Environment Considerations :

- Operating Temperature : -10 deg.C to 60 deg.C
- Operating Humidity : 5 to 95%

Full IP67 Connectors :

- 1 x IP67 grade Connectors for HDMI (Optional)
- 1 x IP67 grade Connectors for DC 9~36V in
- 1 x IP67 grade Connectors for RS232 Remote Control (Optional)
- 1 x IP67 grade Connectors USB for Touch Screen
- 1 x IP67 grade Connectors for VGA signal in

Accessories :

- 1 x Driver & Manual CD
- 1 x AC to DC 12V 50W Power Adapter
- 4 x IP67 External Cables (USB / VGA / COM (Optional) / Power)


IP67 G-Win Display

Flat Touch Panel Mount Display


MODEL : R19L100-67FTP

Pin Definition


Power Cable

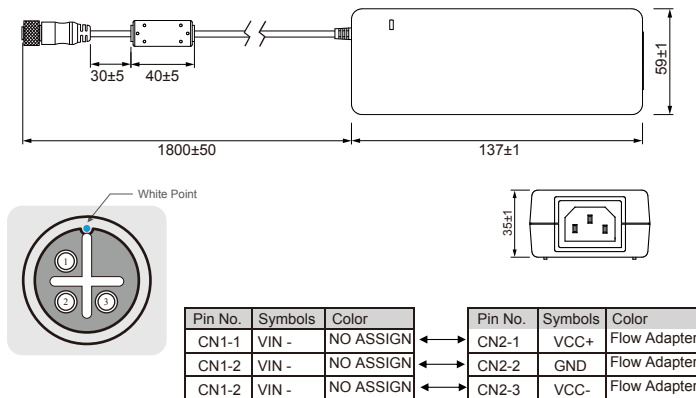


USB Cable (For Touch)

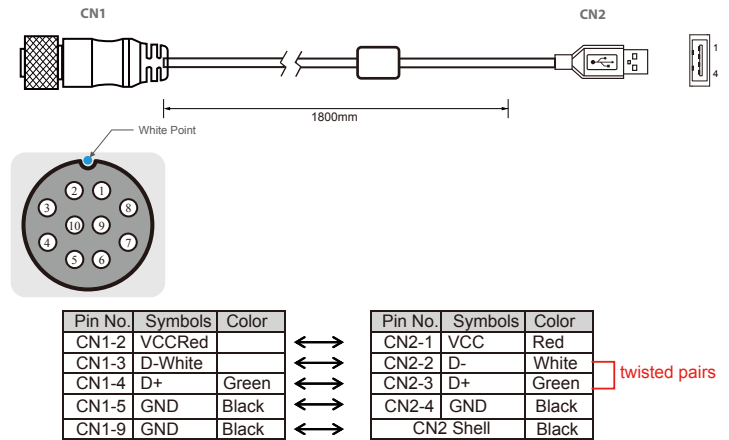


Power Cable

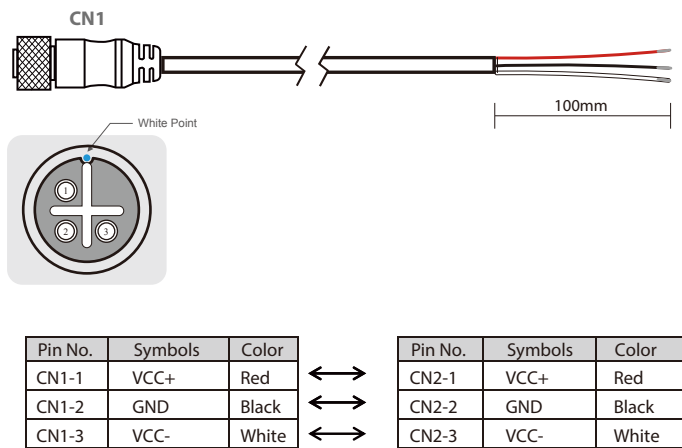


VGA Cable

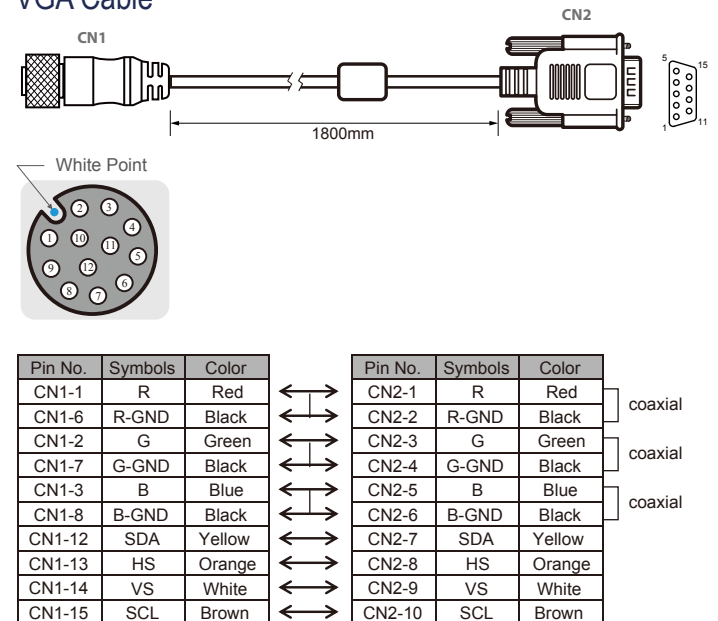

HDMI Cable

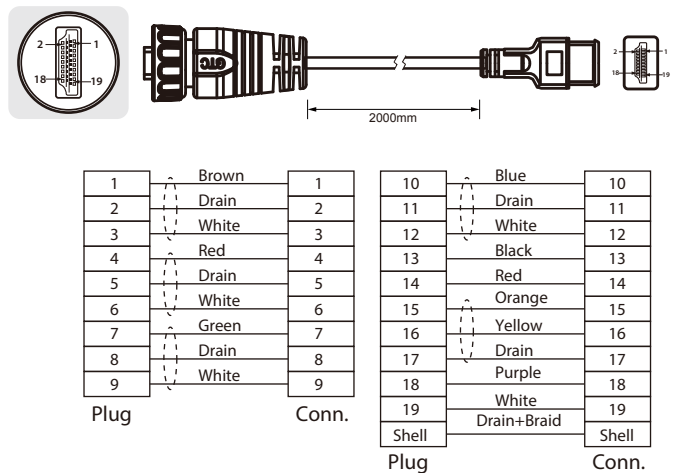

RS232(for remote control) Cable

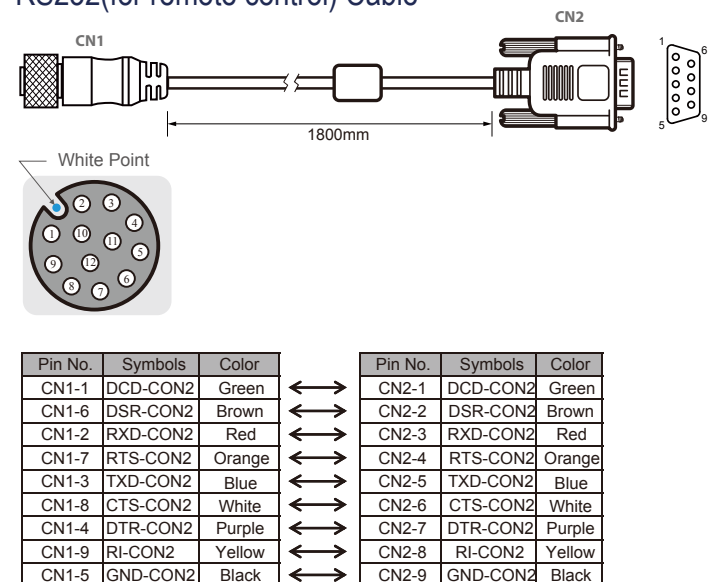

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.