


W18IB7T-IPA2 18.5" Panel PC (Intel Celeron Bay Trial-M N2930 1.83GHz)

Mechanical Design




Ip65 (8 mm front bezel)

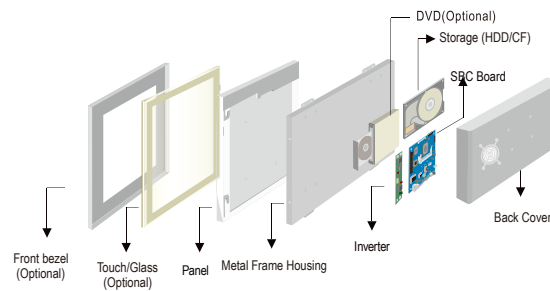

Mechanical design


Dimensions

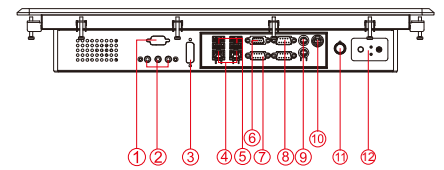

1. RS-232 Conn. (Optional)
2. Audio
3. DVI(Optional)*
4. LAN
5. USB(1 x 3.0, 3 x 2.0)
6. VGA
7. RS232/422/485 Conn
8. RS-232 Conn.
9. PS/2
10. 12V DC-IN
11. Brightness Adjustment Knob
12. OSD Membrane

* Only 2 display output at the same time

Fully Integrated I/O

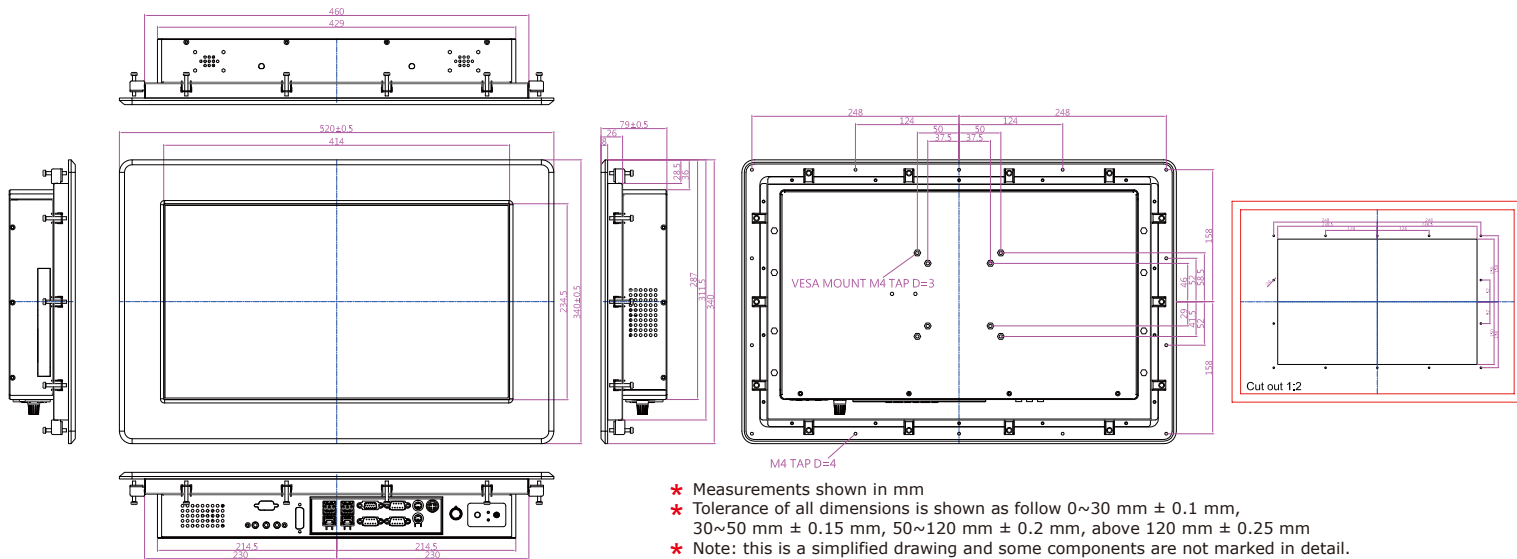

Specifications

System : - CPU : Intel® Celeron® Bay Trial-MN2930 1.83 GHz - Memory Slot : SODIMM DDR3L1600 Max. 8G - System Chipset : Intel® Atom SoC Integrated - IDE/SATA : 1 x SATA II - LAN : Intel® I210-AT GbE LAN x 2 - Audio Codec : Realtek ALC886 HD Audio Codec	Panel Spec : - Size/Type : 18.5" TFT - Resolutions : 1366 x 768 - Brightness : 250 cd/m²(typ.) - Contrast Ratio : 1000 : 1(typ.) - Viewing Angle : -85~85(H); -80~80(V) - Max. Colors : 16.7M (8 bits/colors)										
Input / Output : - Serial Ports : 2 x RS232, 1 x RS232/422/485* - USB Ports : 1 x USB 3.0, 3 x USB 2.0 - Keyboard / Mouse : 2 x PS/2 - Ethernet : 2 x RJ45-10/100/1000 Mbps - VGA : 1 x VGA (female) - Audio : Line-out, Line-in, Mic in * Default setting: RS232	Environment Considerations : - Operating Temperature : 0 deg.C to 50 deg.C - Operating Humidity : 30% to 90% (non-condensing)										
Expansion Slot : 2 x Mini PCIe (1 for WiFi, 1 for 3G Module) 1 x eDP by 2x10 DF-13 connector	OS BSP / Driver Support : Support Windows 10 IoT Enterprise / Windows Embedded 8 / Windows Embedded 7										
Power Specifications : - Power Input : 12V DC IN - Power Consumption : 57W (typ.)(Max.backlight & high CPU load)	Order Options : <table border="1"> <tr> <td>Mechanical : IP65 (8 mm bezel)</td> <td>Storage : 2.5" HDD/ mSATA SSD</td> </tr> <tr> <td>Touch : 5-Wires Resistive (Optional)</td> <td>RAM : SODIMM DDR3L 1600 max. 8Gb</td> </tr> <tr> <td>AR Glass(Optional)</td> <td>OS : Windows 10 IoT Enterprise</td> </tr> <tr> <td></td> <td>Windows 7 Embedded</td> </tr> <tr> <td></td> <td>Windows 8 Embedded (Optional)</td> </tr> </table> (A customized housing is needed if you have demands of SAW/IR/IT/SC touch)	Mechanical : IP65 (8 mm bezel)	Storage : 2.5" HDD/ mSATA SSD	Touch : 5-Wires Resistive (Optional)	RAM : SODIMM DDR3L 1600 max. 8Gb	AR Glass(Optional)	OS : Windows 10 IoT Enterprise		Windows 7 Embedded		Windows 8 Embedded (Optional)
Mechanical : IP65 (8 mm bezel)	Storage : 2.5" HDD/ mSATA SSD										
Touch : 5-Wires Resistive (Optional)	RAM : SODIMM DDR3L 1600 max. 8Gb										
AR Glass(Optional)	OS : Windows 10 IoT Enterprise										
	Windows 7 Embedded										
	Windows 8 Embedded (Optional)										
Accessories : External Adapter : 110~240V Ac-in 12V DC-output Power Adapter											
Security Support : Trusted Platform Module (TPM 1.2)											

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.