



Military Grade

Military Display

R15L100-MLC3HB

Feature:

- ♦ High Quality 15" Panel, 1024 x 768 resolution, 800 nits
- ♦ Aluminum Housing with Anti-Corrosion Treatments
- ♦ Military Grade connector with VESA mount.
- ♦ MIL-STD-810F/G
- ♦ Built-in Ambient Light sensor

Option feature:

- ♦ 5 Wire Resistive Touch/ Anti-Reflective Protection Glass
- ♦ Wide Range 9 to 36V DC Input Acceptable
- ♦ Customized Military Connector type
- ♦ MIL-STD-461E/F (By Request)
- ♦ EMI Glass/Touch (By Request)



G-WIN



R15L100-MLC3HB




Test item	R15L100-MLC3HB
MIL-STD-810F/G *Vibration	✓
MIL-STD-810F/G *Shock	✓
MIL-STD-810F/G Humidity	✓
MIL-STD-810F/G Drop(Package)	✓
MIL-STD-810F/G High temperature	✓
MIL-STD-810F/G Low temperature	✓

* If you require external test report, Winmate will charge NRE fee.

Drawing w/ Mounting Bracket

(Bracket is Optional)

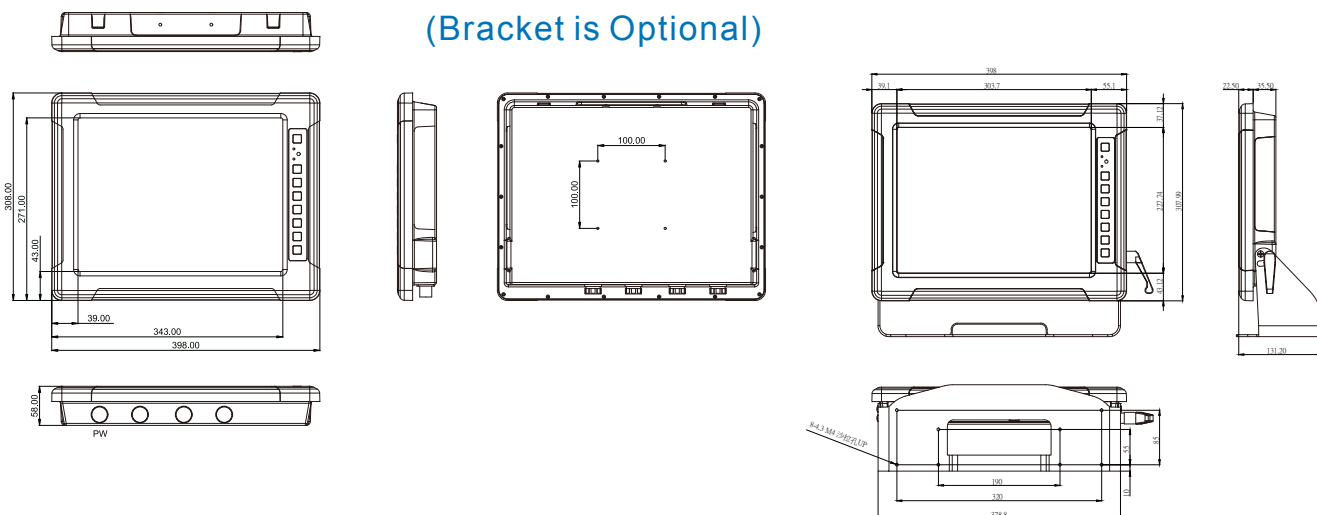

Display Specification

Size : 15 inch
Resolution : 1024x768 pixels
Brightness : 800 (cd/m)
Touch : 5 Wire Resistive (Optional)
Glass : AR Glass (Default)

Mechanical and Environment

Dimensions (W x L x H) : 398 mm x 308 mm x 58mm
Operation Temperature : -10 deg.C to 55 deg.C
Operation Humidity : 10% to 95% (non condensing)
Shock* : Operating:40g for 11ms
Vibration* : Operating: 1.62/2.02/2.20g rms for XYZ / 5-500Hz

In Front Control

Control button : Power On/ Off, Menu,Auto, Brightness up& down, LED adjustment

LED indicator : Power Status, Sleep status

Environmental(MIL-STD 810F/G Compliance)

Vibration : MIL-STD-810F/G Method 514.5
Humidity : MIL-STD-810F/G Method 507.4
Transit Drop : MIL-STD-810F/G Method 516.5
High Temperature : Storage:MIL-STD-810F/G Method501.4
Operation:MIL-STD-810F/G Method501.4
Low Temperature : Storage:MIL-STD-810F/G Method502.4
Operation:MIL-STD-810F/G Method502.4

Environmental(MIL-STD 461 E/F Compliance)

RE : RE 101 / RE 102
CE : CE 101 / CE 102
Optional with EMI Glass / Touch
CS : RS 101 / RS 103
CS : CS 101 / CS 106 / CS 109 / CS 114
CS 115 / Cs116


I/O Spec

Spec	R15L100-MLC3HB
Connector type	Mil Circular type
VGA	JY27466T11F35PN
USB/RS232	JY27466T11F35PN
Power (9~36V DC)	JY27466T09F98PN
Wide Voltage	9~36V (Isolated Power)
Optional Touch	Resistive
AR glass	Yes(default)
EMI glass/Touch	By Request

Environment Spec

Test Item	R15L100-MLC3HB
Dust/Water proof	IP 65 (except IO part)

Front OSD control function:

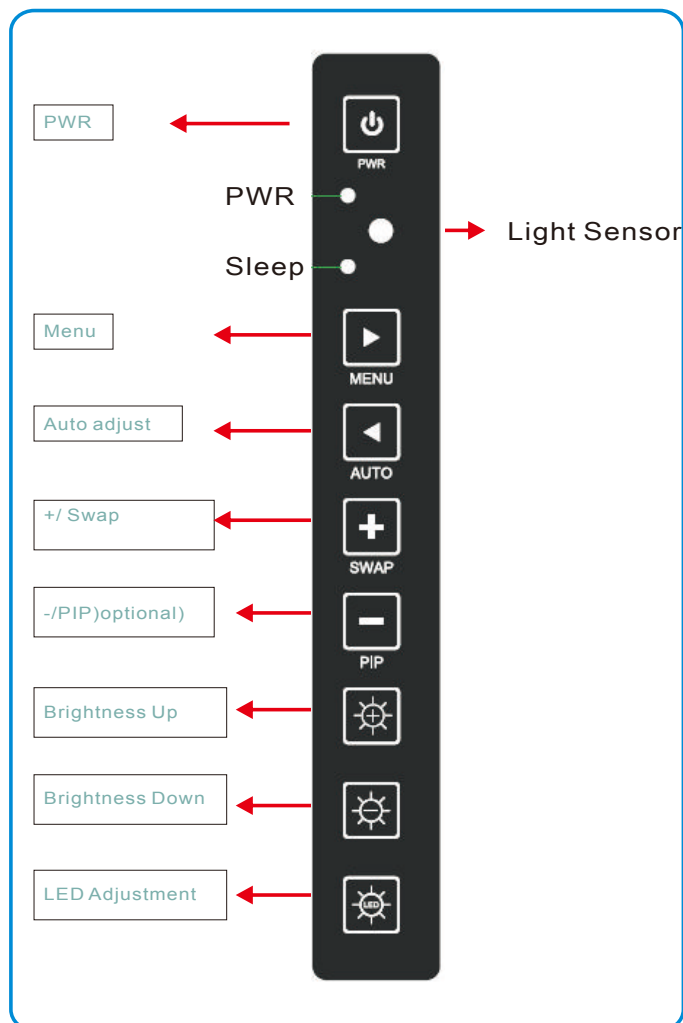

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.