

IBDRW100-EX-P

Intel® Atom® E3950 ATEX Rugged Box PC (C1D2 Certified)



KEY FEATURES

- Class 1, Division 2 device certified for hazardous area application
- DIN Rail design for Industrial Automation applications
- Onboard Intel® Atom® Processor E3950 1.6 GHz, up to 2.0 GHz
- 1 x RS232 / 422 / 485 communication, select thru BIOS
- 4 x Giga LAN, 3 x USB 3.0, 1 x USB 2.0, 1 x VGA, 1 x Line out, 1 x line in, 1 x Mic in, 1 x Power Jack
- Fanless, streamlined enclosure for highly efficient heat Dissipation
- -40°C~70°C wide operation temperature range
- AWS IoT Greengrass Certified, ATEX rugged box pc



SPECIFICATIONS

System Specification

WLAN	Support (Optional)	BT	Support (Optional)
Expansion Port	1 x M.2 2230 E-key (for half size Wifi module) 1 x M.2 2242 B-key Slot (for SSD)	Processor	Intel Atom E3950 1.6GHz (up to 2GHz) Intel Atom E3940 1.6GHz (up to 1.8GHz) Intel Atom E3930 1.3GHz (up to 1.8GHz)
Memory	1 x SO-DIMM, DDR3L 1866 MHz, 4GB 8GB (Optional)	Storage	1 x M.2 2242 B-key SSD 128GB M.2 2242 B-key SSD up to 512GB (Optional) 1 x SATA III for 2.5" SSD/HDD (Optional)
Ethernet controller	4 x Intel® Ethernet Controller	Security	TPM 2.0
Operating System	Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 20.04 (Optional)		

Mechanical

Dimension	139 x 65.4 x 152 mm	Mounting	Din-Rail Mounting
Enclosure	Aluminum Housing	Cooling System	Fanless design

Environment

Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	-40°C to 70°C
Storage Temperature	-40°C to 80°C	Shock	MIL-STD-810G Method 516.6 Procedure I (Optional)
Vibration	MIL-STD-810G Method 514.6 Procedure I		

Certification


Certification	CE, FCC, IC Ordinary Location Safety : UL/CSA 62368-1 Hazardous Location Safety: Class 1, Division 2, Group A, B, C, D Temperature Code T5
----------------------	--

IO Ports

Power Input	1 x 9~36V DC, 3-Pin Terminal Block	USB Port	3 x USB3.2 Gen1x1 (Type-A) 1 x USB2.0 (Type-A)
Serial Port	1 x RS232/422/485 (Default RS232) 1 x RS422/485 (Default RS422)	Video	1 x VGA
Audio	Mic in Line in	Expansion Port	1 x M.2 2230 E-key (for half size Wifi module)

	Line out		
LAN	4 x Giga LAN RJ45 Connector	Indicator	1 x LED Indicator for power 1 x LED Indicator for storage
DIDO	Terminal block with digital 9 in / 9 out (Optional)		
Control			
Button	1 x Power Button		
Accessory			
Accessory	100~240V AC to DC Adapter Power Cord 2 x Terminal Block 10 pin fconnector for DIDO Open Wire Cable with terminal block connector Terminal Block 3 pin to 2.5Ø Female Adapter Cable Din Rail Mounting kits Cable Holder kits		
Power			
Power Rating	9V to 36V DC with isolation, 3-Pin Terminal Block	Adapter	12V 84W

DIMENSIONS UNIT:MM

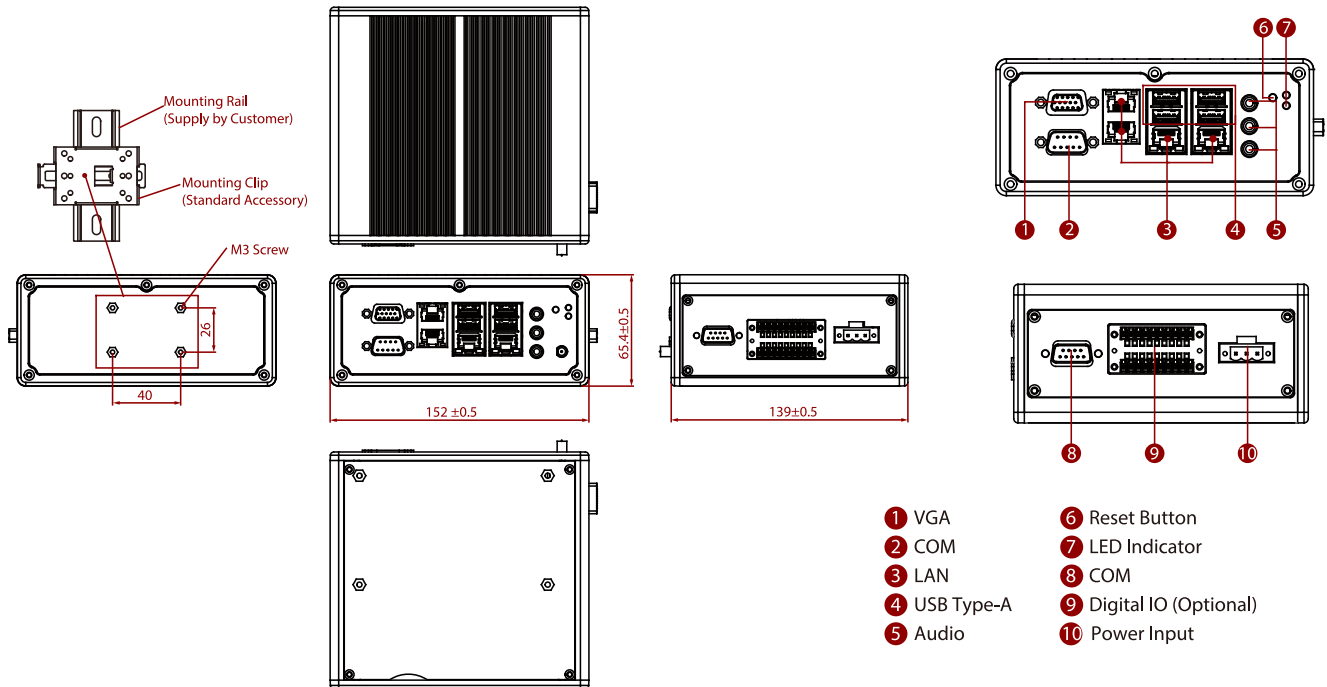

NOTE

1. Total usable memory will be less dependent upon actual system configuration.
2. Length measurements do not include protrusions. Weight varies with options.
3. Measured at maximum backlight and high CPU load.
4. Accessories and integrated options may vary depending on your configuration
5. This is a simplified drawing and some components are not marked in detail.
6. All specifications are subject to change without prior notice.
7. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.