

R17IB7T-RKM1

17" Intel® Celeron® N2930 Rack Mount Panel PC



KEY FEATURES

- 17" TFT LCD
- Intel® Celeron® Bay Trail-M N2930, 1.83 GHz
- SODIMM DDR3L 1600/1333, max. 8 GB
- Intel® I210-AT GbE LAN
- 2 x RS232, 1 x RS232/422/485, 1 x USB 3.0, 3 x USB 2.0, 2 x PS/2, 2 x RJ45, 1 x VGA, 2 x Mini PCIe (1 for WiFi, 1 for 3G Module), 1 x eDP
- 2 x Mini PCIe (1 for WiFi, 1 for 3G Module), 1 x eDP



SPECIFICATIONS

Display	
Resolution	1280x1024
Contrast Ratio	1000:1
View Angles	85,85,80,80
Touch / Glass	Resistive Touch Screen (Optional) Protection Glass Without Touch Function (Optional)
Size	17 inches
Panel Brightness	350 nits
Active Area	337.920x270.336 mm
System Specification	
Processor	Intel Celeron N2930 1.83GHz (up to 2.16GHz)
Storage	1 x mSATA SSD 128GB mSATA SSD up to 512GB (Optional) 1 x SATA II for 2.5" HDD (Optional)
Operating System	Windows 7 Embedded Systems (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 20.04 (Optional)
Memory	2 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional)
BT	Support (Optional)
Ethernet controller	2 x Intel® Ethernet Controller
WLAN	Support (Optional)
Mechanical	
Dimension	482.6 x 399 x 92 mm
Enclosure	Metal Housing
Mounting	VESA Mount Rack Mount (9U)
Cooling System	Fanless design
Environment	
Operating Humidity	10% to 90% RH, Non-Condensing
Storage Temperature	-10°C to 60°C
Operating Temperature	0°C to 50°C
Certification	
Certification	CE, FCC
IO Ports	
Power Input	1 x 12V DC, Din4 pin connector
Serial Port	1 x RS232/422/485 (Default RS232) 2 x RS232 1 x RS232 (Optional)
USB Port	1 x USB3.2 Gen1x1 (Type-A) 3 x USB2.0 (Type-A)
Video	1 x VGA

Audio	Mic in Line in Line out	Expansion Port	2 x mPCIe slot
LAN	2 x Giga LAN RJ45 Connector	Indicator	1 x LED Indicator for power 1 x LED Indicator for storage
Brightness Knob	1 x Brightness Adjustment Knob	PS/2	2 x PS/2
mini PCIe	3 x Mini PCIe		
Control			

Button	1 x Power Button 1 x Reset Button
---------------	--------------------------------------


Accessory

Accessory	100~240V AC to DC Adapter Power Cord VESA screws
------------------	--

Power

Power Rating	12V DC (Lockable Power Jack)	Adapter	12V 84W
---------------------	------------------------------	----------------	---------

DIMENSIONS UNIT:MM

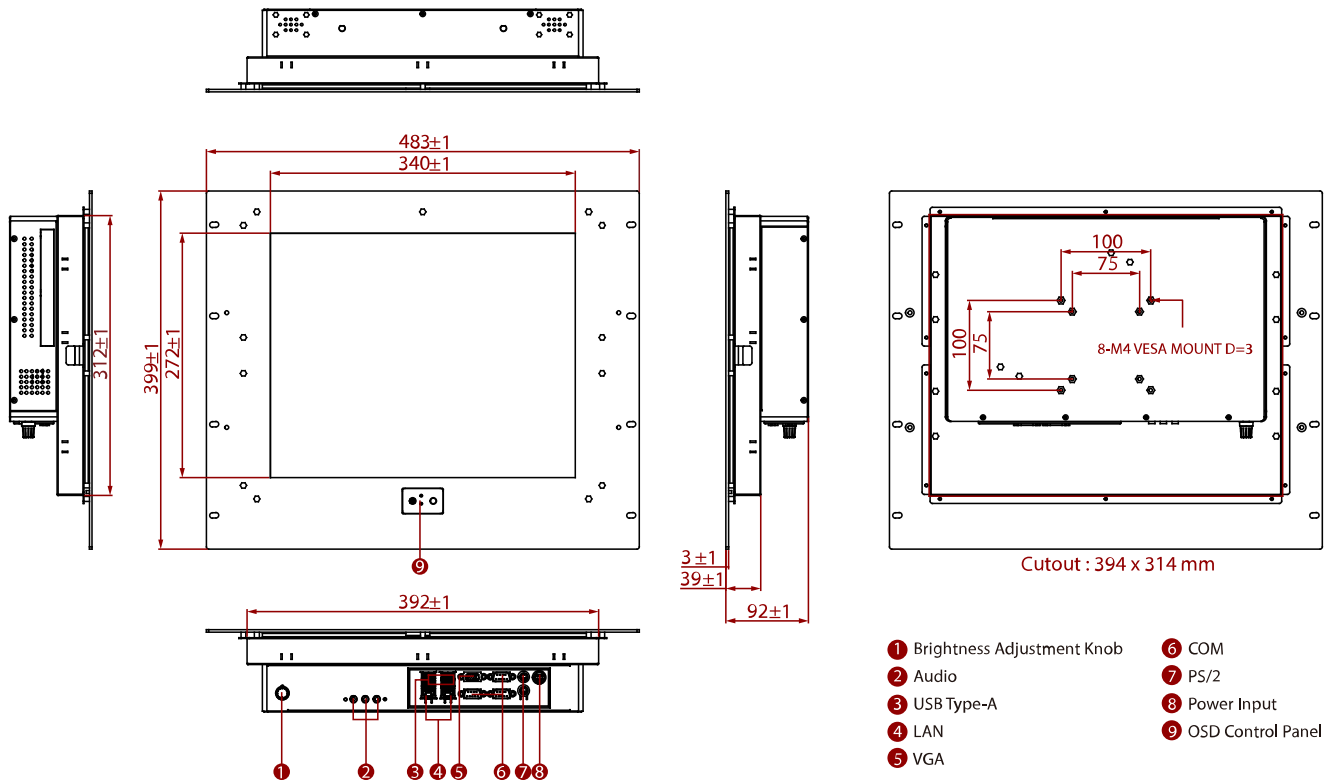

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.