

# W18L100-CHA3HB

## 18.5" Chassis High Brightness Display



### KEY FEATURES


- 18.5", 1920 x 1080
- VGA and HDMI input
- Chassis
- VESA mount
- High brightness



### SPECIFICATIONS

| Display                      |  |
|------------------------------|--|
| <b>Resolution</b>            | 1920x1080  |
| <b>Contrast Ratio</b>        | 1000:1   |
| <b>Display Color</b>         | 16.7M Colors   |
| <b>Active Area</b>           | 408.96x230.04 mm   |
| <b>Size</b>                  | 18.5 inches  |
| <b>Panel Brightness</b>      | 1000 nits  |
| <b>View Angles</b>           | 89,89,89,89  |
| <b>Touch / Glass</b>         | Resistive Touch Screen (Optional)<br>Protection Glass w/o Touch Function (Optional)                                    |
| Environment                  |  |
| <b>Operating Humidity</b>    | 10% to 90% (non-condensing)  |
| <b>Storage Temperature</b>   | -10~60°C   |
| <b>Operating Temperature</b> | 0~50°C   |
| Certification                |  |
| <b>Certification</b>         | CE, FCC  |
| IO Ports                     |  |
| <b>USB Port</b>              | 1 x USB for Touch Screen   |
| <b>Audio</b>                 | Audio line in (3.5mm) (Optional)<br>2 x Speaker (Optional)   |
| <b>Video</b>                 | 1 x VGA<br>1 x HDMI (Optional)<br>1 x DVI (Optional)   |
| Mechanical                   |  |
| <b>Dimension</b>             | 437.3 x 264.5 x 50 mm  |
| <b>Enclosure</b>             | Metal  |
| <b>Mounting</b>              | VESA Mount   |
| <b>Cooling System</b>        | Fanless Design   |
| Accessory                    |  |
| <b>Accessory</b>             | 1 x VGA cable<br>1 x HDMI cable<br>100~240V AC to DC Adapter<br>Power Cord<br>Manual<br>VESA screws(Varies by product) |
| <b>Optional Accessory</b>    | Remote Controller (Optional,Varies by product)   |
| Power                        |  |
| <b>Power Rating</b>          | 12V DC input   |
| Control                      |  |
| <b>Button</b>                | 5 Keys: -, +, Power, Esc, Enter  |

## DIMENSIONS UNIT:MM

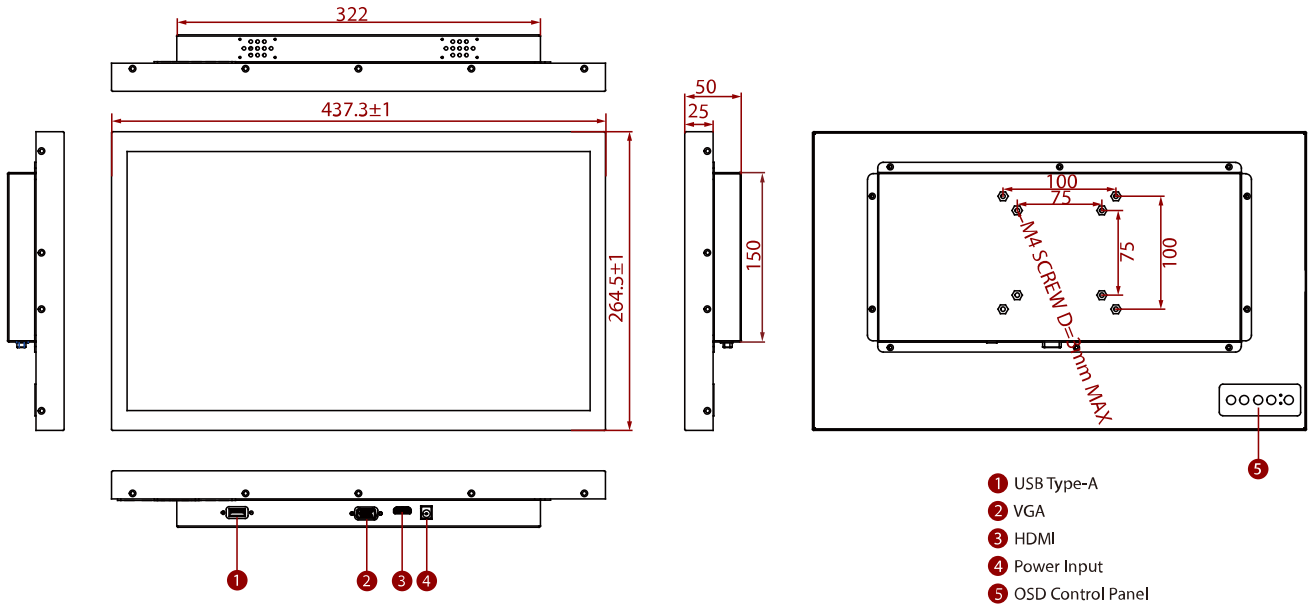

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 [obchod@autocont-ipc.cz](mailto:obchod@autocont-ipc.cz)

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.