

# R10IE3S-67T2ST

## 10.4" Intel® Celeron® N6211 IP67 Stainless Resistive Chassis Panel PC



### KEY FEATURES

- Intel® Celeron® Elkhart Lake N6211 Processor
- Fanless Design
- Full IP67 Dust / Water Resistant
- Stainless Housing with Anti-Corrosion Treatment
- Optical Bonding with Anti-moisture Treatment
- 5 Wire Resistive Touch / Anti-Reflection Protection Glass (Optional)



### SPECIFICATIONS

| Display                    |   |                              |   |
|----------------------------|---|------------------------------|---|
| <b>Resolution</b>          | 1024x768  | <b>Size</b>                  | 10.4 inches   |
| <b>Contrast Ratio</b>      | 1000:1  | <b>Panel Brightness</b>      | 350 nits  |
| <b>View Angles</b>         | 88,88,88,88   | <b>Active Area</b>           | 210.4x157.8 mm  |
| <b>Touch / Glass</b>       | Resistive Touch Screen Bonding With Panel Protection Glass Without touch function (Optional)                                    |                              |   |
| System Specification       |   |                              |   |
| <b>WLAN</b>                | Support (Optional)  | <b>BT</b>                    | Support (Optional)  |
| <b>Processor</b>           | Intel® Celeron® N6211 (1.5M Cache, up to 3.0GHz)<br>Intel® Celeron® N6210 (1.5M Cache, up to 2.6GHz) (Optional)                 | <b>Memory</b>                | 1 x SO-DIMM, DDR4 3200 MHz, 4GB<br>8GB (Optional)<br>16GB (Optional)  |
| <b>Storage</b>             | 1 x M.2 2242 B-key SSD 128GB<br>M.2 2242 B-key SSD up to 512GB (Optional)<br>1 x SATA III for 2.5" SSD/HDD up to 1TB (Optional) | <b>Ethernet controller</b>   | 2 x Intel® Ethernet Controller  |
| <b>Security</b>            | TPM 2.0   | <b>Operating System</b>      | Windows 11 IoT Enterprise SAC (64 bit) (Optional)<br>Windows 10 IoT Enterprise (64 bit) (Optional)<br>Linux Ubuntu 22.04 (Optional) |
| Mechanical                 |   |                              |   |
| <b>Dimension</b>           | 311 x 257 x 47.4 mm   | <b>Mounting</b>              | VESA Mount<br>Yoke Mount  |
| <b>Enclosure</b>           | Stainless Housing   | <b>Cooling System</b>        | Fanless design  |
| Environment                |   |                              |   |
| <b>Operating Humidity</b>  | 10% to 90% RH, Non-Condensing   | <b>Operating Temperature</b> | 0°C to 45°C   |
| <b>Storage Temperature</b> | -20°C to 60°C   | <b>IP rating</b>             | IP67  |
| Certification              |   |                              |   |
| <b>Certification</b>       | CE, FCC   |                              |   |
| IO Ports                   |   |                              |   |
| <b>Power Input</b>         | 1 x M12 waterproof connector for 12V DC   | <b>USB Port</b>              | 1x M12 waterproof connector for 2 x USB2.0  |
| <b>Serial Port</b>         | 1 x M12 waterproof connector for RS232  | <b>LAN</b>                   | 1 x waterproof Giga LAN RJ45 connector  |
| <b>Indicator</b>           | 1 x LED Indicator for power<br>1 x LED Indicator for storage  |                              |   |

**Control**

|               |                                      |
|---------------|--------------------------------------|
| <b>Button</b> | 1 x Power Button<br>1 x Reset Button |
|---------------|--------------------------------------|


**Accessory**

|                  |   |
|------------------|---|
| <b>Accessory</b> | 100~240V AC to DC Adapter with waterproof connector<br>Power Cord<br>External USB cable with waterproof connector<br>External COM cable with waterproof connector<br>External LAN cable with waterproof connector<br>Waterproof caps<br>VESA screws |
|------------------|---|

**Power**

|                     |                   |
|---------------------|-------------------|
| <b>Power Rating</b> | 12V DC (M12 type) |
|---------------------|-------------------|

**DIMENSIONS** UNIT:MM

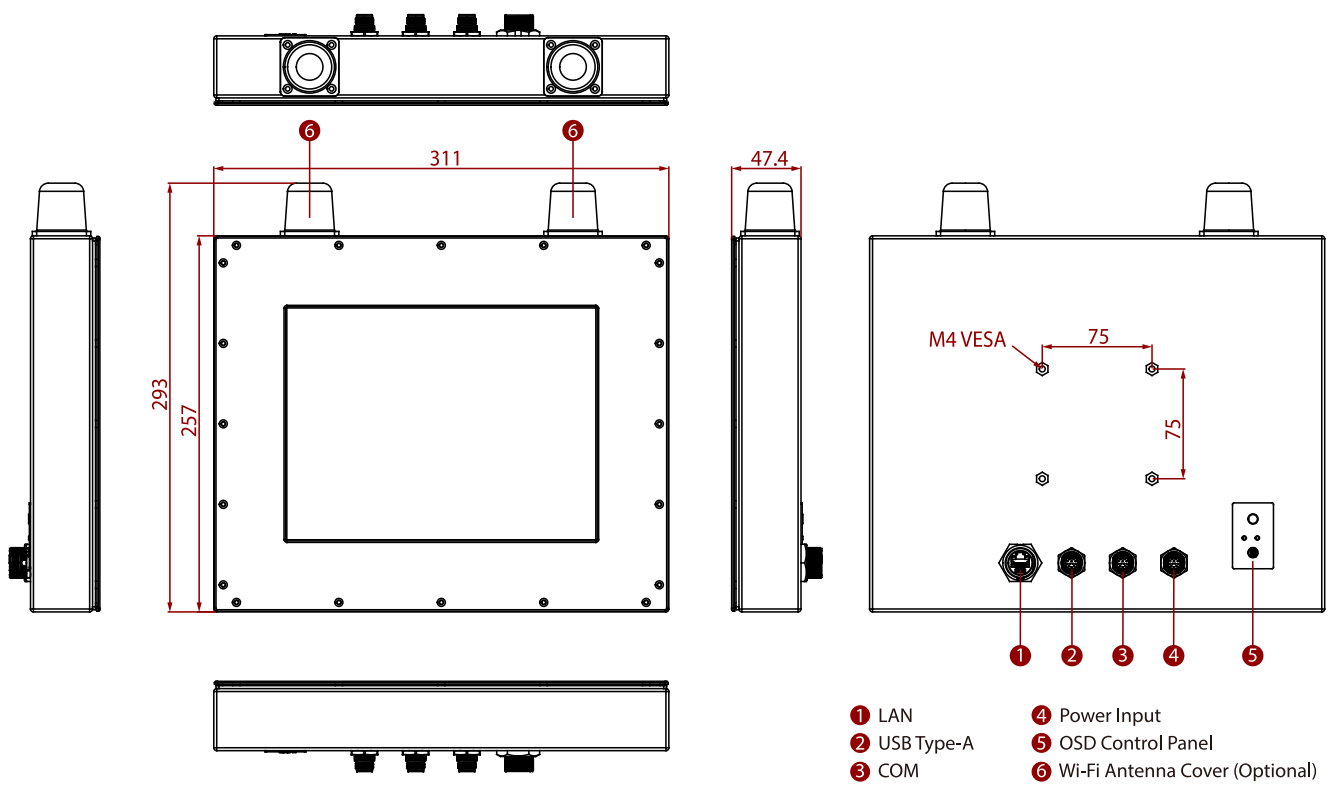

**NOTE**

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 [obchod@autocont-ipc.cz](mailto:obchod@autocont-ipc.cz)

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.