


W10IQ3S-GCH2

10.1" Qualcomm® Snapdragon™ 660 G-WIN GC-Series Front IP65 PCAP Panel PC

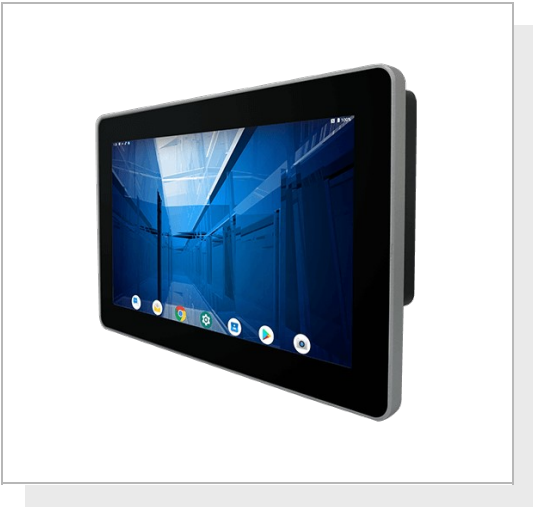

KEY FEATURES

- Qualcomm® Snapdragon™ 660 octa-core, 2.2 GHz CPU
- Fanless cooling system and ultra-low power consumption
- Front IP65 for protection against water and dust
- A true flat, easy-to-clean front surface with edge-to-edge design
- Plenty of I/O, including 1 x USB 3.0 OTG, 2 x USB 2.0; 1 x RS232/422/485; 1 x RJ45; 1 x Micro SD Slot; 1 x Micro HDMI (Optional);




SPECIFICATIONS

| System Specification | | | |
|----------------------------|--|------------------------------|-----------------------------------|
| Processor | Qualcomm® Snapdragon™ 660 (Octa-Core 2.2 GHz) | Memory | 3GB LPDDR4 |
| Storage | 32GB eMMC | Operating System | Android 9.0 |
| WLAN | Support (Optional) | BT | Support (Optional) |
| Display | | | |
| Resolution | 1280x800 | Size | 10.1 inches |
| Contrast Ratio | 800:1 | Panel Brightness | 350 |
| View Angles | 85,85,85,85 | Active Area | 216.96 x135.6 mm |
| Touch / Glass | Projected Capacitive Multi Touch Screen | | |
| IO Ports | | | |
| USB Port | 2 x USB 2.0 (Type A), 1 x USB 3.0 (Type-C) | Serial Port | 1 x RS232/422/485 (Default RS232) |
| SD Card Slot | 1 x Micro SD Card Slot | Video | 1 x Micro HDMI (Optional) |
| Audio | 1 x Speaker (Optional) | LAN | 1 x LAN |
| Certification | | | |
| Certification | CE, FCC | | |
| Power | | | |
| Power Rating | 12V DC with Terminal Block 9~36V (Optional) | Adapter | 12V 50W |
| Mechanical | | | |
| Dimension | 262 x 172 x 40.2 mm | Mounting | VESA Mount/ Panel Mount |
| Enclosure | Aluminum | Cooling System | Fanless Design |
| Environment | | | |
| Operating Humidity | 10% to 90% (Non-Condensing) | Operating Temperature | 0~50°C |
| Storage Temperature | -20~60°C | Shock | MIL-STD-810G Method 516.6 |
| Vibration | MIL-STD-810G Method 514.6 | IP rating | Front IP65 |
| Accessory | | | |

| | |
|------------------|--|
| Accessory | Quick Start Guide(Hardcopy) AC Adapter 12V/50W Power Cord 3 Pin Terminal Block to DC Jack |
| Control | |
| Button | 1 x Power Button (Optional) |

DIMENSIONS UNIT:MM

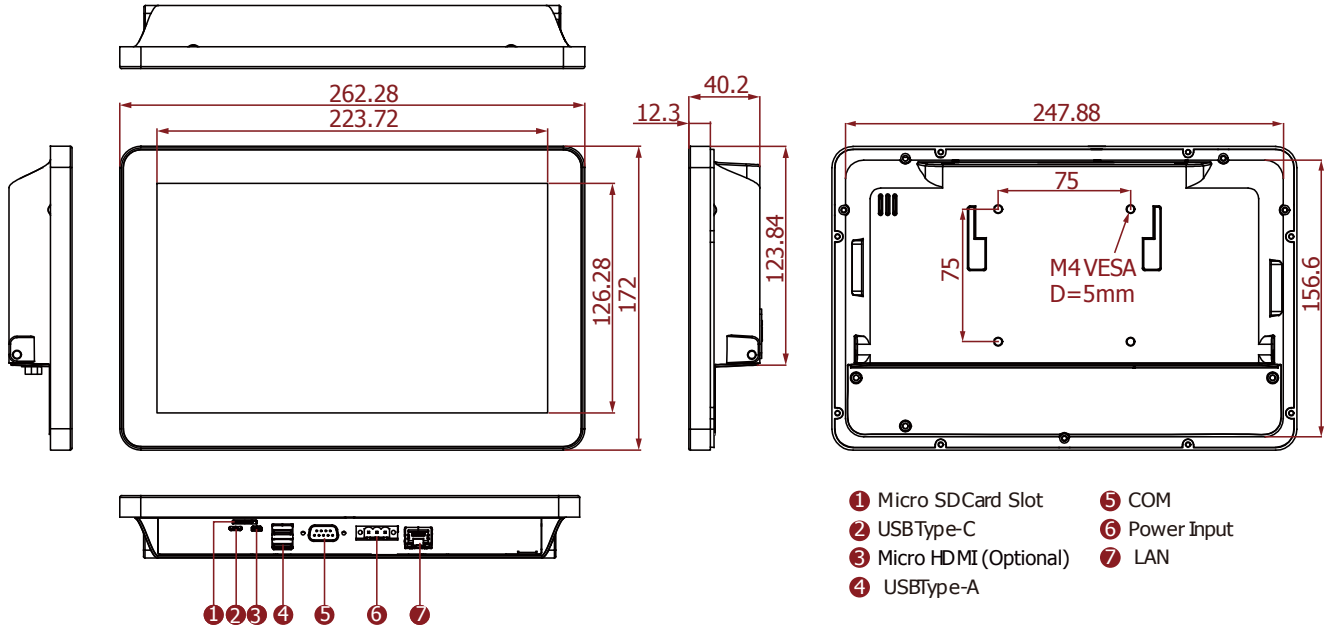

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
4. All specifications are subject to change without prior notice.

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.